

Pressure & Level Measurement Solutions



Pressure Gauges
Dial Indicating
Differential
Sanitary
Digital

Pressure & Level
Transducers &
Transmitters
Industrial
OEM
Hazardous Location
Sanitary

Pressure Switches

Options & Accessories



At NOSHOK, we pride ourselves on being innovators in the industry by continually offering the latest technology and measurement solutions, and providing the best customer support in the marketplace.

Established in 1967, NOSHOK was one of the first companies to offer liquid filled pressure gauges. We also took a bold step by backing our quality gauges with an extended 3-year warranty. That unwavering standard of quality has endured for over 50 years, and as we have expanded our product offering we continue to provide industry-leading warranties. NOSHOK also leads the industry as one of the first companies to offer corrosion-resistant zinc nickel plating standard on our carbon steel valves.

We have the capacity to put together special requirements which are so often hard to find. If you do not find what you need in this catalog, chances are we can still put a solution together.

NOSHOK is committed to providing excellence on every level. Thank you for choosing NOSHOK products.



Jeff N. Scott
President



NOSHOK Corporate Headquarters
Your Single Source Instrumentation Company

NOSHOK is a member and actively supports:

THE **FPDA** 
MOTION & CONTROL NETWORK

ASME
SETTING THE STANDARD

ASSOCIATION FOR
HIGH TECHNOLOGY
DISTRIBUTION **AHD**

fisa
Distributors Serving
Sanitary Processing

NOSHOK is an ISO 9001:2015 registered company.

WARRANTY INFORMATION

NOSHOK's **Five Year Warranty** applies to our 1000 and 1100 Series differential gauges.

Our **Three Year Warranty** applies to our 300, 500, 502, 660, 760, and 900 Series liquid filled gauges; 10 Series liquid filled sanitary gauges; 1000 Series digital gauge; 100, 200, 300, 611, 612, 613, 615/616, 621/622, 623/624, 625/626, 627, 640, 650, 660 and 800 Series transmitters & transducers; 11, 20, 25 and 30 Series sanitary transmitters, and 500, 800 Series electronic switch products.

Our **One Year Warranty** applies to our 100, 200, 400, 402, 640, 740, and 800 Series dry gauges; 10 Series dry sanitary gauges; 100, 200, 300 and 400 Series mechanical switch products, and 628 Series intrinsically safe hammer union transmitter.

NOSHOK guarantees all products to be free from defects in material and workmanship, to remain within catalogued accuracy specifications, and to operate within the catalogued performance specifications. These products must be operated within the catalogued environmental and application parameters. Determination of failure will be made by NOSHOK, Inc.'s equipment and personnel or a certified test facility specializing in this type of evaluation. Instrument failures determined to be caused by over-range, incompatibility with environment or product media and abuse will not be considered under this warranty. NOSHOK, Inc. will, at its discretion, repair or replace the instrument without cost to the customer.

Limitations which apply are: Bourdon tube pressure gauges must be used within their calibrated maximum range to prevent damage. Pressure gauges must be operated within the following working pressure limits: Dynamic pressure application, 60% of the dial range; Static pressure applications, where no sharp fluctuations occur, 90% of the dial range. The gauges must be operated within specified ambient temperature ranges.

CAUTION:

Operating conditions including, but not limited to, system pressure, media compatibility and ambient conditions must be considered when selecting gauges and accessories, improper selections and use of gauges could possibly cause gauge failure and lead to possible property damage or personal injury. Refer to the American National Standard ASME B40.1 for the correct selection and use of dial indicating gauges.

T A B L E O F C O N T E N T S



DIAL INDICATING PRESSURE GAUGES

ABS & Steel Case, Dry: 100 SERIES	6-9
Low Pressure Diaphragm: 200 SERIES	10-13
Brass Case, Liquid Filled: 300 SERIES	14-17
All Stainless Steel, Dry & Liquid Filled: 400/500 SERIES	18-21
All Stainless Steel, Dry & Liquid Filled, Extreme High Pressure: 402/502 SERIES	22-25
Process: 600/700 SERIES	26-27
Precision Test: 800 SERIES	28-29
ABS & Stainless Steel Case, Liquid Filled: 900 SERIES	30-33



T A B L E O F C O N T E N T S

DIFFERENTIAL PRESSURE GAUGES

Piston Type: 1000 SERIES	34-37
Diaphragm Type: 1100 SERIES	38-41

SANITARY PRESSURE GAUGES

Fractional: 10 SERIES	42-43
Heavy-Duty: 10 SERIES	44-45

DIAL INDICATING PRESSURE GAUGE OPTIONS & ACCESSORIES

Panel Mounting Flanges, Cases & Cover Rings, Lenses, Maximum Indicating Pointer, Set Pointers, Rubber Case Protectors, Recalibrators & Adjustable Pointers, Overpressure Protection, Ammonia Refrigeration Gauges, Liquid Filling Options, Special Connections, Reid Vapor Test Gauges, Metric Dials & Customized Special Dials, Certified Calibration, Magnetic Spring Contact Switch	46-49
Options & Accessories by Gauge Series	50-53
Gauge Fill Options	53
Accuracy/Standard Dial Configurations	54-59

DIGITAL PRESSURE GAUGE

Digital Gauge: 1000 SERIES	60-61
-------------------------------------	-------

INDUSTRIAL PRESSURE & LEVEL TRANSMITTERS & TRANSDUCERS

Current Output: 100 SERIES	62-63
Voltage Output: 200 SERIES	64-65
Small Diameter Submersible Level: 611 SERIES	66-67
Submersible Level: 612 SERIES	68-69
Cage-Protected Submersible Level: 613 SERIES	70-71
High Accuracy: 615/616 SERIES	72-73
Precision: 640 SERIES	74-75
Micro-sized: 660 SERIES	76-77
Electronic Indicating Pressure Transmitter/Switch: 800 SERIES	78-79

OEM TRANSMITTERS & TRANSDUCERS

Compact: 300 SERIES	80-81
High Volume: 650 SERIES	82-83
Explosion-Proof: 621/622 SERIES	84-85

HAZARDOUS LOCATION PRESSURE & LEVEL TRANSMITTERS

Non-Incendive: 623/624 SERIES	86-87
Intrinsically Safe: 625/626 SERIES	88-89
Intrinsically Safe Submersible Level: 627 SERIES	90-91
Intrinsically Safe Hammer Union: 628 SERIES	92-93

SANITARY PRESSURE TRANSMITTERS

ASME-BPE Sanitary Clamp: 11 SERIES	94-95
Intelligent Silo and Tank Level Transmitter: 20 SERIES	96-99
Intelligent Pressure and Level Transmitter: 25 SERIES	100-101
"SNORKEL" Pressure and Level Transmitter: 30 SERIES	102-105

PRESSURE SWITCHES

Mechanical Compact SPST: 100 SERIES	106-109
Mechanical Compact SPDT: 200 SERIES	110-117
Mechanical Compact SPDT with Adjustable Hysteresis: 300 SERIES	118-121
Mechanical Heavy-Duty: 400 SERIES	122-125
Electronic Indicating Pressure Transmitter/Switch: 800 SERIES	126-127

ALL PRESSURE MEASUREMENT INSTRUMENTATION OPTIONS & ACCESSORIES

Piston-Type Snubbers, Sintered Snubbers, Pigtail Steam Syphons, Swivel Adaptors	128-131
Reference Information	132-143
Frequently Asked Questions	144-146
Canadian Registration Numbers	147

ABS & Steel Case, Dry



100 SERIES

- General purpose non-fillable dry gauge
- Vacuum and compound ranges through 0 psi to 15,000 psi
- 1-1/2", 2", 2-1/2" and 4" gauge sizes
- Standard impact-resistant ABS & Steel case
- Copper alloy and Brass wetted parts

OPERATING SPECIFICATIONS

1. Working Pressure Limitations

a. Dynamic Pressure

The working pressure should be limited to 60% of the dial range.

b. Static Pressure

The working pressure, where no sharp fluctuations occur, should be limited to 90% of the dial range

APPLICATIONS

- Hydraulics & pneumatics
- Medical
- Pumps & compressors
- Refrigeration controls
- Utilities
- Water management

	SERIES	SPECIFICATIONS
Pressure ranges	100 Series (all)	Vacuum and compound ranges through 0 psi to 15,000 psi
Accuracy	15-100, 15-110, 15-120, 20-100, 20-110, 20-120, 20-148, 25-100, 25-110, 25-120	±2.5% full scale
	40-100	±1.6% full scale
Temperature ranges*	100 Series (all)	Media -4 °F to 140 °F (-20 °C to 60 °C) Ambient -40 °F to 140 °F (-40 °C to 60 °C)
Measuring element	100 Series (all)	Copper alloy Bourdon tube
Connection	15-100, 15-110, 15-120, 20-100, 20-110	1/8" NPT, Brass
	20-148	1/8" NPT/10-32 Female, Brass
	20-100, 20-110, 20-120, 25-100, 25-110, 25-120, 40-100	1/4" NPT Brass SAE J1926-3:7/16-20
Case	15-100, 15-110, 20-100, 20-110, 20-148, 25-100, 40-100	ABS (Acryl Nitril Butadien Styrol)
	15-120, 20-120, 25-120	Black painted Steel with chrome triangular bezel and U-clamp
Bezel	15-110, 20-110, 25-110	Built-in bezel, molded as an integral part of the case for ease of panel mounting.
	15-120, 20-120, 25-120	Chrome-plated Steel triangular bezel
Lens	100 Series (all)	Acrylic
Pointer	100 Series (all)	Molded plastic
Dial	100 Series (all)	White background with black primary scale & red secondary scale. UV resistant.
Movement	100 Series (all)	Brass & nylon, or all-Brass with highly polished bearing surfaces

* For every 18 °F (10 °C) shift in temperature from which the gauge is calibrated, the user can experience up to ±0.4% additional error.

For details on accuracy/standard dial configuration and dial layouts, see pages 56-61.



ORDERING INFORMATION								
GAUGE SIZES	15	1-1/2"	20	2"	25	2-1/2"	40	4"
CASE TYPES	100	ABS, bottom connection		120	Steel case panel mount			
	110	ABS, back connection		148	Square ABS, panel mount (2" only)			
PRESSURE RANGES	30vac	-30 inHg vacuum to 0 psi		30/300	-30 inHg to 0 to 300 psi		200	0 psi to 200 psi
	30/15	-30 inHg to 0 to 15 psi		15	0 psi to 15 psi		300	0 psi to 300 psi
	30/30	-30 inHg to 0 to 30 psi		30	0 psi to 30 psi		400	0 psi to 400 psi
	30/60	-30 inHg to 0 to 60 psi		60	0 psi to 60 psi		600	0 psi to 600 psi
	30/100	-30 inHg to 0 to 100 psi		100	0 psi to 100 psi		1000	0 psi to 1,000 psi
	30/160	-30 inHg to 0 to 160 psi		160	0 psi to 160 psi		1500	0 psi to 1,500 psi
	30/200	-30 inHg to 0 to 200 psi						
Other ranges available on request								
SCALE OPTIONS***	psi	psi single scale		psi/kPa	psi/kPa dual scale		psi/kg/cm ²	psi/kg/cm ² dual scale
							psi/bar	psi/bar dual scale
CONNECTION SIZES	1/8	1/8" NPT		SST	SAE J1926-3/7/16-20 Adjustable		1/4	1/4" NPT
OPTIONS	PMC	Panel Mount Clamp		SSC	Stainless Steel Case		LL	Polycarbonate Lens
	SSB	Polished Stainless Steel Bezel		CRC	Chrome Case		GL	Glass Lens*
	BLRF	Black Rear Flange		FAC	Flat Sided ABS Case		SG	Safety Glass Lens*
	BLFF	Black Front Flange – ABS Case		BCR	Black Cover Ring**		HL	Homalite Lens*
	CFF	Chrome Front Flange – ABS Case		SSCR	Stainless Steel Cover Ring**		SP	Red Set Pointer**
	SBFF	Black Front Flange – Steel Case		CCR	Chrome Cover Ring**		MIP	Maximum Indicating Pointer
	SCFF	Chrome Front Flange – Steel Case		PCCR	Polished Chrome Cover Ring**		SDM	Silicone Dampened Movement
	BSC	Black Steel Case		CAR	Chrome Adapter Ring*		LM	Laser Marking
							ST	Stainless Steel Tagging
							CPO	Brass Sintered Orifice 20 Micron
							BP1	Brass Press Fit Orifice 0.1 mm
							BP3	Brass Press Fit Orifice 0.3 mm
							BP8	Brass Press Fit Orifice 0.8 mm

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

NOTE: Refer to 100 Series options & accessories chart on page 50 for availability by part number.


- * A Steel, Stainless or chrome case & cover ring must be additionally ordered when lenses other than acrylic are utilized on all 100 Series.
 ** Only 110 Series require a Steel, Stainless or chrome case & cover ring to be additionally ordered when utilizing a set pointer or cover ring.
 Please consult factory when a set pointer is to be utilized on a 120 Series.
 *** Other scales available on request

EXAMPLE


20 - 110 - 100 - psi - 1/4 - BSC

Gauge size2".....
 Case typeABS, back connection.....
 Pressure range & scale option0 psi to 100 psi.....
 Connection size.....1/4" NPT.....
 Option.....Black Steel Case.....


15-100

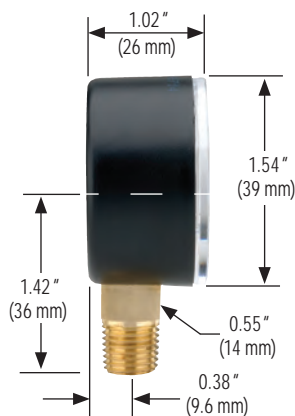

20-100

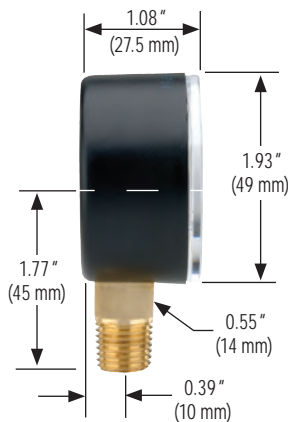


25-100

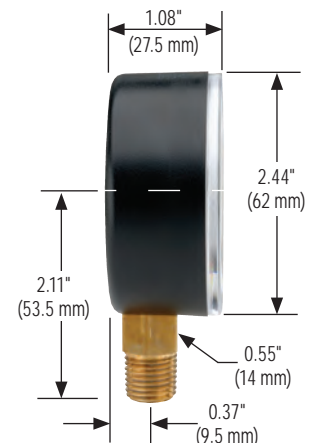


Dial Indicating Pressure Gauges

Dimensions


40-100

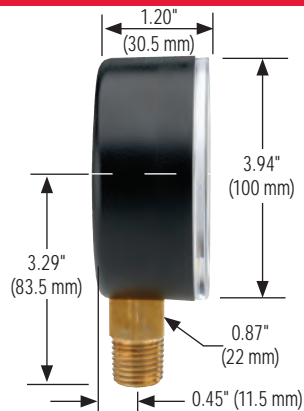


15-110

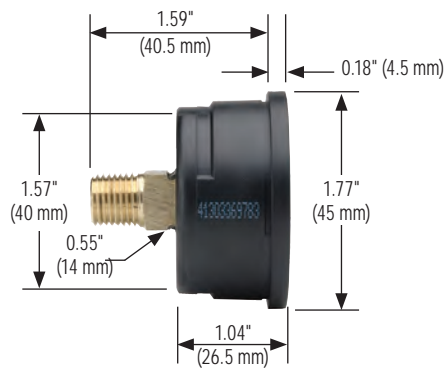


20-110

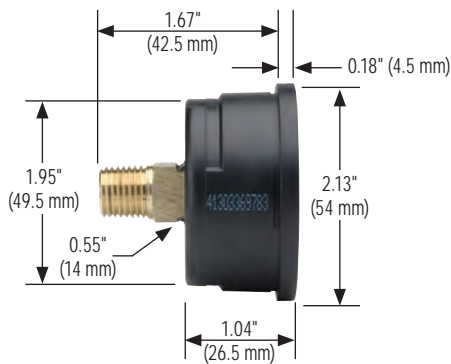


20-148

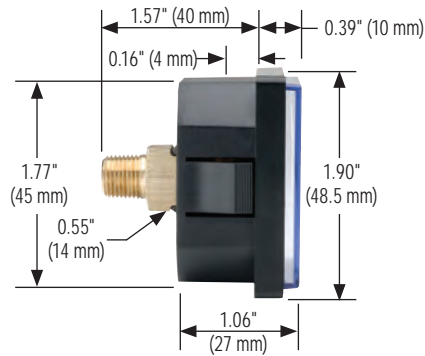


25-110

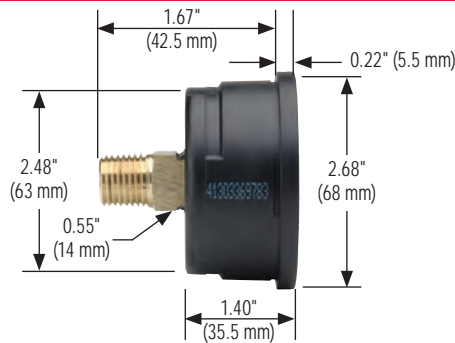


15-110 Front Flange

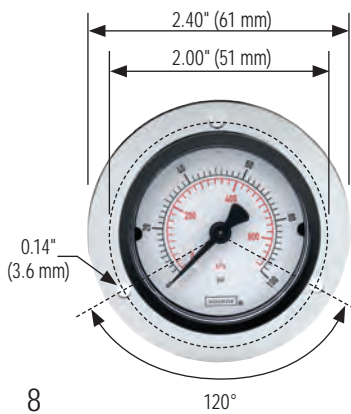


20-110 Front Flange

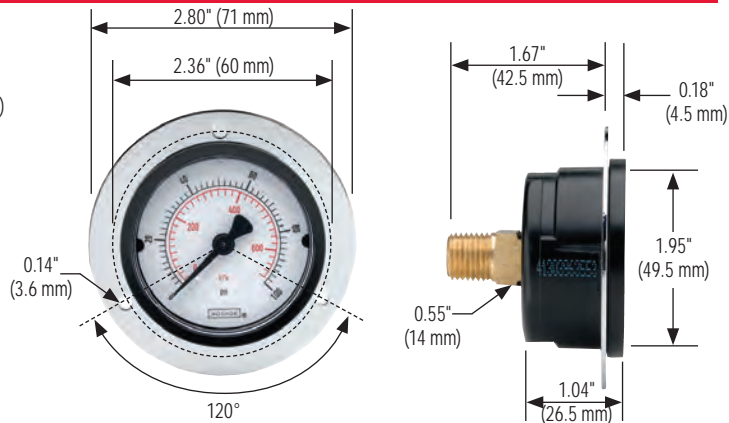


25-110 Front Flange

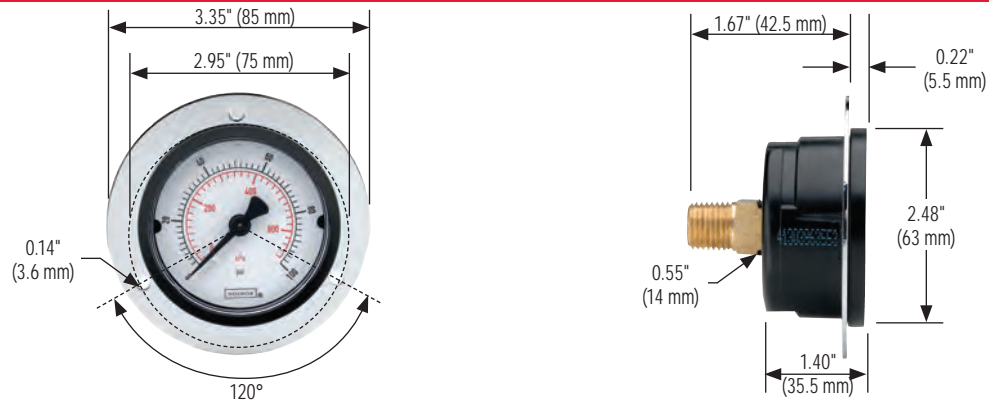


25-100 Rear Flange

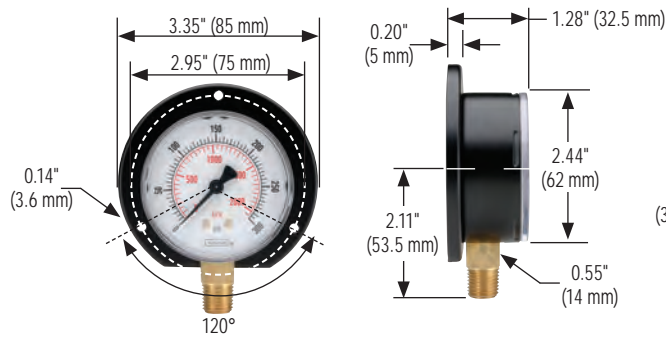


40-100 Rear Flange

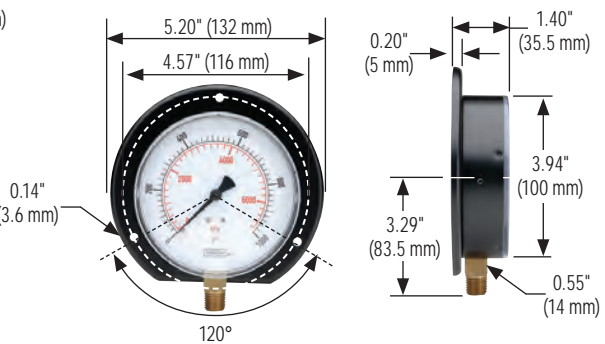


15-120 Chrome Bezel With U-Clamp

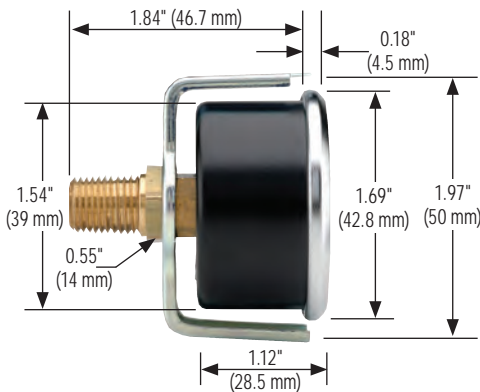


20-120 Chrome Bezel With U-Clamp

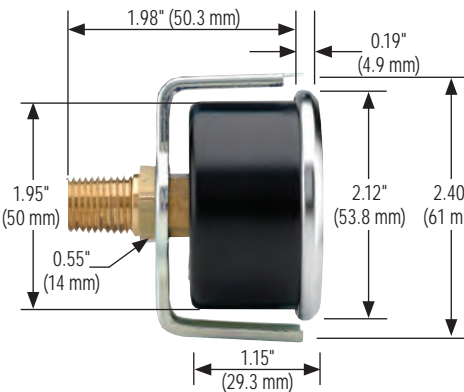


25-120 Chrome Bezel With U-Clamp

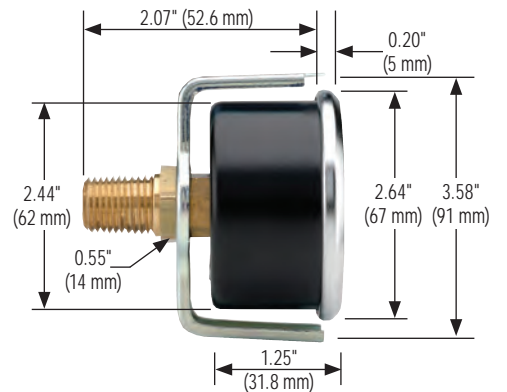


15-110 Panel Mount Clamp

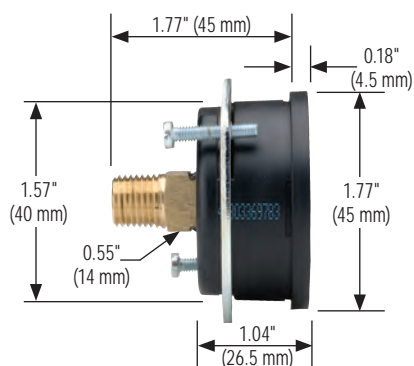

20-110 Panel Mount Clamp

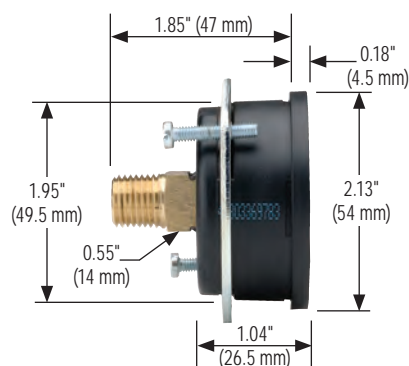

25-110 Panel Mount Clamp

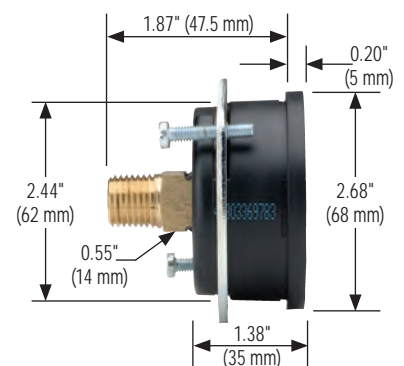

Low Pressure Diaphragm



200 SERIES

- Sensitive capsule-type, non-fillable dry gauge
- Vacuum ranges through 0 psi to 10 psi
- 2-1/2" and 4" gauge sizes
- Black painted Steel, Stainless Steel and impact-resistant ABS case
- Copper alloy and Brass wetted parts

OPERATING SPECIFICATIONS

1. Working Pressure Limitations

a. Dynamic Pressure

The working pressure should be limited to 60% of the dial range.

b. Static Pressure

The working pressure, where no sharp fluctuations occur, should be limited to 90% of the dial range

APPLICATIONS

- Filter monitoring
- Gas distribution
- HVAC
- Leak detection
- Level indication
- Medical

	SERIES	SPECIFICATIONS
Pressure ranges	200 Series (all)	Extreme low pressure vacuum ranges through 0 psi to 10 psi
Accuracy	25-200, 25-210, 25-224	±1.6% full scale
	25-206, 25-216	±2.5% full scale
	40-200	±1.6% full scale
Temperature ranges*	200 Series (all)	Media -4 °F to 176 °F (-20 °C to 80 °C) Ambient -4 °F to 140 °F (-20 °C to 60 °C)
Measuring element	25-200, 25-210, 25-224, 40-200	Copper alloy diaphragm capsule
Connection	200 Series (all)	1/4" NPT, Brass
Case	25-200, 25-210	Black painted Steel
	25-206, 25-216, 25-224	Black ABS (Acryl Nitril Butadien Styrol) with 25-224 includes zinc-plated Steel panel mount clamp
	40-200	304 Stainless Steel
Bezel	40-200	304 Stainless Steel
Lens	25-200, 25-206, 25-210, 25-216, 25-224	Acrylic
	40-200	Instrument glass
Pointer	200 Series (all)	Black finished Aluminum
Dial	200 Series (all)	Aluminum, white background with black scale. UV resistant.
Movement	25-200, 25-210, 25-224, 40-200	Brass and Nickel-silver with highly polished bearing surfaces
	25-206, 25-216	Cu-Alloy

* For every 18 °F (10 °C) shift in temperature from which the gauge is calibrated, the user can experience up to ±0.4% additional error.

For details on accuracy/standard dial configuration and dial layouts, see pages 56-61.



WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

ORDERING INFORMATION									
GAUGE SIZES		25 2-1/2"		40 4"					
CASE TYPES		200 Steel, bottom connection (304SS for 4")				224 ABS, panel mount			
		210 Steel, back connection				234 Gas pressure test kit**			
PRESSURE RANGES	15 inH ₂ O Vac	-15 inH ₂ O to 0 inH ₂ O	100 inH ₂ O	0 inH ₂ O to 100 inH ₂ O	100 oz/in ²	0 oz/in ² to 100 oz/in ²	60 mbar	0 mbar to 60 mbar	
	30 inH ₂ O Vac	-30 inH ₂ O to 0 inH ₂ O	160 inH ₂ O	0 inH ₂ O to 160 inH ₂ O	160 oz/in ²	0 oz/in ² to 160 oz/in ²	100 mbar	0 mbar to 100 mbar	
	60 inH ₂ O Vac	-60 inH ₂ O to 0 inH ₂ O	200 inH ₂ O	0 inH ₂ O to 200 inH ₂ O	20 oz/ in ² /inH ₂ O	0 oz/in ² /inH ₂ O to 20 oz/in ² /inH ₂ O	160 mbar	0 mbar to 160 mbar	
	100 inH ₂ O Vac	-100 inH ₂ O to 0 inH ₂ O	10 oz/in ²	0 oz/in ² to 10 oz/in ²	32 oz/ in ² /inH ₂ O	0 oz/in ² /inH ₂ O to 32 oz/in ² /inH ₂ O	250 mbar	0 mbar to 250 mbar	
	10 inH ₂ O	0 inH ₂ O to 10 inH ₂ O	15 oz/in ²	0 oz/in ² to 15 oz/in ²	3 psi	0 psi to 3 psi	400 mbar	0 mbar to 400 mbar	
	15 inH ₂ O	0 inH ₂ O to 15 inH ₂ O	30 oz/in ²	0 oz/in ² to 30 oz/in ²	5 psi	0 psi to 5 psi	600 mbar	0 mbar to 600 mbar	
	30 inH ₂ O	0 inH ₂ O to 30 inH ₂ O	35 oz/in ²	0 oz/in ² to 35 oz/in ²	10 psi	0 psi to 10 psi			
	60 inH ₂ O	0 inH ₂ O to 60 inH ₂ O	60 oz/in ²	0 oz/in ² to 60 oz/in ²	40 mbar	0 mbar to 40 mbar			
CONNECTION SIZE		1/4 1/4" NPT							
OPTIONS	BLRF	Black Rear Flange	GL	Glass Lens*	OP	Over Pressure Protection	LM	Laser Marking	
	SSRF	304SS Rear Flange	SG	Safety Glass Lens*	SSBU	Stainless Steel Bezel & U-Clamp	ST	Stainless Steel Tagging	
	BLFF	Black Front Flange***	PL	Acrylic Lens	BBU	Black Bezel & U-Clamp	BP3	Brass Press Fit Orifice 0.3 mm	
	SSFF	304SS Front Flange	RL	Recalibrator Lens	BCR	Black Cover Ring	BT3	Brass Threaded Orifice 0.3 mm	
	CFF	Chrome Front Flange***	SP	Red Set Pointer	SSCR	Stainless Steel Cover Ring			
	SSC	Stainless Steel Case	MIP	Maximum Indicating Pointer					

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

NOTES: Refer to 200 Series Options & Accessories chart on page 51 for availability by part number.

O2 cleaning is not available for 200 Series gauges.

* A Steel, Stainless or chrome cover ring must be additionally ordered when lenses other than acrylic are utilized on all 200 Series

** Only available in 2-1/2" size, 20 oz/35 inH₂O

*** Not available on 25-200 model

EXAMPLE

25 - 200 - 30 - inH₂O - 1/4 - BP3

Gauge size 2-1/2"


Case type Steel, bottom connection

Pressure range & scale option 0 inH₂O to 30 inH₂O


Connection size 1/4" NPT

Option Brass Press Fit Orifice 0.3 mm


25-200

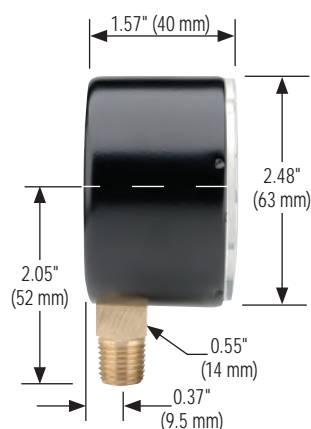

40-200

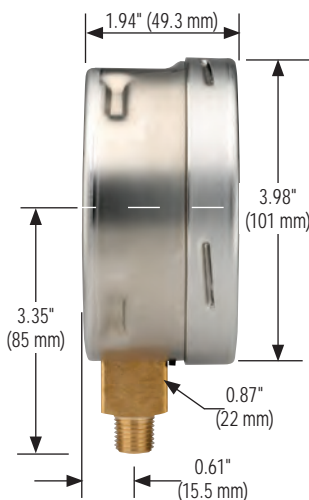


25-210

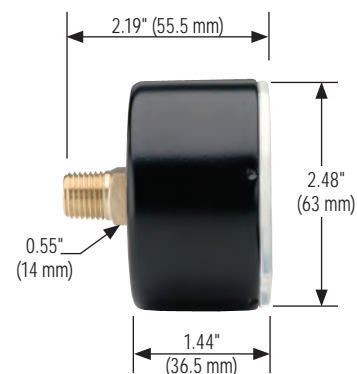


Dial Indicating Pressure Gauges

Dimensions


25-210 Front Flange

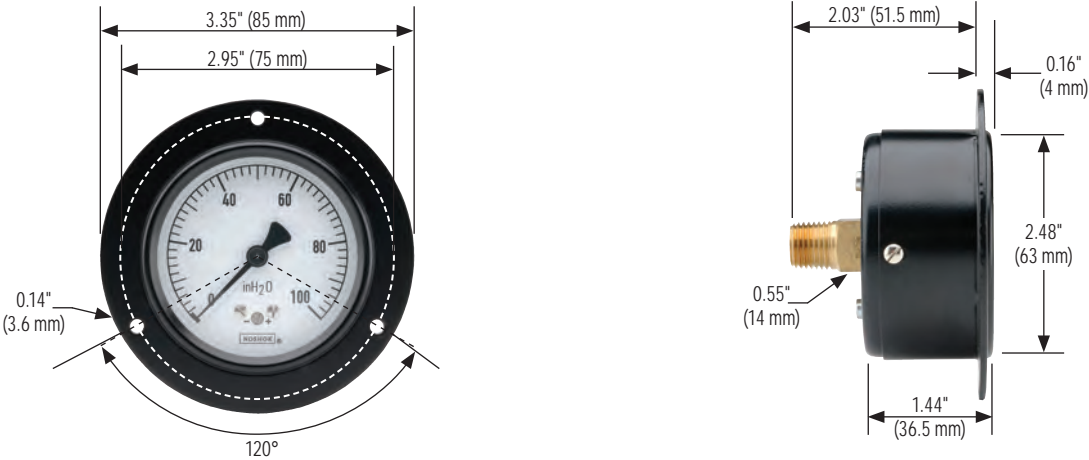


25-200 Rear Flange

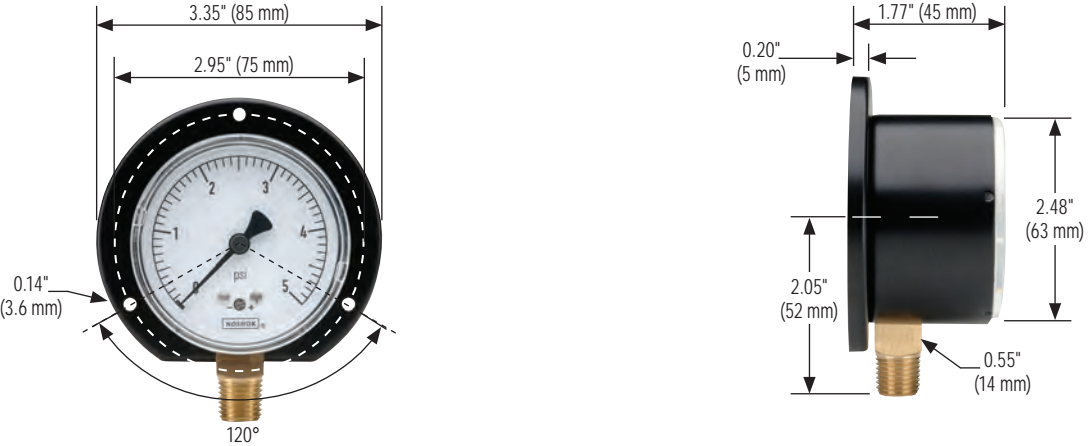


40-200 Rear Flange

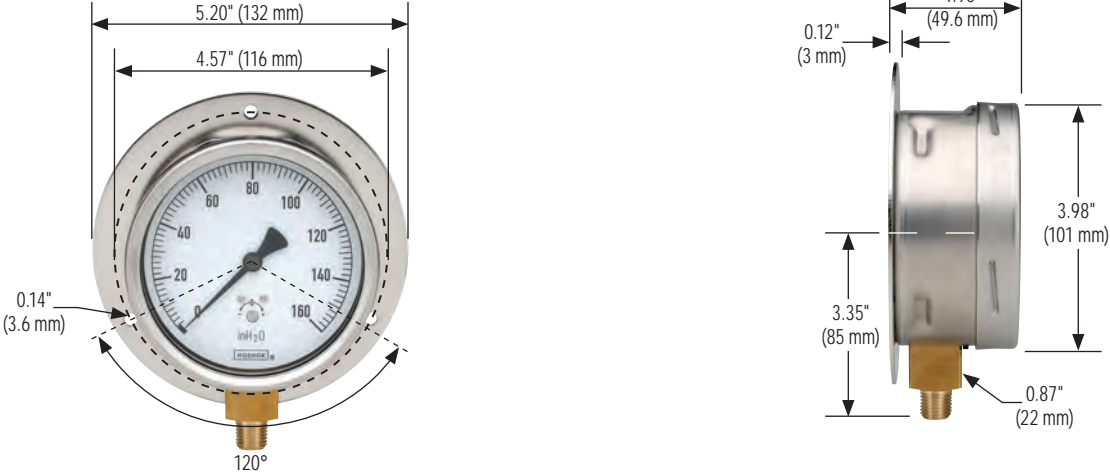


25-210 Triangular Bezel w/U-Clamp

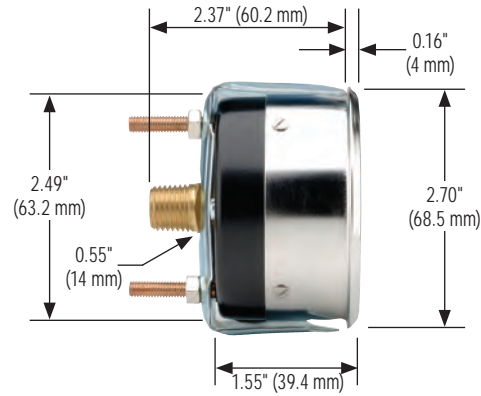

25-224 with Panel Mount Clamp

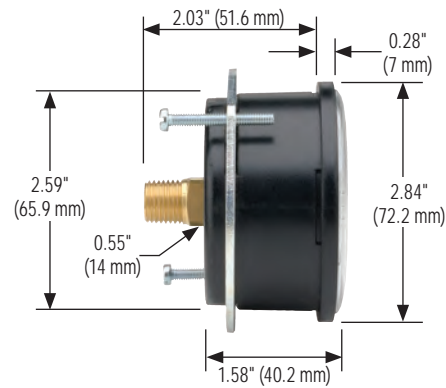

25-234

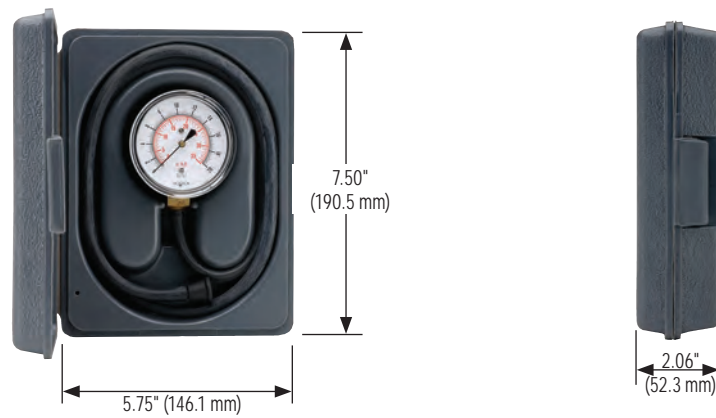

Brass Case, Liquid Filled



300 SERIES

- High quality, heavy-duty liquid filled gauge
- Vacuum and compound ranges through 0 psi to 15,000 psi
- 2-1/2" and 4" gauge sizes
- Die cast Brass case with natural Brass finish
- Copper alloy or 316 Stainless Steel and Brass wetted parts

OPERATING SPECIFICATIONS

1. Working Pressure Limitations

a. Dynamic Pressure

The working pressure should be limited to 60% of the dial range.

b. Static Pressure

The working pressure, where no sharp fluctuations occur, should be limited to 90% of the dial range.

APPLICATIONS

- Automotive
- Construction
- Hydraulics & pneumatics
- Mining
- Stamping & forming presses
- Transportation

	SERIES	SPECIFICATIONS
Pressure ranges	300 Series (all)	Vacuum and compound ranges through 0 psi to 15,000 psi
Accuracy	25-300, 25-310	±1.6% full scale
	40-300, 40-310	± 1% full scale
Temperature ranges*	300 Series (all)	Media -4 °F to 140 °F (-20 °C to 60 °C) Ambient 0 °F to 160 °F (-18 °C to 71 °C) Optional temperature ratings available from -40 °F to 212 °F (-40 °C to 100 °C)
Measuring element	25-300, 25-310 (≤ 600 psi)	Copper alloy °C °tube
	25-300, 25-310 (800 psi to 6,000 psi)	Copper alloy coiled safety tube
	25-300, 25-310 (7,500 psi to 15,000 psi)	316 Stainless Steel coiled safety tube
	40-300, 40-310 (≤ 1,000 psi)	Copper alloy °C °tube
	40-300, 40-310 (15,000 psi)	316 Stainless Steel coiled safety tube
Connection	25-300, 25-310	1/4" NPT die-cast Brass with the case. 7/16" – 20 SAE adjustable type straight thread with FKM O-ring is also available as a stock option on many ranges (-4 SAE).
	40-300, 40-310	1/4" NPT die-cast Brass with the case. 1/2" NPT is available on certain 40-300 ranges as a stock option, and on all other 40-300 and 40-310's as a non-stock option.
Case	300 Series (all)	Die cast Brass (natural Brass finish) with safety relief plug
Cover ring	300 Series (all)	Polished Brass
Lens	300 Series (all)	Acrylic with o-ring seal
Pointer	300 Series (all)	Balanced Aluminum, black finish
Dial	300 Series (all)	Aluminum, white background with black scale. UV resistant.
Movement	300 Series (all)	Brass and Nickel-silver with highly polished bearing surfaces
Fill liquid**	300 Series (all)	Glycerin

* For every 18 °F (10 °C) shift in temperature from which the gauge is calibrated, the user can experience up to ±0.4% additional error.

**See page 51 for gauge fill options.

For details on accuracy/standard dial configuration and dial layouts, see pages 56-61.



WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

ORDERING INFORMATION								
GAUGE SIZES	25	2-1/2"	40	4"				
CASE TYPES	300	Brass, bottom connection	310	Brass, back connection				
PRESSURE RANGES	30vac	-30 inHg to 0 psi	30/300	-30 inHg to 0 to 300 psi	300	0 psi to 300 psi	3000	0 psi to 3,000 psi
	30/15	-30 inHg to 0 to 15 psi	15	0 psi to 15 psi	400	0 psi to 400 psi	5000	0 psi to 5,000 psi
	30/30	-30 inHg to 0 to 30 psi	30	0 psi to 30 psi	600	0 psi to 600 psi	6000	0 psi to 6,000 psi
	30/60	-30 inHg to 0 to 60 psi	60	0 psi to 60 psi	800	0 psi to 800 psi	7500	0 psi to 7,500 psi
	30/100	-30 inHg to 0 to 100 psi	100	0 psi to 100 psi	1000	0 psi to 1,000 psi	10000	0 psi to 10,000 psi
	30/160	-30 inHg to 0 to 160 psi	160	0 psi to 160 psi	1500	0 psi to 1,500 psi	15000	0 psi to 15,000 psi
	30/200	-30 inHg to 0 to 200 psi	200	0 psi to 200 psi	2000	0 psi to 2,000 psi		
SCALE OPTIONS	psi	psi single scale	psi/kPa	psi/kPa dual scale	psi/kg/cm²	psi/kg/cm² dual scale	psi/bar	psi/bar dual scale
CONNECTION SIZES	1/4	1/4" NPT	1/2	1/2" NPT	SST	SAE J1926-3:7/16-20 Adjustable		
OPTIONS	CFF	Chrome Front Flange	RF	Rear Flange	GLO	Glass Lens Overlay	ST	Stainless Steel Tagging
	CFFN	Chrome Front Flange w/o holes	CCR	Chrome Cover Ring	SGO	Safety Glass Overlay	BT3	Brass Threaded Orifice 0.3 mm
	BFF	Brass Front Flange	CBU	Chrome Bezel & U-Clamp	AR	Adapter Ring	BT4	Brass Threaded Orifice 0.4 mm
	BLFF	Black Front Flange	MIP	Maximum Indicating Pointer	LM	Laser Marking	BT8	Brass Threaded Orifice 0.8 mm
	SSRF	304SS Rear Flange	LL	Polycarbonate Lens				

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

NOTE: Refer to 300 Series Options & Accessories chart on page 51 for availability by part number.

EXAMPLE

40 - 300 - 3000 - psi - 1/4 - BT3

Gauge size4"


Case type Brass, bottom connection

Pressure range & scale option0 psi to 3,000 psi


Connection size..... 1/4" NPT

Option.....Brass Threaded Orifice 0.3 mm


25-300

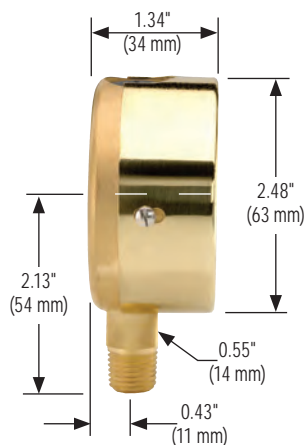

40-300

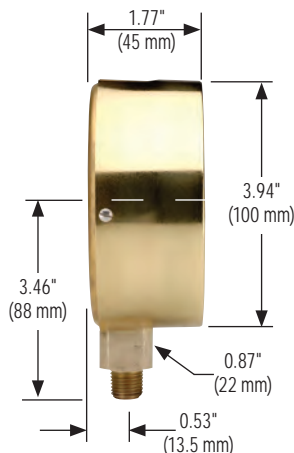


25-310

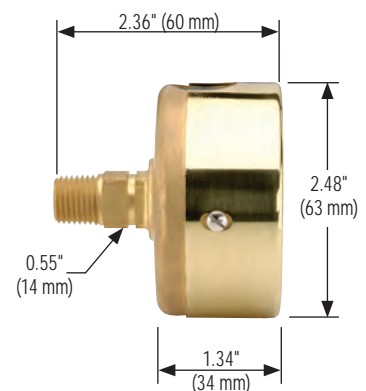


Dimensions


40-310

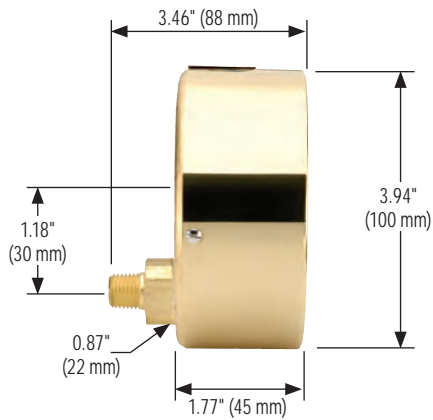


25-300 Front Flange

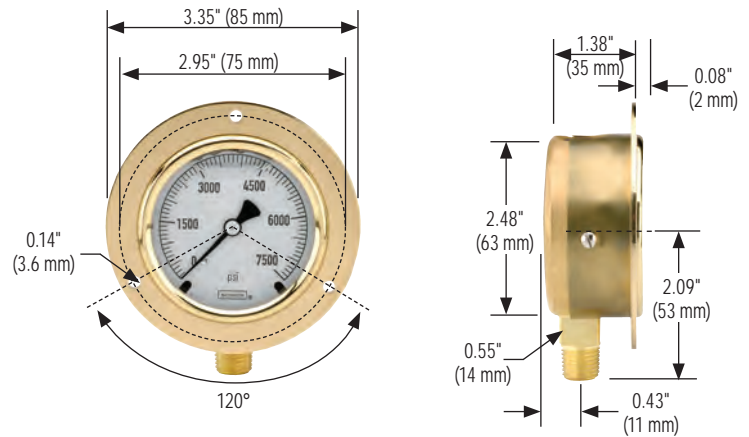


40-300 Front Flange

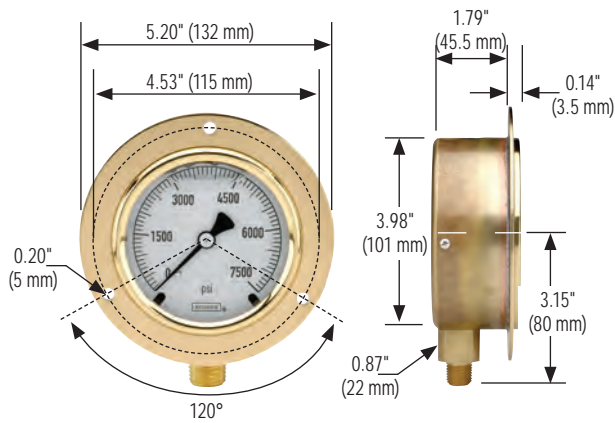


25-310 Front Flange

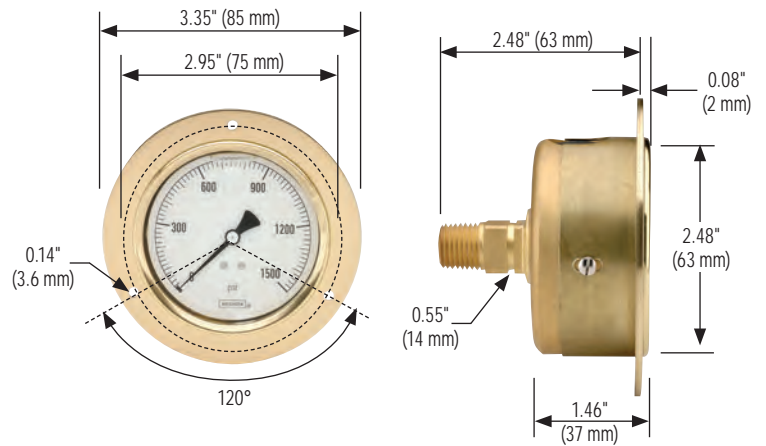


40-310 Front Flange

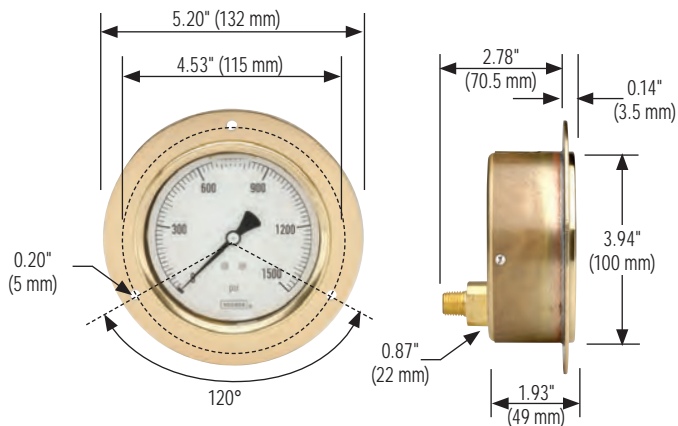


25-300 Rear Flange

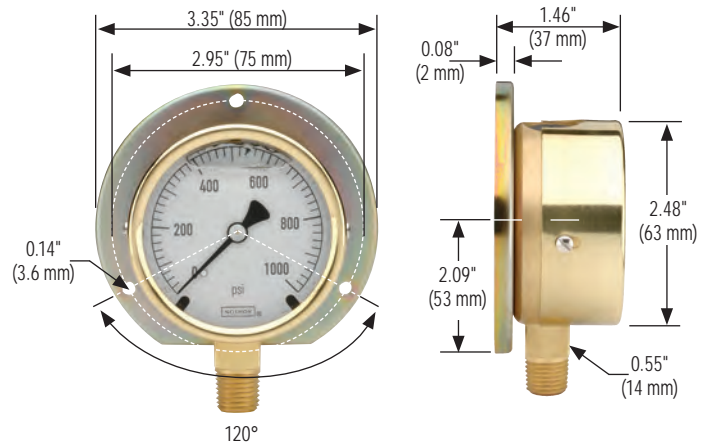



40-300 Rear Flange

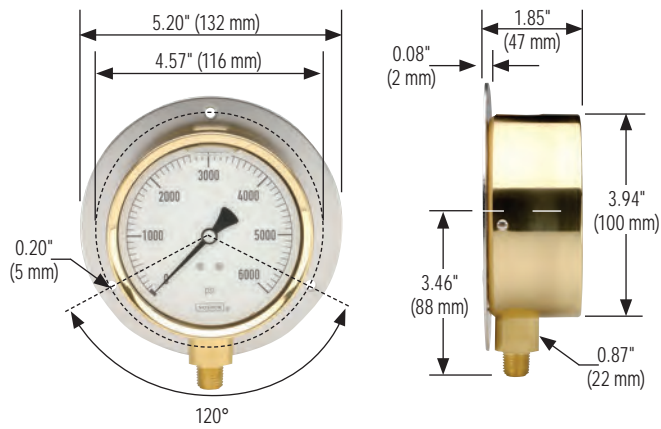


25-310 Rear Flange

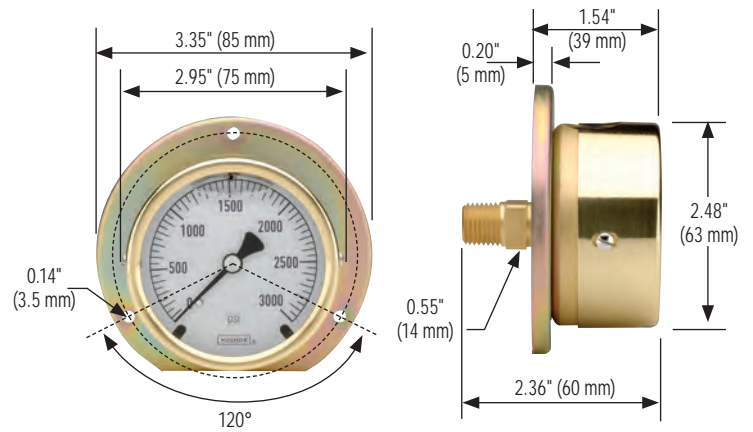


40-310 Rear Flange

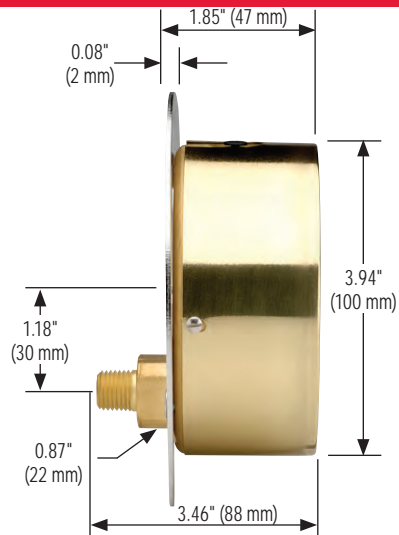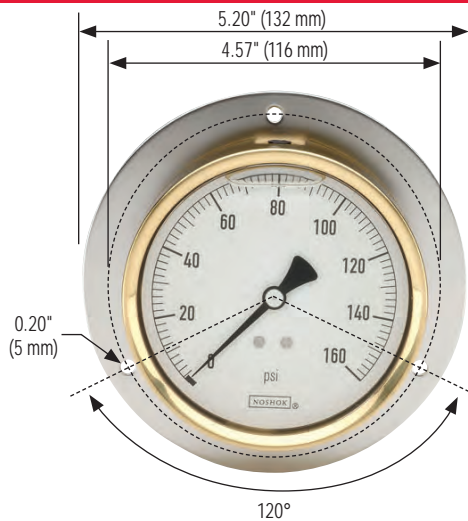

25-310 Chrome Triangular Bezel with U-Clamp

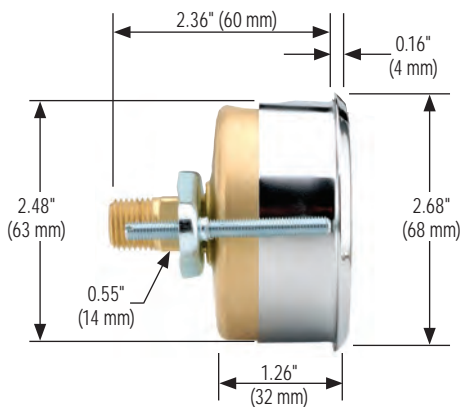

40-310 Chrome Triangular Bezel with U-Clamp

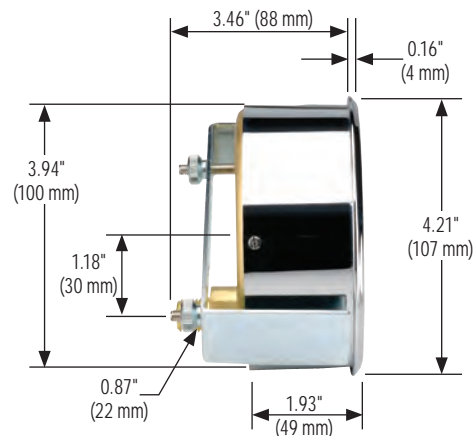

All Stainless Steel, Dry & Liquid Filled



400/500 SERIES

- Corrosion-resistant fillable dry or liquid-filled gauge
- Vacuum and compound ranges through 0 psi to 20,000 psi
- 1-1/2", 2-1/2", 4 and 6" gauge sizes
- Stainless Steel case
- 316 Stainless Steel wetted parts
- ECE-R110 Certification for CNG/LNG Pressure Gauge Component (Part number 25-410-300-psi/bar only)

OPERATING SPECIFICATIONS

1. Working Pressure Limitations

a. Dynamic Pressure

The working pressure should be limited to 60% of the dial range.

b. Static Pressure

The working pressure, where no sharp fluctuations occur, should be limited to:
 ≤15,000 psi: 90% of the dial range
 >15,000 psi: 75% of the dial range

APPLICATIONS

- Chemical processing
- Oil field & offshore
- Paper mills
- Agriculture plants
- Marine
- Water & wastewater

* For every 18 °F (10 °C) shift in temperature from which the gauge is calibrated, the user can experience up to ±0.4% additional error.

** See page 51 for gauge fill options.

For details on accuracy/standard dial configuration and dial layouts, see pages 56-61.

	SERIES	SPECIFICATIONS
Pressure ranges	400/500 Series (all)	Vacuum and compound ranges through 0 psi to 20,000 psi
Accuracy	15-401, 15-411	±2.5% full scale
	25-400, 25-410, 25-500, 25-510	±1.6% full scale
	40-400, 40-410, 40-500, 40-510, 60-400, 60-410, 60-500, 60-510	±1% full scale
Temperature ranges*	15-401, 15-411	Media -40 °F to 212 °F (-40 °C to 100 °C) Ambient -40 °F to 140 °F (-40 °C to 60 °C)
	25-400, 25-410, 40-400, 40-410, 60-400, 60-410	Media -40 °F to 392 °F (-40 °C to 200 °C) Ambient -40 °F to 140 °F (-40 °C to 60 °C)
	500 Series (all)	Media -4 °F to 212 °F (-20 °C to 100 °C) Glycerin fill -40 °F to 212 °F (-40 °C to 100 °C) Special fill Ambient -4 °F to 140 °F (-20 °C to 60 °C) Glycerin fill -40 °F to 140 °F (-40 °C to 60 °C) Special fill
Measuring element	15-401, 15-411, 25-400, 25-410, 25-500, 25-510, 40-400, 40-410, 40-500, 40-510, 60-400, 60-410, 60-500, 60-510 (up to 600 psi)	316 Stainless Steel C-Type Bourdon tube
	25-400, 25-410, 25-500, 25-510, 40-400, 40-410, 40-500, 40-510, 60-400, 60-410, 60-500, 60-510 (greater than 600 psi)	Coiled safety tube
Connection	15-401, 15-411	1/8" NPT, 316 Stainless Steel
	25-400, 25-410, 25-500, 25-510	1/4" NPT, 316 Stainless Steel
Case	40-400, 40-410, 40-500, 40-510, 60-400, 60-410, 60-500, 60-510	1/2" NPT, 316 Stainless Steel. 9/16" - 18 high pressure connections are standard on 0 - 30,000 psi and higher
	15-401, 15-411, 40-400, 40-410, 60-400, 60-410, 60-500, 60-510	304 Stainless Steel with safety relief plug
Cover ring	25-400, 25-410, 25-500, 25-510, 40-500, 40-510	Polished 304 Stainless Steel with safety relief plug
	15-401, 15-411, 25-400, 25-410, 25-500, 25-510, 40-400, 40-410, 40-500, 40-510	Polished 304 Stainless Steel
Lens	60-400, 60-410, 60-500, 60-510	Polished 304 Stainless Steel bayonet ring
	15-401, 15-411, 40-400, 40-410, 40-500, 40-510	Instrument glass
	25-400, 25-410, 25-500, 25-510	Trogamide
Pointer	60-400, 60-410, 60-500, 60-510	Laminated safety glass
	115-401, 15-411	Black finished Aluminum
	25-400, 25-410, 25-500, 25-510, 40-400, 40-410, 40-500, 40-510	Balanced Aluminum, black finish
Dial	60-400, 60-410, 60-500, 60-510	Balanced micro-adjustable Aluminum, black finish
	15-401, 15-411	Aluminum, white background with black scale. Single scale psi. UV resistant
	25-400, 25-410, 25-500, 25-510, 40-400, 40-410, 40-500, 40-510, 60-400, 60-410, 60-500, 60-510	Aluminum, white background with black scale. UV resistant.
Movement	15-401, 15-411, 25-400, 25-410, 25-500, 25-510	Stainless Steel with highly polished bearing surfaces
	40-400, 40-410, 40-500, 40-510	All Stainless Steel with internal zero stop and highly polished bearing surfaces
	60-400, 60-410, 60-500, 60-510	Stainless Steel with highly polished bearing surfaces. An internal zero stop is standard
Fill liquid**	25-500, 25-510, 40-500, 40-510, 60-500, 60-510	Glycerin



WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

ORDERING INFORMATION									
GAUGE SIZE	15	1-1/2"	25	2-1/2"	40	4"	60	6"	
CASE TYPES	400	All SS, dry/fillable, bottom connection	410	All SS, dry/fillable, back connection	502	SS case, solid front, liquid filled, bottom connection			
	401	All SS, dry, bottom connection	411	All SS, dry, back connection					
	402	SS case, solid front, dry, bottom connection	500	SS case, liquid filled, bottom connection	510	SS case, liquid filled, back connection			
PRESSURE RANGES	30vac	-30 inHg to 0 psi ***	30	0 psi to 30 psi	1000	0 psi to 1,000 psi			
	30/15	-30 inHg to 0 psi to 15 psi ***	60	0 psi to 60 psi	1500	0 psi to 1,500 psi			
	30/30	-30 inHg to 0 psi to 30 psi ***	100	0 psi to 100 psi	2000	0 psi to 2,000 psi			
	30/60	-30 inHg to 0 psi to 60 psi ***	160	0 psi to 160 psi	3000	0 psi to 3,000 psi			
	30/100	-30 inHg to 0 psi to 100 psi ***	200	0 psi to 200 psi	5000	0 psi to 5,000 psi			
	30/160	-30 inHg to 0 psi to 160 psi ***	300	0 psi to 300 psi	6000	0 psi to 6,000 psi			
	30/200	-30 inHg to 0 psi to 200 psi ***	400	0 psi to 400 psi	10000	0 psi to 10,000 psi			
	30/300	-30 inHg to 0 psi to 300 psi ***	600	0 psi to 600 psi	15000	0 psi to 15,000 psi			
	15	0 psi to 15 psi	800	0 psi to 800 psi	20000	0 psi to 20,000 psi **			
SCALE OPTIONS	psi	psi single scale	psi/kg/cm ²	psi/kg/cm ² dual scale					
	psi/kPa	psi/kPa dual scale	psi/bar	psi/bar dual scale					
CONNECTION SIZES	1/8	1/8" NPT	1/2	1/2" NPT	SST	SAE J1926-3.7/16-20 Adjustable			
	1/4	1/4" NPT	9/16-18	9/16"-18 UNF 2B high pressure cone					
OPTIONS	SSFF	304SS Front Flange	SSFR	304SS Flange Ring	LM	Laser Marking			
	SSRF	304SS Rear Flange	AP	Adjustable Pointer	ST	Stainless Steel Tagging			
	SSBU	Stainless Steel Bezel & U-Clamp	SG	Safety Glass Lens	ST5	Stainless Steel Threaded Orifice 0.5 mm			
	SPMC	304SS Panel Mount Clamp	MIP	Maximum Indicating Pointer	ST8	Stainless Steel Threaded Orifice 0.8 mm			
	PMC	Steel Panel Mount Clamp	SP	Red Set Pointer					

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

NOTE: Refer to 400/500 Series options & Accessories chart on page 52 for availability by part number.

* On 40-400, 40-410, 40-500, 40-510, 60-400, 60-410, 60-500, and 60-510 models with 20,000 psi, the accuracy is ±1.5% or 1.6%

** 4" model only available with solid front case types

*** Ammonia gauges are available in these ranges. To order, add " - AMMONIA" at the end of the part number.

EXAMPLE

40 - 500 - 600 - psi - 1/2 - MIP

Gauge size4"


Case type SS case, liquid filled, bottom connection

Pressure range & scale option0 psi to 600 psi

Connection size..... 1/2" NPT

Option..... Maximum Indicating Pointer


15-401

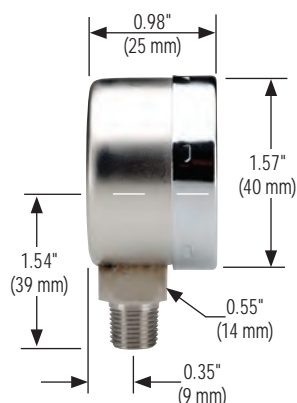

25-400/500




40-400/500

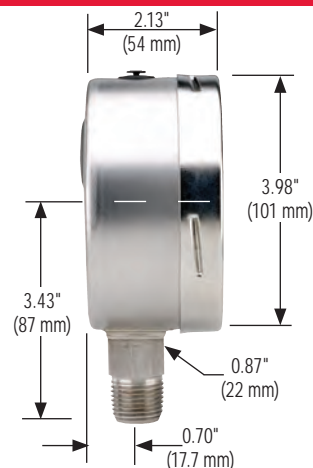


Dimensions


60-400/500

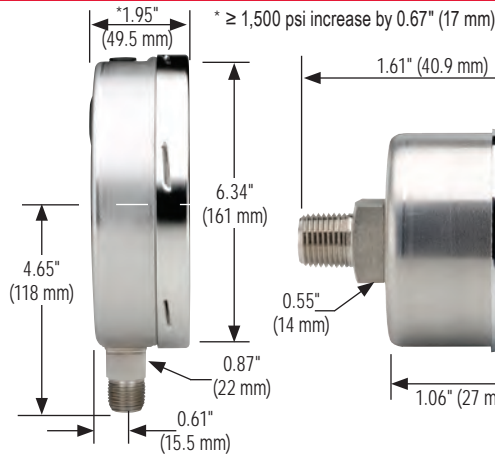


15-411

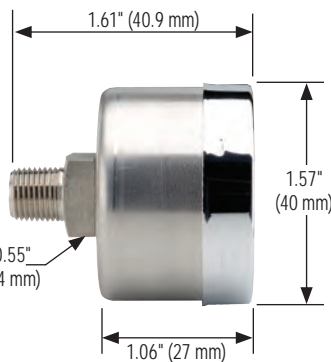


25-410/510

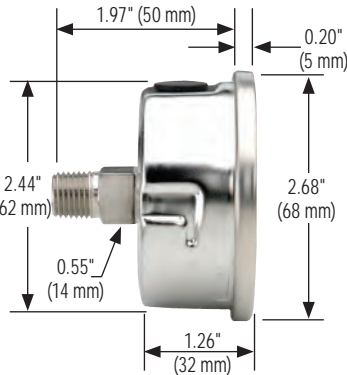


40-410/510

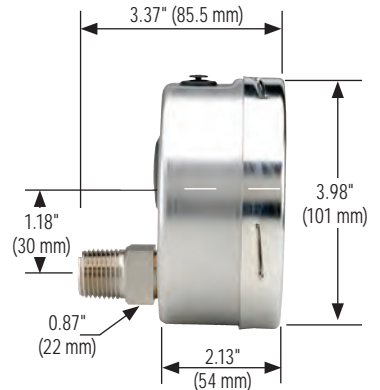



60-410/510

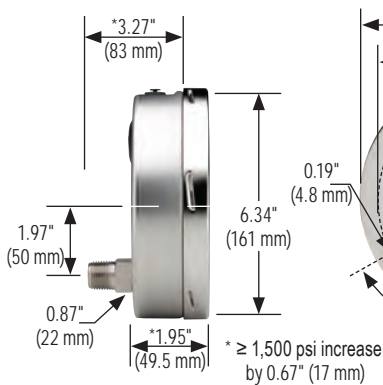


40-400/500 Front Flange

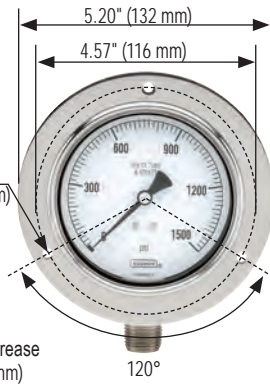




60-400/500 Front Flange

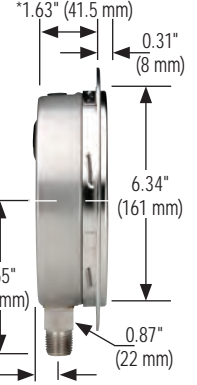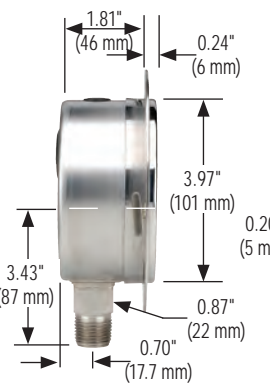


25-410/510 Front Flange






40-410/510 Front Flange

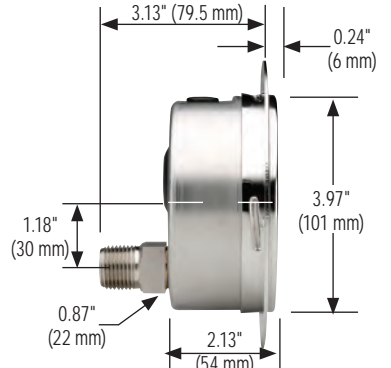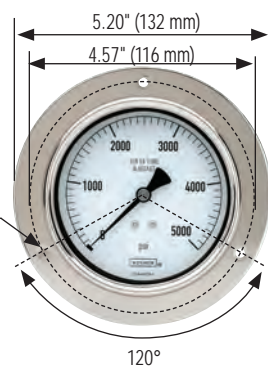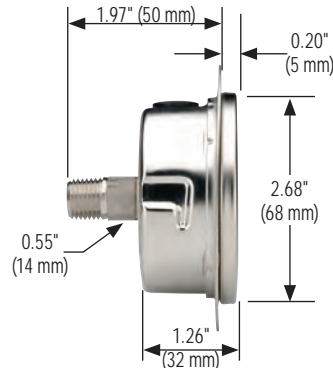


60-410/510 Front Flange

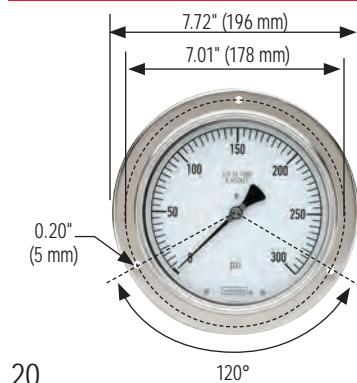


40-400/500 Rear Flange

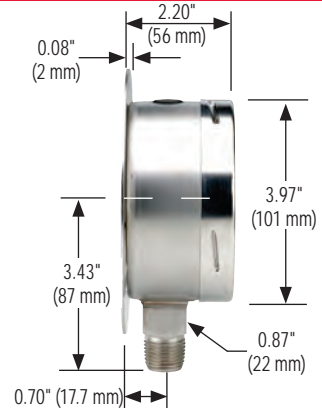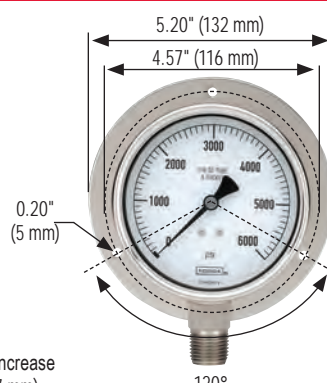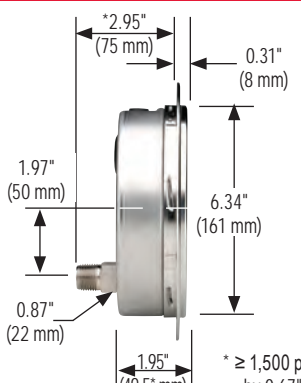


60-400/500 Rear Flange

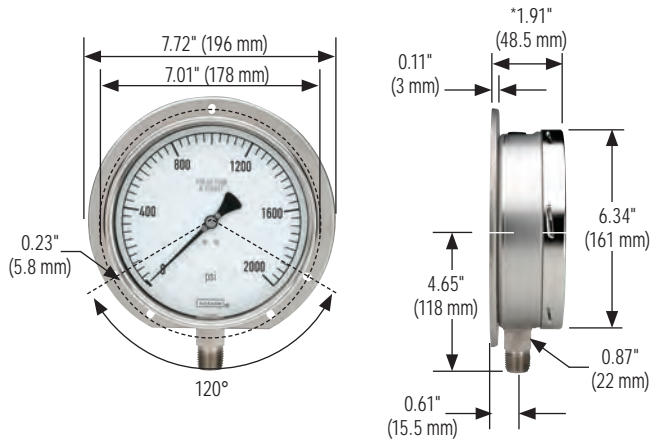


40-410/510 Rear Flange

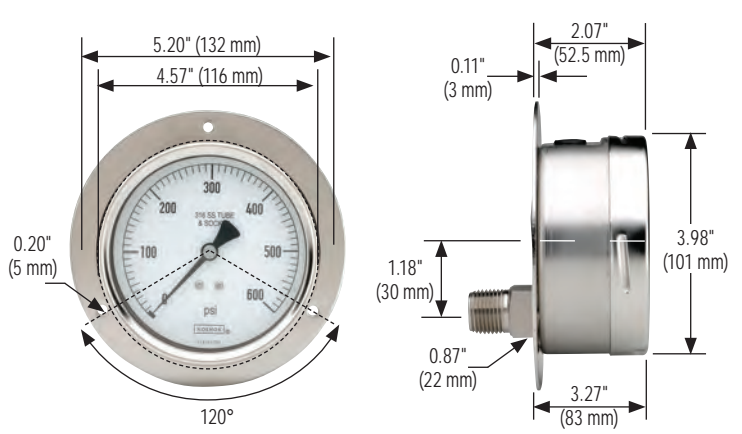


60-410/510 Rear Flange

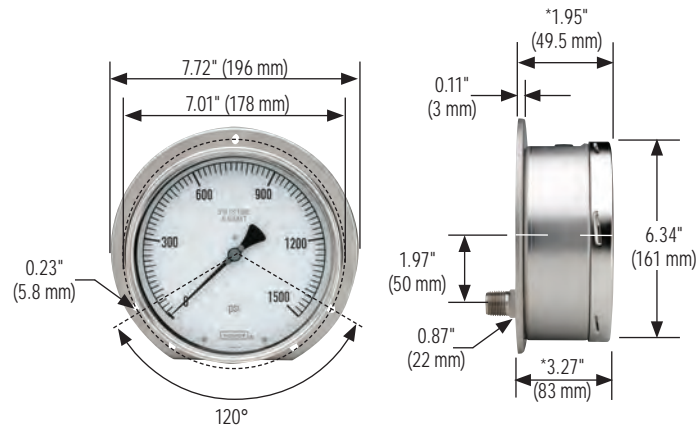


25-410/510 Flange Ring

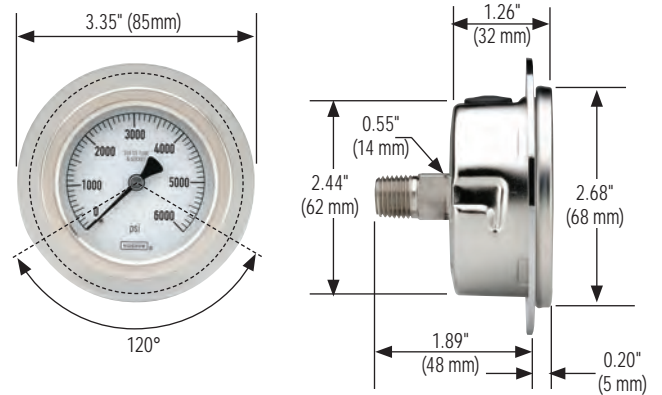


25-410/510 Panel Mount Clamp

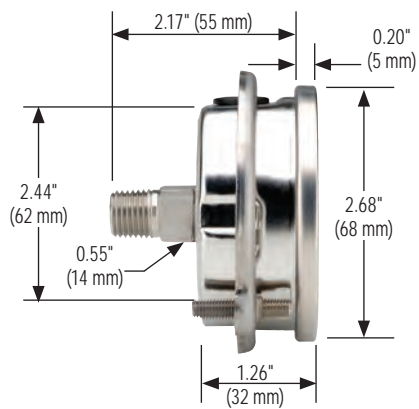

40-410/510 SS Narrow Bezel w/U-Clamp

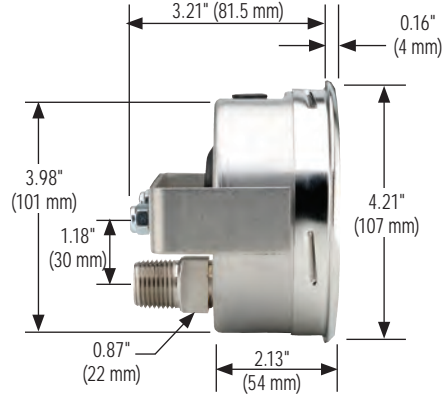

60-410/510 SS Narrow Bezel w/U-Clamp

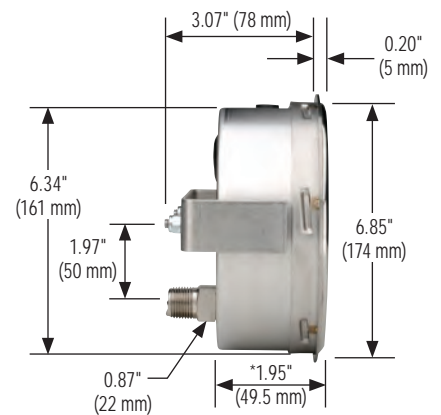

* Dimension will be 0.67" (17 mm) for pressure ranges above 1,500 psi.

All Stainless Steel, Dry & Liquid Filled, Extreme High Pressure



402/502 SERIES

- Corrosion-resistant dry or liquid-filled gauge for high pressure applications
- Ranges from 0 psi to 30,000 psi through 0 psi to 85,000 psi
- 4" and 6" gauge sizes
- Solid front design with a blow out back in accordance to EN 837, S3 Safety Pattern
- Stainless Steel case
- NiFe alloy/316L Stainless Steel wetted parts
- DIN 16001 compliant

OPERATING SPECIFICATIONS

1. Working Pressure Limitations

a. Dynamic Pressure

The working pressure should be limited to 65% of the dial range.

b. Static Pressure

The working pressure, where no sharp fluctuations occur, should be limited to 75% of the dial range

APPLICATIONS

- Pumps & compressors
- High pressure processing
- Test equipment & systems
- Water jet cutting

	SERIES	SPECIFICATIONS
Pressure ranges	402, 412 & 500 Series	0 psi to 30,000 psi through 0 psi to 85,000 psi
Accuracy	≤40,000 psi	±1.6% full scale (optional 1% increased accuracy)
	≥50,000 psi	±1% full scale (85,000 psi is ±1.6% accuracy)
Temperature ranges*	402 & 412 Series	Media -40 °F to 392 °F (-40 °C to 200 °C) Ambient -40 °F to 140 °F (-40 °C to 60 °C)
	502 Series	Media -4 °F to 212 °F (-20 °C to 100 °C) Glycerin fill Ambient -4 °F to 140 °F (-20 °C to 60 °C) Glycerin fill
Measuring element	402/502 Series (all)	NiFe alloy
Connection	402/502 Series (all)	316L Stainless Steel
Case	402/502 Series (all)	Stainless Steel, solid front with blowout back
Cover ring	402/502 Series (all)	Stainless Steel bayonet ring
Lens	402/502 Series (all)	Laminated safety glass
Pointer	402/502 Series (all)	Black finished Aluminum
Dial	402/502 Series (all)	Aluminum, white background with black scale. UV resistant.
Movement	402/502 Series (all)	Stainless Steel with highly polished bearing surfaces
Fill liquids	502 Series (Bottom connected only)	Glycerin

* For every 68 °F (20 °C) shift in temperature from which the gauge is calibrated, the user can experience up to ±0.4% additional error.

For details on accuracy/standard dial configuration and dial layouts, see pages 56-61.



WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

ORDERING INFORMATION					
GAUGE SIZE	40	4"	60	6"	*
CASE TYPES	402	Dry, bottom connection	412	Dry, lower back connection	502 Liquid filled, bottom connection
PRESSURE RANGES	30000	0 psi to 30,000 psi	50000	0 psi to 50,000 psi	75000 0 psi to 75,000 psi
	40000	0 psi to 40,000 psi	60000	0 psi to 60,000 psi	85000 0 psi to 85,000 psi **
SCALE OPTIONS	psi	psi single scale	psi/kg/cm²	psi/kg/cm² dual scale	
	psi/kPa	psi/kPa dual scale	psi/bar	psi/bar dual scale	
CONNECTION SIZES ***	9/16-18	9/16"-18 UNF 2B high pressure cone - Female	9/16-HPM	9/16"-18 UNF 2A left hand thread - Male	
OPTIONS	BRSP	Bayonet Ring Adjustable Set Pointer	SL	Silicone Fill	ST Stainless Steel Tagging
	LM	Laser Marking	SP	Red Set Pointer	IA Increased Accuracy
	MIP	Maximum Indicating Pointer	SSFF	304SS Front Flange	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Bottom connection only.

** Only available on 60-402 and 60-502 models, with $\pm 1.6\%$ accuracy.

*** Additional process connection sizes available, consult factory.

EXAMPLE

40 - 402 - 30000 - psi - 9/16-18 - BRSP

Gauge size 4"

Case type Dry, bottom connection


Pressure range & scale option 0 psi to 30,000 psi

Connection size 9/16"-18 UNF 2B high pressure cone

Option Bayonet Ring Adjustable Set Pointer


9/16"-18 UNF 2B High Pressure Cone Connection

Female

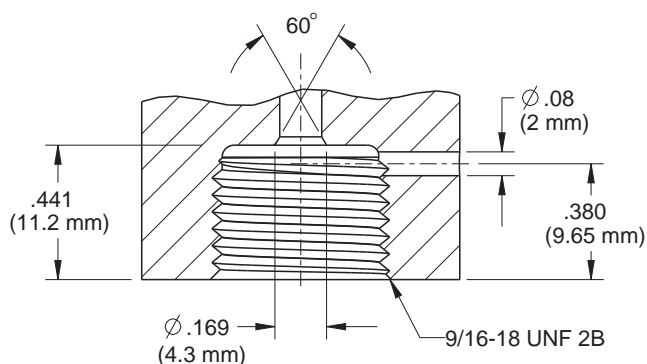


9/16"-18 UNF 2A left hand thread

Male

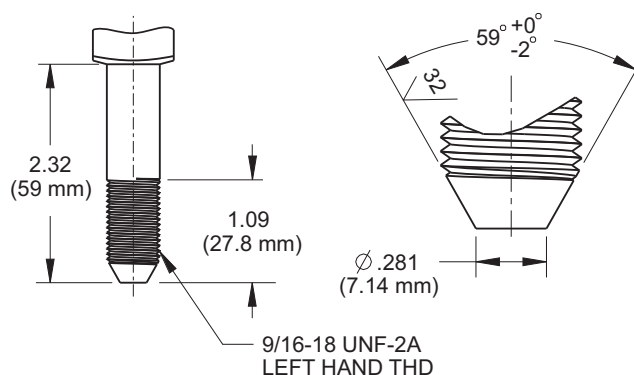


Dimensions


40-402/502

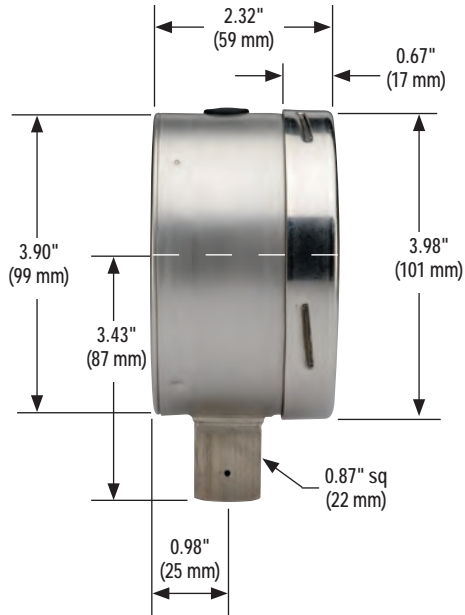


40-412

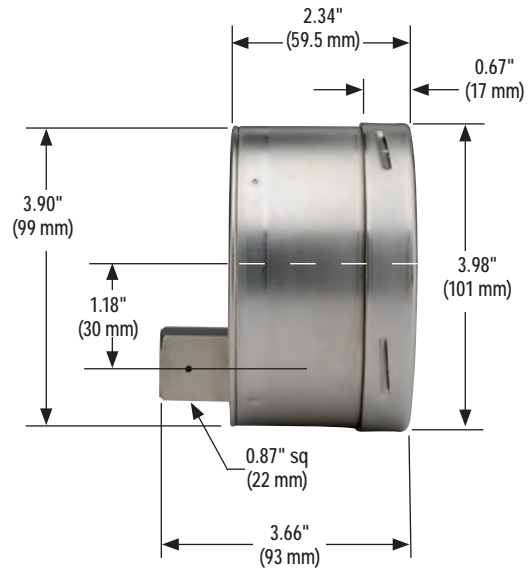


60-402/502

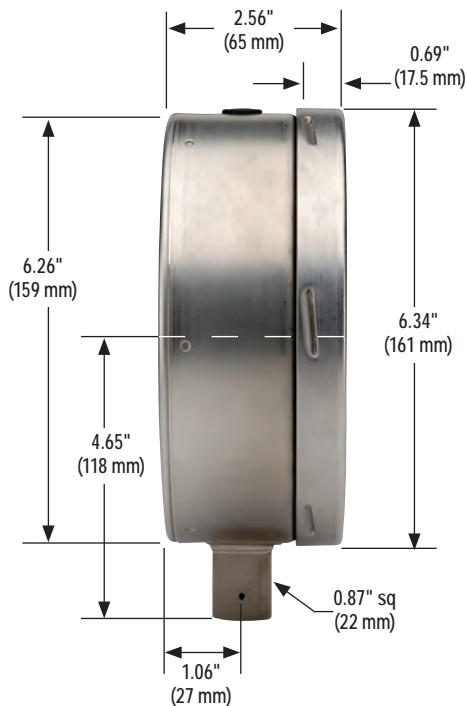


40-402/502 Front Flange

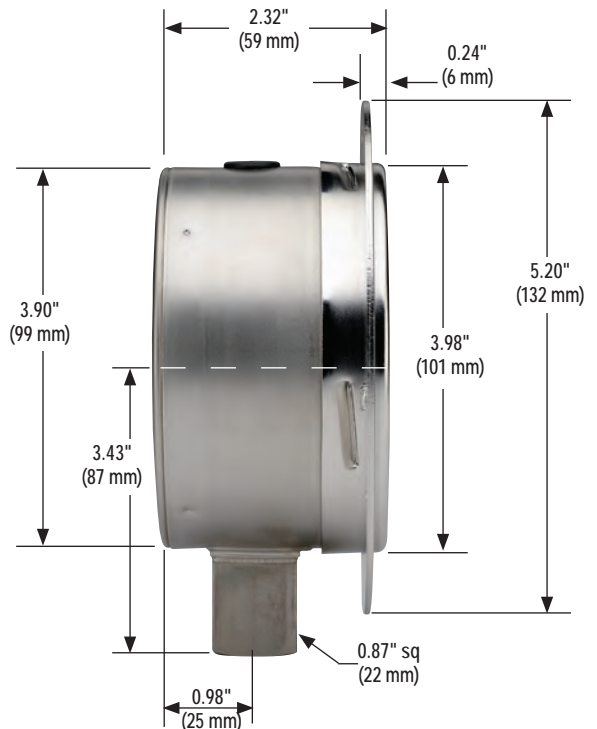

40-412 Front Flange

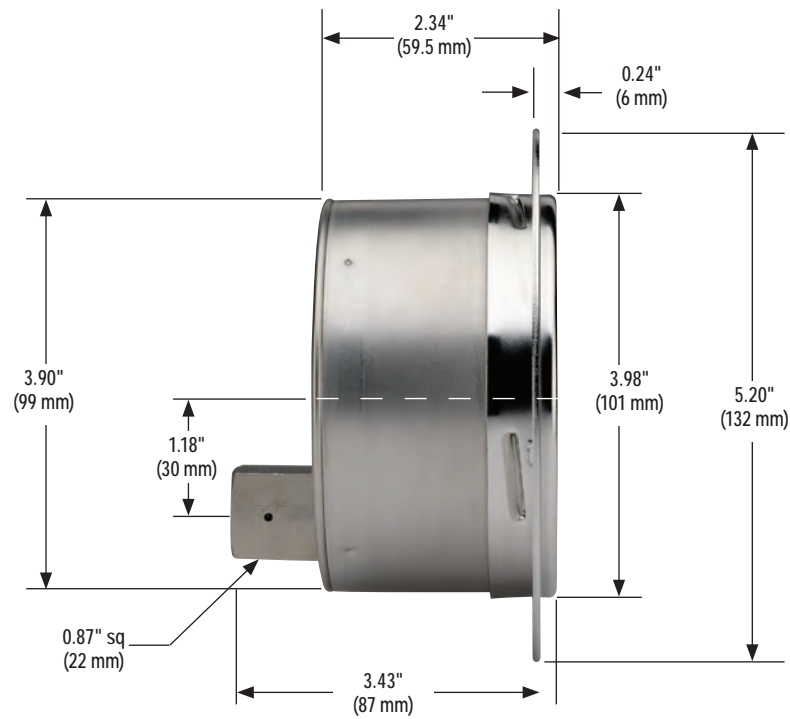

60-402/502 Front Flange

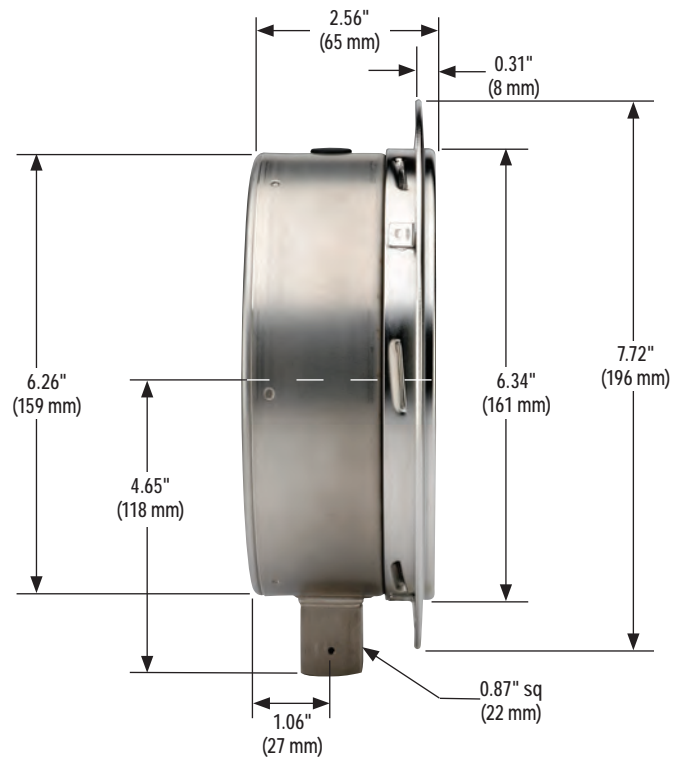



600/700 SERIES

- Turret style dry or liquid-filled gauge
- Vacuum and compound ranges through 0 psi to 15,000 psi
- 4-1/2" gauge sizes
- Black Polypropylene safety case with solid front and blow-out back
- Phosphor bronze, 316 stainless steel and brass wetted parts

OPERATING SPECIFICATIONS

1. Working Pressure Limitations

a. Dynamic Pressure

The working pressure should be limited to 60% of the dial range.

b. Static Pressure

The working pressure, where no sharp fluctuations occur, should be limited to 90% of the dial range

APPLICATIONS

- Injection molding machines
- Laboratory & test equipment
- Power generation
- Oil field & offshore
- Utilities
- Water & wastewater

	SERIES	SPECIFICATIONS
Pressure ranges	600/700 Series (all)	Vacuum and compound ranges through 0 psi to 15,000 psi
Accuracy	600/700 Series (all)	±0.5% full scale
Temperature ranges*	45-640	Media -4 °F to 150 °F (-20 °C to 65 °C) Ambient -40 °F to 150 °F (-40 °C to 65 °C)
	45-740	Media -40 °F to 212 °F (-40 °C to 100 °C) 500 °F (260 °C) Maximum for short term/intermittent Ambient -40 °F to 150 °F (-40 °C to 65 °C)
	45-660	Media -4 °F to 150 °F (-20 °C to 65 °C) Glycerin fill -40 °F to 150 °F (-40 °C to 65 °C) Special fill Ambient -4 °F to 150 °F (-20 °C to 65 °C) Glycerin fill -40 °F to 150 °F (-40 °C to 65 °C) Special fill
	45-760	Media -4 °F to 212 °F (-20 °C to 100 °C) Glycerin fill -40 °F to 212 °F (-40 °C to 100 °C) Special fill 250 °F (130 °C) Maximum for short term/intermittent Ambient -4 °F to 150 °F (-20 °C to 65 °C) Glycerin fill -40 °F to 150 °F (-40 °C to 65 °C) Special fill
Case	600/700 Series (all)	Turret style black Polypropylene case. Solid front, safety case with blow-out back
Bayonet ring	600/700 Series (all)	Threaded black PBT
Lens	600/700 Series (all)	Acrylic
Measuring Element	45-640, 45-660 (≤ 600 psi)	Copper alloy C-Type Bourdon tube
	45-740, 45-760 (≤ 600 psi)	316 stainless steel C-Type Bourdon tube
	600/700 Series (all) (>600 psi)	316 stainless steel coiled safety Bourdon tube
Connection	45-640, 45-660	1/4" NPT, brass
	45-740, 45-760	1/4" NPT or 1/2" NPT, 316 stainless steel
Movement	45-640, 45-660	Brass and nickel-silver with highly polished bearing surfaces. An internal zero stop is standard.
	45-740, 45-760	Stainless steel with highly polished bearing surfaces. An internal zero stop is standard.
Pointer	600/700 Series (all)	Balanced micro-adjustable aluminum, black finish
Dial	600/700 Series (all)	Aluminum, white background with black scale. UV resistant.
Fill liquid **	45-660, 45-760	Glycerin

* For every 18 °F (10 °C) shift in temperature from which the gauge is calibrated, the user can experience up to ±0.4% additional error.

** See page 51 for gauge fill options.

For details on accuracy/standard dial configuration and dial layouts, see pages 52-56.

NOSHOK 600 Series Gauges:



WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

NOSHOK 700 Series Gauges:



WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

ORDERING INFORMATION					
GAUGE SIZES	45 4-1/2"				
CASE TYPES	640	Brass, dry, bottom connection	660	Brass, liquid filled, bottom connection	
	740	SS, dry, bottom connection	760	SS, liquid filled, bottom connection	
PRESSURE RANGES	30vac	-30 inHg to 0 psi	30/300	-30 inHg to 0 to 300 psi	300 0 psi to 300 psi
	30/15	-30 inHg to 0 to 15 psi	15	0 psi to 15 psi	400 0 psi to 400 psi
	30/30	-30 inHg to 0 to 30 psi	30	0 psi to 30 psi	600 0 psi to 600 psi
	30/60	-30 inHg to 0 to 60 psi	60	0 psi to 60 psi	800 0 psi to 800 psi
	30/100	-30 inHg to 0 to 100 psi	100	0 psi to 100 psi	1000 0 psi to 1,000 psi
	30/160	-30 inHg to 0 to 160 psi	160	0 psi to 160 psi	1500 0 psi to 1,500 psi
	30/200	-30 inHg to 0 to 200 psi	200	0 psi to 200 psi	2000 0 psi to 2,000 psi
SCALE OPTIONS	psi	psi single scale	psi/kg/cm ²	psi/kg/cm ² dual scale	psi/bar psi/bar dual scale
CONNECTION SIZES	1/4	1/4" NPT	1/2	1/2" NPT	
OPTIONS	SG	Safety Glass Lens	CPMR	Uninstalled Chrome Panel Mount Ring	BP3 Brass Press Fit Orifice 0.3 mm
	GL	Glass Lens	OS	Overload Stop	BT3 Brass Threaded Orifice 0.3 mm
	MIP	Maximum Indicating Pointer	LM	Laser Marking	ST8 316SS Threaded Orifice 0.8 mm
	BPMR	Uninstalled Black Panel Mount Ring	ST	Stainless Steel Tagging	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

NOTE: Refer to 600/700 Series Options & Accessories chart on page 52 for availability by part number.

EXAMPLE

45 - 740 - 100 - psi - 1/2 - ST8



Gauge size 4-1/2"

Case type SS internals, dry, bottom connection



Pressure range & scale option 0 psi to 100 psi

Connection size 1/2" NPT

Option 316SS Threaded Orifice 0.8 mm

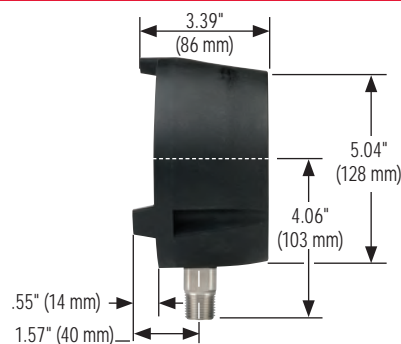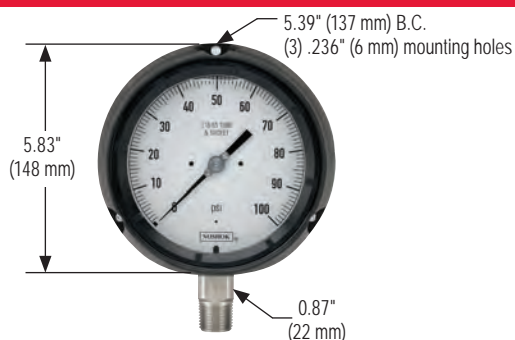

45-640/660 & 45-740/760 Panel Mount Ring

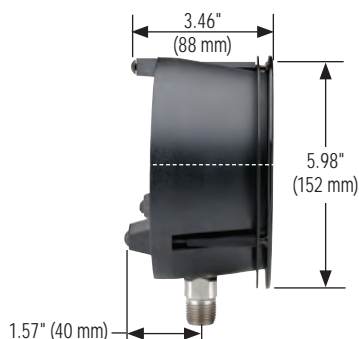



800 SERIES

- Highly accurate dry gauge
- Vacuum and compound ranges through 0 psi to 6,000 psi
- 6" gauge size
- Stainless Steel case
- Beryllium copper, 316 Stainless Steel, and Brass wetted parts

OPERATING SPECIFICATIONS

1. Working Pressure Limitations

a. Static Pressure

The working pressure, where no sharp fluctuations occur, should be limited to 100% of the dial range.

NOTE: 800 Series Precision Test gauges are not intended for dynamic applications.

APPLICATIONS

- Aerospace equipment
- Gauge repair facilities
- Laboratory & test equipment
- Precision measurement

	SERIES	SPECIFICATIONS
Pressure ranges	60-800	Vacuum and compound ranges through 0 psi to 6,000 psi
Accuracy	60-800	±0.25% full scale
Temperature ranges*	60-800	Media -40 °F to 180 °F (-40 °C to 80 °C) Ambient -40 °F to 140 °F (-40 °C to 60 °C)
Measuring element	60-800	Beryllium copper Bourdon tube to 1,000 psi 316 SS Bourdon tube 1,500 psi to 6,000 psi
Connection	60-800	1/4" NPT bottom connection, Brass
Case	60-800	304 Stainless Steel
Cover ring	60-800	304 Stainless Steel
Lens	60-800	Instrument glass
Pointer	60-800	Adjustable knife-edge pointer
Dial	60-800	Aluminum, white mirrored background with black scale.
Movement	60-800	Brass with jeweled bearings Nickel-silver pinion gear and shafts

* For every 18 °F (10 °C) shift in temperature from which the gauge is calibrated, the user can experience up to ±0.4% additional error.

For details on accuracy/standard dial configuration and dial layouts, see pages 56-61.



ORDERING INFORMATION					
GAUGE SIZE	60 6"				
CASE TYPE	800 SS Case, bottom connection				
PRESSURE RANGES	30vac	-30 inHg to 0 psi	30/300	-30 inHg to 0 to 300 psi	300 0 psi to 300 psi
	30/15	-30 inHg to 0 to 15 psi	15	0 psi to 15 psi	400 0 psi to 400 psi
	30/30	-30 inHg to 0 to 30 psi	30	0 psi to 30 psi	600 0 psi to 600 psi
	30/60	-30 inHg to 0 to 60 psi	60	0 psi to 60 psi	1000 0 psi to 1,000 psi
	30/100	-30 inHg to 0 to 100 psi	100	0 psi to 100 psi	1500 0 psi to 1,500 psi
	30/160	-30 inHg to 0 to 160 psi	160	0 psi to 160 psi	2000 0 psi to 2,000 psi
	30/200	-30 inHg to 0 to 200 psi	200	0 psi to 200 psi	3000 0 psi to 3,000 psi
SCALE OPTION	psi psi single scale				
CONNECTION SIZES	1/4	1/4" NPT	1/2	1/2" NPT	SST SAE J1926-3: 7/16-20 Adjustable
OPTIONS	SSFF	304SS Front Flange	ST	Stainless Steel Tagging	
	SSRF	304SS Rear Flange	BP3	Brass Press Fit Orifice 0.3 mm	
	GC	Gauge Carrying Case	BT8	Brass Threaded Orifice 0.8 mm	
	LM	Laser Marking			

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

NOTE: Refer to 800 Series Options & Accessories chart on page 52 for availability by part number.

EXAMPLE

60 - 800 - 100 - psi - 1/4 - GC

Gauge size6"

Case typeSS case, bottom connection

Pressure range & scale option0 psi to 100 psi


Connection size.....1/4" NPT

Option.....Gauge Carrying Case

60-800*

60-800 Front Flange

60-800 Rear Flange

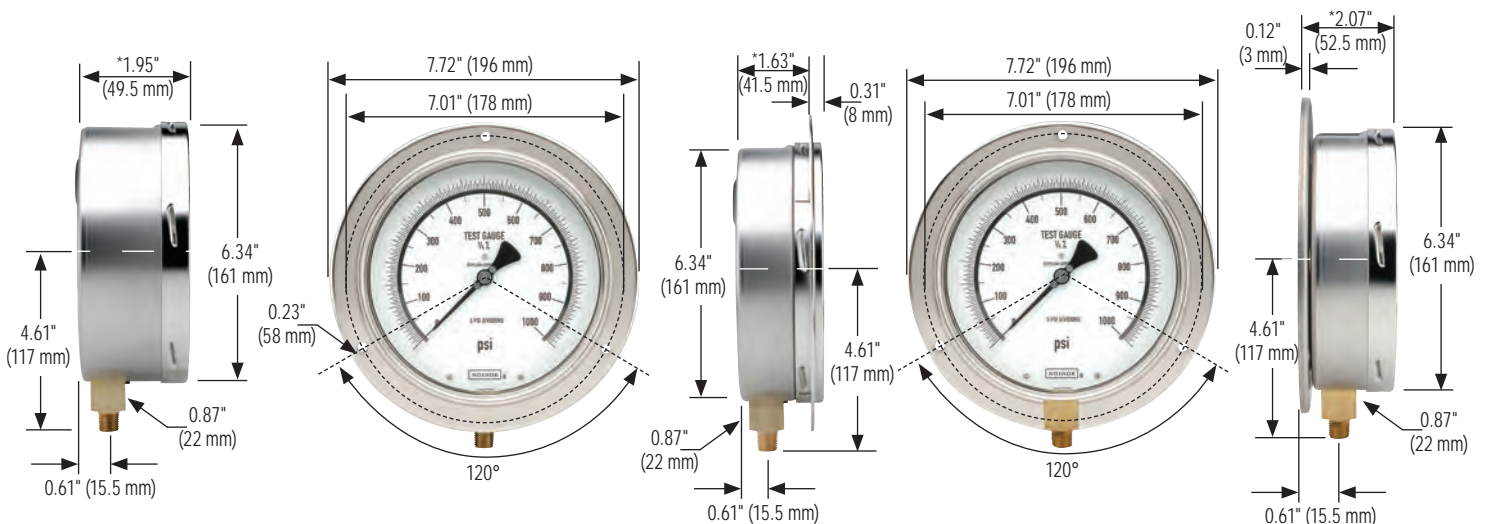

ABS & Stainless Steel Case, Liquid Filled



900 SERIES

- High quality liquid filled gauge
- Vacuum and compound ranges through 0 psi to 15,000 psi
- 1-1/2", 2", 2-1/2" and 4" gauge sizes
- Impact-resistant ABS and Stainless Steel case
- Copper alloy and Brass wetted parts

OPERATING SPECIFICATIONS

1. Working Pressure Limitations

a. Dynamic Pressure

The working pressure should be limited to 60% of the dial range.

b. Static Pressure

The working pressure, where no sharp fluctuations occur, should be limited to 90% of the dial range

APPLICATIONS

- Automotive
- Construction
- Hydraulics & pneumatics
- Power generation
- Transportation
- Water management

	SERIES	SPECIFICATIONS
Pressure ranges	900 Series (all)	Vacuum and compound ranges through 0 psi to 15,000 psi
Accuracy	15-910	±2.5% full scale
	25-900, 25-910, 25-901, 25-911	±1.6% full scale
	40-901, 40-911	±1% full scale
Temperature ranges*	900 Series (all)	Media -4 °F to 140 °F (-20 °C to 60 °C) Glycerin fill -40 °F to 140 °F (-40 °C to 60 °C) Special fill Ambient -4 °F to 140 °F (-20 °C to 60 °C) Glycerin fill -40 °F to 140 °F (-40 °C to 60 °C) Special fill
Measuring element	900 Series (up to 600 psi)	Copper alloy C-Type Bourdon tube
	900 Series (> 600 psi)	Coiled safety tube
Connection	15-910	1/8" NPT, Brass
	25-900, 25-910, 25-901, 25-911	1/4" NPT or 7/16"-20 adjustable, Brass
	40-901, 40-911	1/4" NPT, Brass 1/2" NPT, Brass
Case	15-910, 25-900, 25-910	ABS with safety relief plug
	25-901, 25-911, 40-901, 40-911	304 Stainless Steel
Bezel	25-901, 25-911, 40-901, 40-911	304 Stainless Steel
Lens	15-910, 25-900, 25-910	Acrylic; ultrasonically welded to the case
	25-901, 25-911, 40-901	Polycarbonate
Pointer	15-910, 25-900, 25-910, 25-901, 25-911	Molded plastic
	40-901, 40-911	Balanced Aluminum, black finish
Dial	15-910, 25-900, 25-910, 25-901, 25-911	Molded plastic, white background with black primary scale & red secondary scale. UV resistant
	40-901, 40-911	Aluminum, white background with black primary scale & red secondary scale. UV resistant.
Movement	15-910, 25-900, 25-910, 25-901, 25-911	Brass and nylon with highly polished bearing surfaces
Fill liquid**	15-910	86.5/13.5 Glycerin:H ₂ O

* For every 18 °F (10 °C) shift in temperature from which the gauge is calibrated, the user can experience up to ±0.4% additional error.

** See page 51 for gauge fill options.

For details on accuracy/standard dial configuration and dial layouts, see pages 56-61.



WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

ORDERING INFORMATION					
GAUGE SIZES	15 1-1/2"	20 2"	25 2-1/2"	40 4"	
CASE TYPES	900 ABS Case, bottom connection 901 SS Case, bottom connection		910 ABS Case, back connection 911 SS Case, back connection		
PRESSURE RANGES	30vac -30 inHg to 0 psi 30/15 -30 inHg to 0 to 15 psi 30/30 -30 inHg to 0 to 30 psi 30/60 -30 inHg to 0 to 60 psi 30/100 -30 inHg to 0 to 100 psi 30/160 -30 inHg to 0 to 160 psi 30/200 -30 inHg to 0 to 200 psi 30/300 -30 inHg to 0 to 300 psi 15 0 psi to 15 psi 30 0 psi to 30 psi 60 0 psi to 60 psi	100 0 psi to 100 psi 160 0 psi to 160 psi 200 0 psi to 200 psi 300 0 psi to 300 psi 400 0 psi to 400 psi 600 0 psi to 600 psi 800 0 psi to 800 psi 1000 0 psi to 1,000 psi 1500 0 psi to 1,500 psi 2000 0 psi to 2,000 psi 3000 0 psi to 3,000 psi	5000 0 psi to 5,000 psi 6000 0 psi to 6,000 psi 7500 0 psi to 7,500 psi 10000 0 psi to 10,000 psi 15000 0 psi to 15,000 psi -1 -1 bar to 0 bar 1 0 bar to 1 bar 1.6 0 bar to 1.6 bar 2.5 0 bar to 2.5 bar 4 0 bar to 4 bar 6 0 bar to 6 bar	10 0 bar to 10 bar 16 0 bar to 16 bar 25 0 bar to 25 bar 40 0 bar to 40 bar 60 0 bar to 60 bar 100 0 bar to 100 bar 160 0 bar to 160 bar 250 0 bar to 250 bar 400 0 bar to 400 bar 600 0 bar to 600 bar 1000 0 bar to 1,000 bar	
SCALE OPTIONS	psi psi single scale psi/bar psi/bar dual scale	psi/kg/cm ² psi/kg/cm ² dual scale	bar/psi bar/psi dual scale	psi/kPa psi/kPa dual scale	
CONNECTION SIZES	1/8 1/8" NPT	1/4 1/4" NPT	1/2 1/2" NPT	SST SAE J1926-3/7/16-20 Adjustable *	
OPTIONS	PMC Steel Panel Mount Clamp SPMC 304SS Panel Mount Clamp SSBU Stainless Steel Bezel & U-clamp SSB Stainless Steel Bezel SSCR 304SS Cover Ring	AP Adjustable Pointer MIP Maximum Indicating Pointer SP Red Set Pointer SG Safety Glass Lens BLFF Black Front Flange	SSFF 304SS Front Flange SSRF 304SS Rear Flange LM Laser Marking ST Stainless Steel Tagging	BP3 Brass Press Fit Orifice 0.3 mm BT5 Brass Threaded Orifice 0.5 mm BT8 Brass Threaded Orifice 0.8 mm	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

NOTE: Refer to 900 Series Options & Accessories chart on page 53 for availability by series number.

* Includes FKM o-ring

EXAMPLE

25 - 910 - 1000 - psi /kPa - 1/4 - PMC

Gauge size 2-1/2"


Case type ABS case, liquid filled, back connection

Pressure range & scale option 0 psi to 1,000 psi/kPa


Connection size 1/4" NPT

Option Panel Mount Clamp

25-900

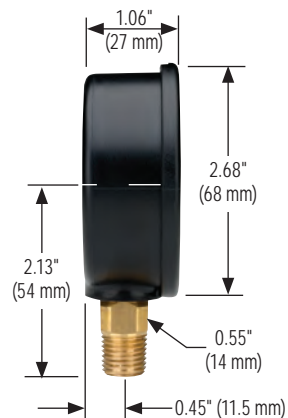


25-901

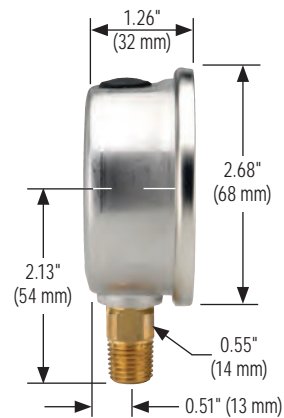


Dimensions


15-910

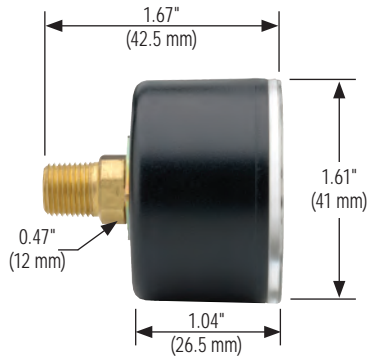


25-910

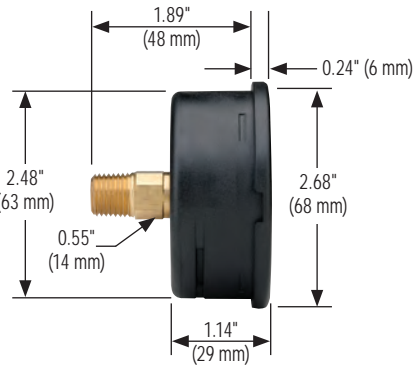

25-911

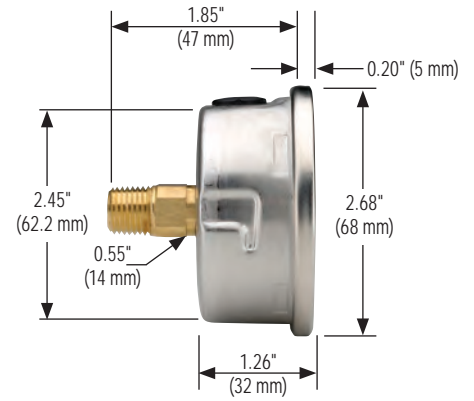


40-901

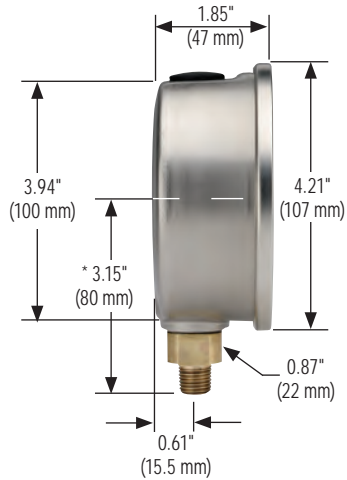


* 1/4" NPT shown
Add 6 mm for 1/2" NPT


40-911

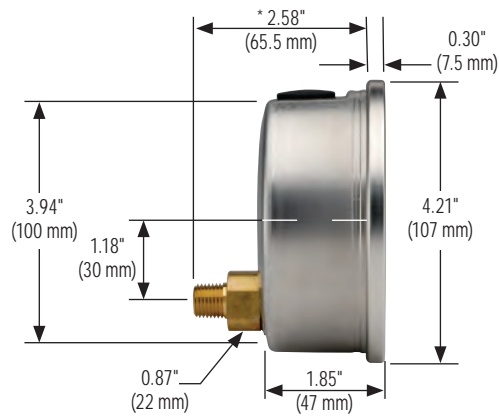


25-910 Front Flange

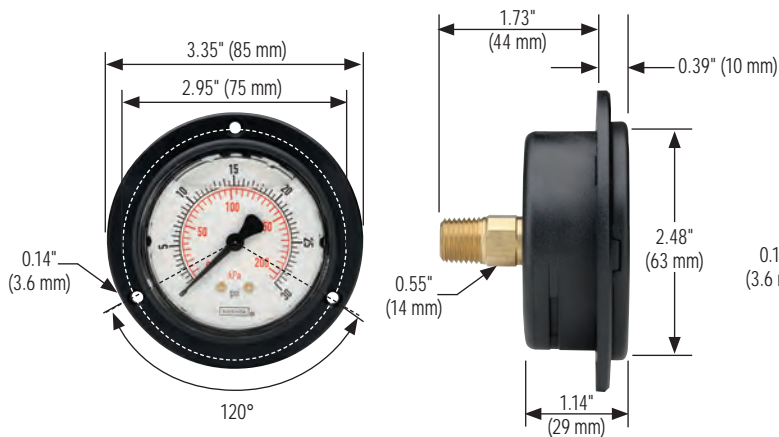


25-911 Front Flange

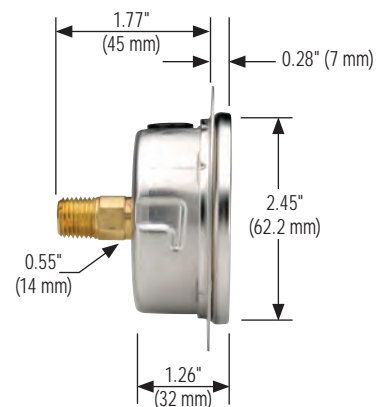


40-911 Front Flange

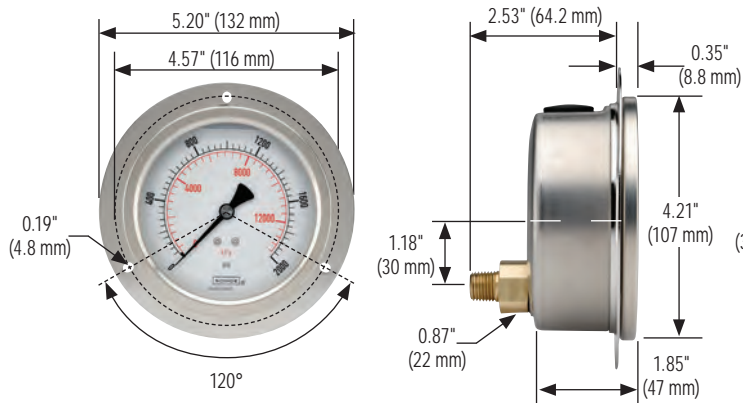


40-901 Rear Flange

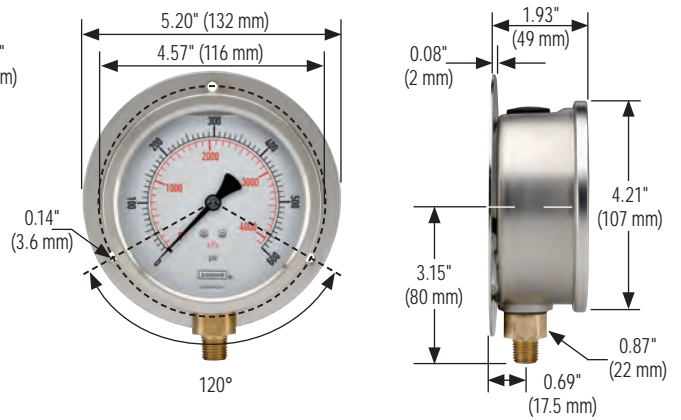


40-911 Rear Flange

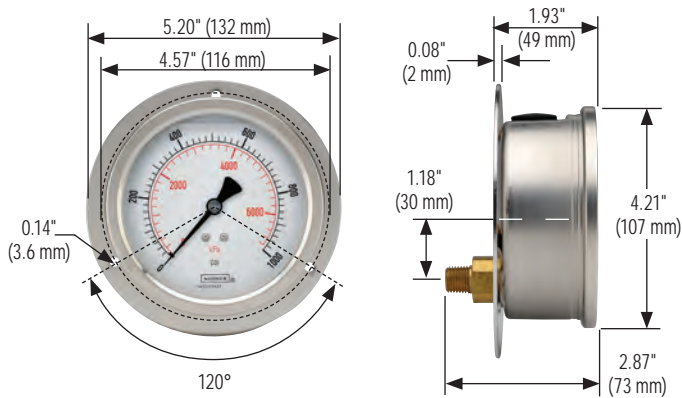


25-911 Flange Ring

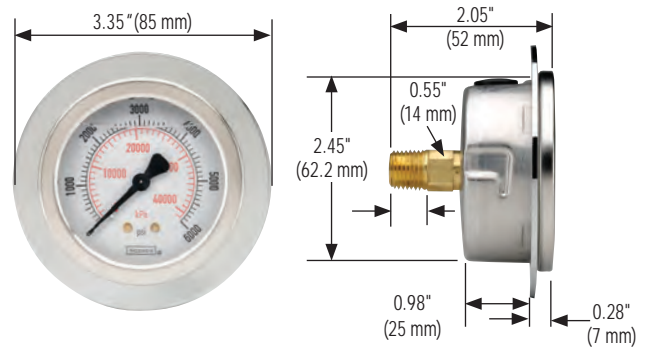

25-910 Panel Mount Clamp

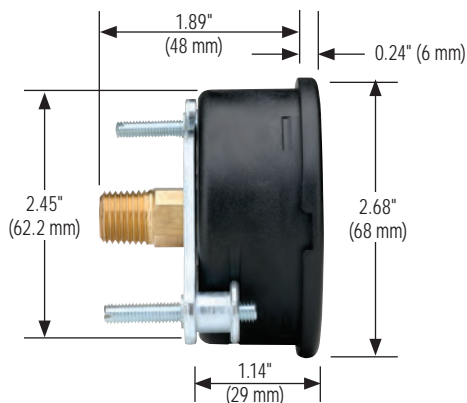

25-911 Panel Mount Clamp

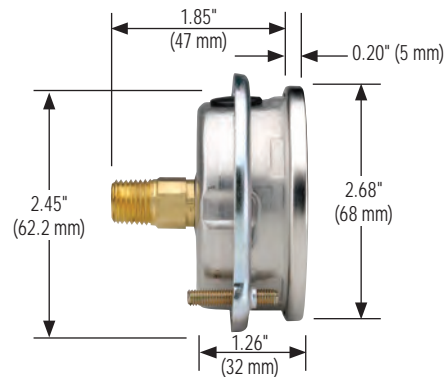



1000 SERIES

- Simple, rugged, compact differential pressure gauge
- Ranges from 0 psid to 5 psid through 0 psid to 110 psid
- 2-1/2", 4-1/2" and 6" gauge sizes
- Engineered plastic gauge case
- Clear anodized Aluminum and 316 Stainless Steel wetted parts

APPLICATIONS

- Heat exchangers
- Filter monitoring
- Flow indication
- Level indication

SPECIFICATIONS

Pressure ranges	0 psid to 5 psid through 0 psid to 110 psid
Max. working static pressure	Aluminum 3,000 psig; Stainless Steel 6,000 psig
Accuracy	±3/2/3% of full scale on rising pressure
Temperature ranges (Including switch option)	Media -40 °F to 200 °F (-40 °C to 93 °C) Ambient -40 °F to 200 °F (-40 °C to 93 °C) Storage -40 °F to 200 °F (-40 °C to 93 °C)
Temperature ranges (4-20 mA transmitter option)	Ambient -20 °F to 150 °F (-29 °C to 66 °C)
Measuring element	316 Stainless Steel and ceramic piston/magnet
O-ring & diaphragm material	NBR
Connection	1/4" NPT female, back connection
Sensor housing material	Clear anodized Aluminum
Case	Engineered plastic
Bezel	Engineered plastic
Lens	Shatter-resistant acrylic
Pointer	Balanced Aluminum, black finish
Dial	Aluminum, white background with black scale
Movement	Magnetic
Optional switch rating	SPDT, 3W, 0.25 Amp, 125 Vac/Vdc (standard) (switch adjustable range of 15-95%). Other options available, consult factory.



ORDERING INFORMATION				
GAUGE SIZES & SERIES	25 - 10 2-1/2"	45 - 10 4-1/2"	60 - 10 6"	
CONNECTION LOCATIONS	0 Bottom	1 Back	2 Side	
CONNECTION SIZE	2 1/4" NPT female	9 7/16-20 female (Back only)		
PRESSURE RANGES *	P5 0 psid to 5 psid	P20 0 psid to 20 psid	P50 0 psid to 50 psid	P100 0 psid to 100 psid
	P10 0 psid to 10 psid	P25 0 psid to 25 psid	P60 0 psid to 60 psid	P110 0 psid to 110 psid
	P15 0 psid to 15 psid	P30 0 psid to 30 psid	P75 0 psid to 75 psid	
SENSOR HOUSING MATERIALS	A Aluminum (3,000 max working pressure)		S 316L Stainless Steel (6,000 max working pressure)	
O-RING & DIAPHRAGM MATERIALS	1 PTFE	3 NBR		
	2 FKM	4 EPDM		
CASE MATERIALS	A Aluminum (4-1/2" only)	P Engineered plastic		
LENSES	1 Shatter-resistant acrylic	2 Safety glass **	3 Maximum indicating pointer (MIP) ***	
FILL FLUID (optional)	GY Glycerin	SL Silicone †		
SWITCH OR TRANSMITTER TYPE & HOUSING	1 Single switch, flying leads with grommet wire seal		5 Single switch with Hirschman electrical connection	
	2 Dual switch, flying leads with grommet wire seal		6 Dual switch with Hirschman electrical connection	
	3 Single switch, flying leads with 1/4" female NPT, NEMA 4X		7 4-20 mA transmitter in NEMA 4x IP65 plastic enclosure with terminal strip (1/2" female NPT conduit connection)	
	4 Dual switch, flying leads with 1/4" female NPT, NEMA 4X			
OPTIONS	MH (2) 1/4-20 Mounting Holes		RP Reversed Ports	
	MK5-CS Pipe Mounting Kit, Steel		ST Stainless Steel Tagging	
	MK5-SS Pipe Mounting Kit, Stainless Steel		WMK Wall Mounting Kit	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.


* Other ranges and scales available on request.

** Only available with dry, 4-1/2" gauge size with Aluminum case.

*** Available with dry gauge only, 2-1/2" and 4-1/2" gauge sizes only.


† Optional Silicone filling available with 2-1/2" and 6" gauge case sizes, and 4-1/2" gauge case size with Aluminum case and standard shatter-resistant acrylic lens only.

EXAMPLE

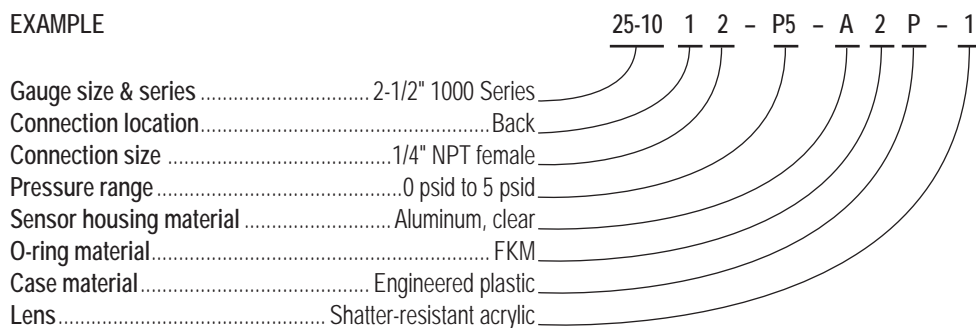


Dimensions


2-1/2" Gauge

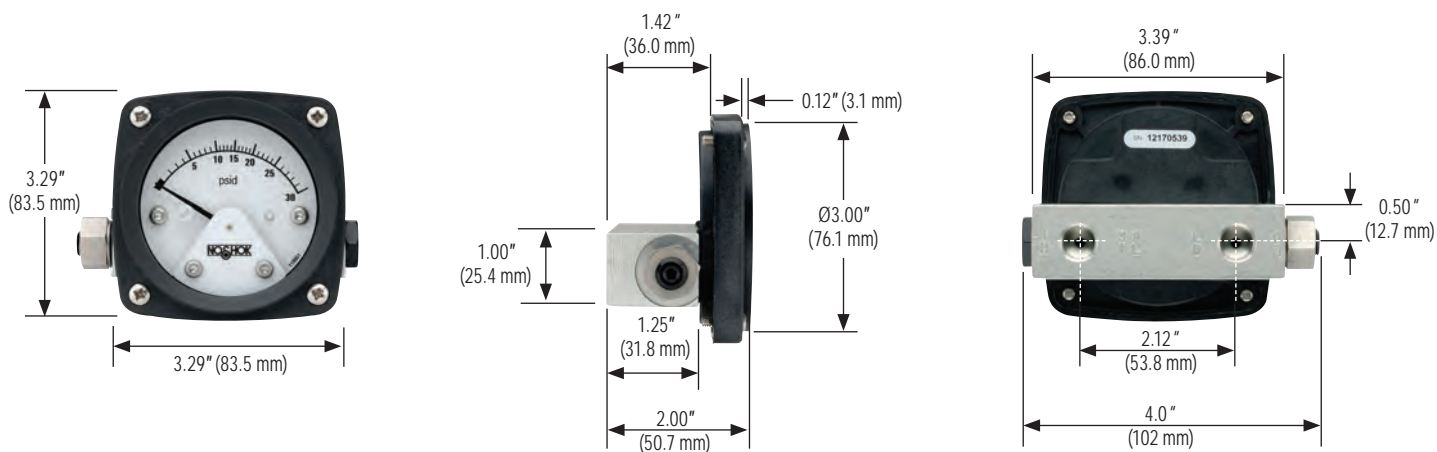

4-1/2" Gauge

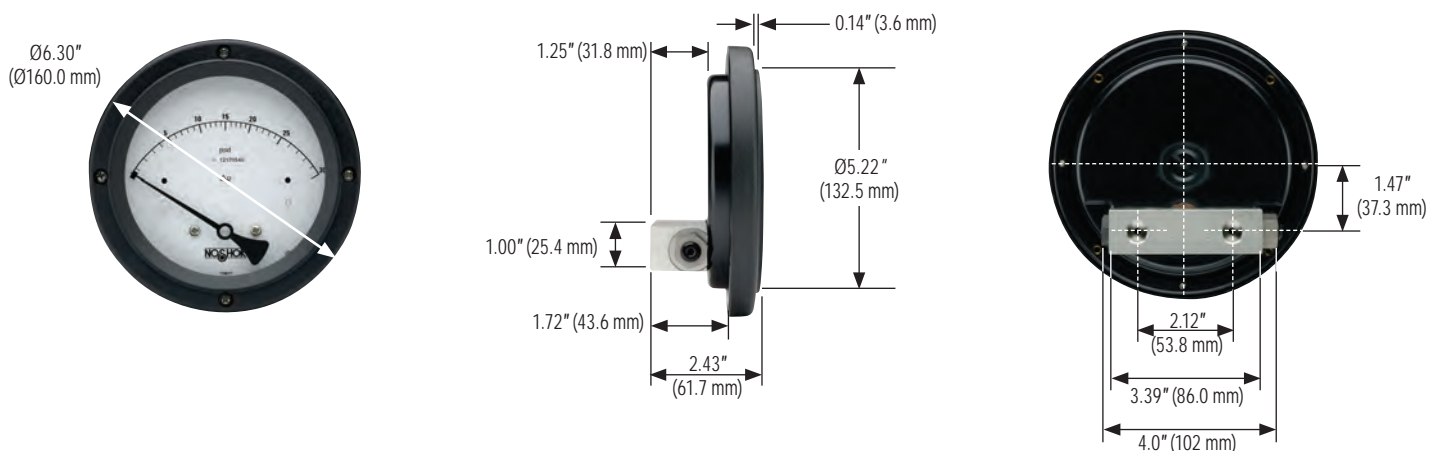

6" Gauge

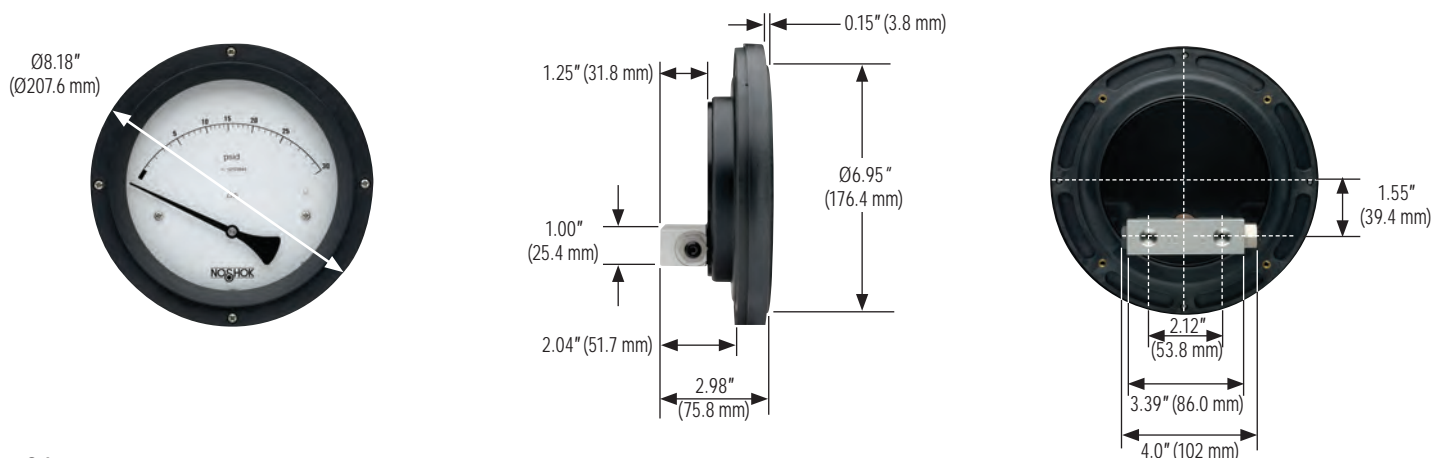


1000 SERIES


Single switch, flying leads with grommet wire seal




Dual switch, flying leads with grommet wire seal

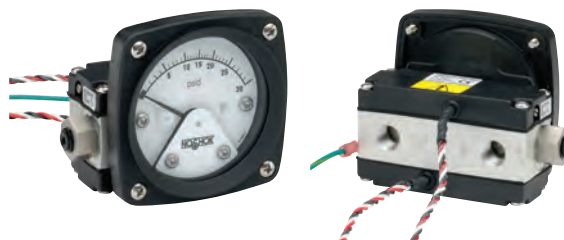

Single switch, flying leads with 1/4" female NPT, NEMA 4X

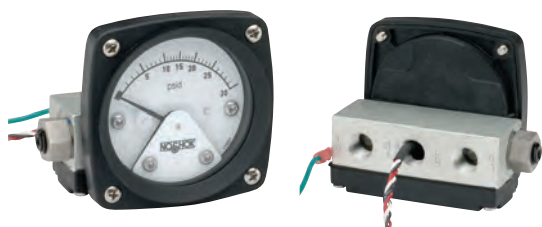

Dual switch, flying leads with 1/4" female NPT, NEMA 4X

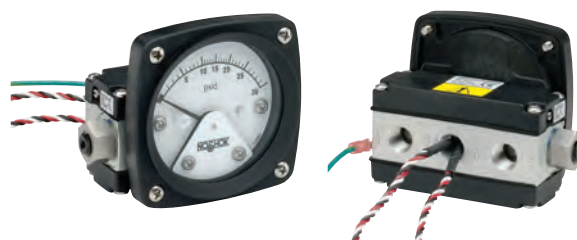

Single switch with Hirschman electrical connection



Dual switch with Hirschman electrical connection



4-20 mA transmitter in NEMA 4x IP65 plastic enclosure with terminal strip (1/2" female NPT conduit connection)





1100 SERIES

- Simple, rugged, compact differential pressure gauge
- Ranges from 0 inH₂O to 20 inH₂O through 0 psid to 100 psid
- 2-1/2", 4-1/2" and 6" gauge sizes
- Engineered plastic gauge case
- Black anodized Aluminum and 316 Stainless Steel wetted parts

APPLICATIONS

- Heat exchangers
- Filter monitoring
- Flow indication
- Level indication

SPECIFICATIONS

Pressure ranges	0 inH ₂ O to 20 inH ₂ O through 0 psid to 100 psid
Max. working static pressure	Aluminum & Stainless Steel 3,000 psig; Brass 1,500 psig
Accuracy	±3/2/3% of full scale on rising pressure
Temperature ranges (Including switch option)	Media -40 °F to 200 °F (-40 °C to 93 °C) Ambient -40 °F to 200 °F (-40 °C to 93 °C) Storage -40 °F to 200 °F (-40 °C to 93 °C)
Temperature ranges (4-20 mA transmitter option)	Ambient -20 °F to 150 °F (-29 °C to 66 °C)
Measuring element	316 Stainless Steel and ceramic magnet
O-ring & diaphragm material	NBR
Connection	1/4" NPT female, back connection
Sensor housing material	Black anodized Aluminum
Case	Engineered plastic
Bezel	Engineered plastic
Lens	Shatter-resistant acrylic
Pointer	Balanced Aluminum, black finish
Dial	Aluminum, white background with black scale
Movement	Magnetic
Optional switch rating	SPDT, 3W, 0.25 Amp, 125 Vac/Vdc (standard) (switch adjustable range of 15-95%). Other options available, consult factory.



ORDERING INFORMATION									
GAUGE SIZES & SERIES	25 - 11	2-1/2"	45 - 11	4-1/2"	60 - 11	6"			
CONNECTION LOCATIONS	0	Dual top & bottom ***	1	Back	2	Side	3	Bottom	
CONNECTION SIZE	2	1/4" NPT female	9	7/16-20 female (Back or side only)					
PRESSURE RANGES*	W20	0 inH ₂ O to 20 inH ₂ O	W75	0 inH ₂ O to 75 inH ₂ O	W400	0 inH ₂ O to 400 inH ₂ O	P30	0 psid to 30 psid	
	W25	0 inH ₂ O to 25 inH ₂ O	W100	0 inH ₂ O to 100 inH ₂ O	P5	0 psid to 5 psid	P50	0 psid to 50 psid	
	W30	0 inH ₂ O to 30 inH ₂ O	W135	0 inH ₂ O to 135 inH ₂ O	P10	0 psid to 10 psid	P60	0 psid to 60 psid	
	W40	0 inH ₂ O to 40 inH ₂ O	W150	0 inH ₂ O to 150 inH ₂ O	P15	0 psid to 15 psid	P75	0 psid to 75 psid	
	W50	0 inH ₂ O to 50 inH ₂ O	W200	0 inH ₂ O to 200 inH ₂ O	P20	0 psid to 20 psid	P100	0 psid to 100 psid	
	W60	0 inH ₂ O to 60 inH ₂ O	W300	0 inH ₂ O to 300 inH ₂ O	P25	0 psid to 25 psid			
SENSOR HOUSING MATERIALS	A	Aluminum, black	B	Brass	S	316L Stainless Steel			
O-RING & DIAPHRAGM MATERIALS	2	FKM	3	NBR	4	EPDM			
CASE MATERIAL	A	Aluminum (4-1/2" only)		P	Engineered plastic				
LENSES	1	Shatter-resistant acrylic		2	Safety glass**		3	Maximum indicating pointer (MIP) †	
FILL FLUIDS (optional)	GY	Glycerin		SL	Silicone ††				
SWITCH OR TRANSMITTER TYPE & HOUSING (OPTIONAL)	3	Single switch, NEMA 4X			7	4-20 mA transmitter in NEMA 4x IP65 plastic enclosure with terminal strip (1/2" female NPT conduit connection).			
	4	Dual switch, NEMA 4X							
OPTIONS	MH	(2) 1/4-20 Mounting Holes			RP	Reversed Ports			
	MK5-CS	Pipe Mounting Kit, Steel			ST	Stainless Steel Tagging			
	MK5-SS	Pipe Mounting Kit, Stainless Steel			WMK	Wall Mounting Kit			

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Other ranges and scales available on request.

** Only available with dry, 4-1/2" gauge size with Aluminum case.

*** Not available with switch or transmitter option.

† Available with dry gauge only, 2-1/2" and 4-1/2" gauge sizes only.

†† Optional Silicone filling available with 2-1/2" and 6" gauge case sizes, and 4-1/2" gauge case size with Aluminum case and standard shatter-resistant acrylic lens only.


EXAMPLE

EXAMPLE	25-11	1	2	-	P75	-	A	2	P	-	1
Gauge size & series	2-1/2" 1100 Series										
Connection location.....	Back										
Connection size	1/4" NPT female										
Pressure range	0 psid to 75 psid										
Sensor housing material	Aluminum, black										
O-ring material.....	FKM										
Case material	Engineered plastic										
Lens	Shatter-resistant acrylic										


Differential Pressure Gauges

Dimensions


2-1/2 "Gauge (<25 psid)

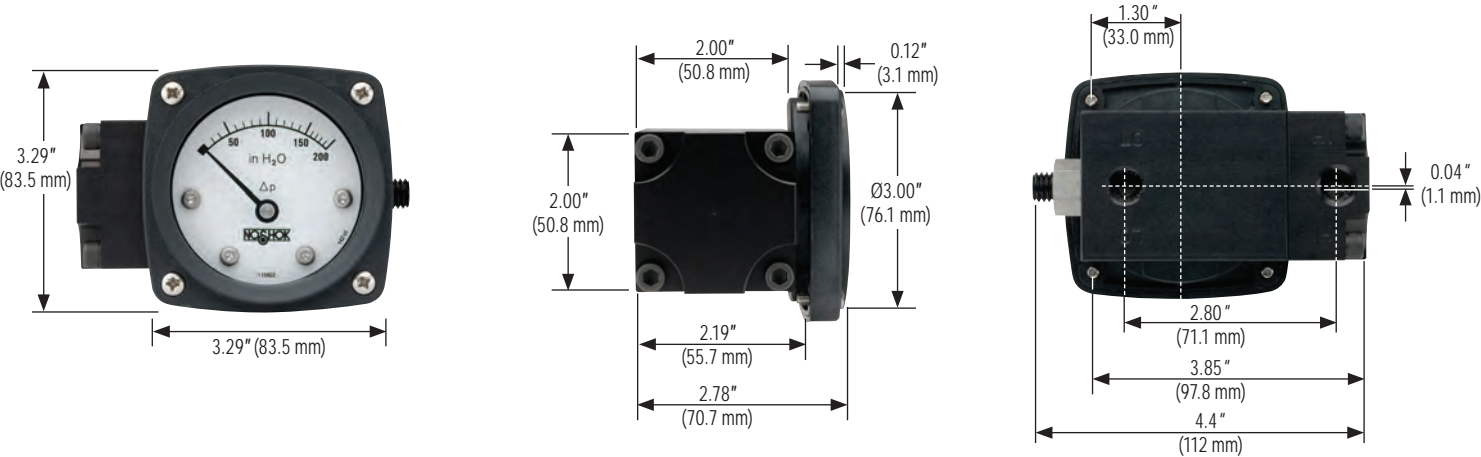


4-1/2 "Gauge (<25 psid)

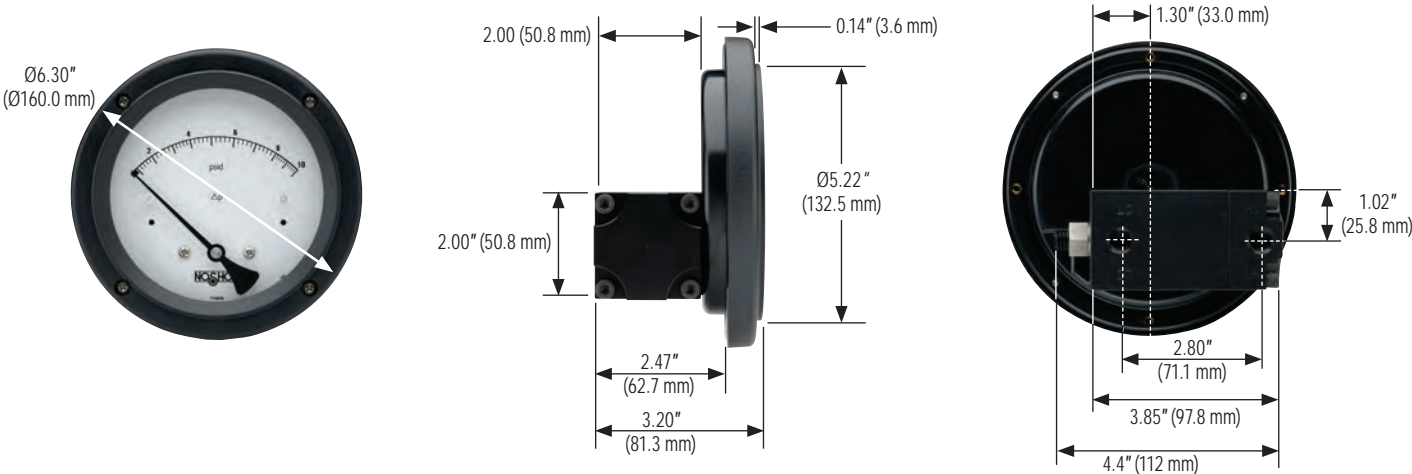


6 "Gauge (<25 psid)

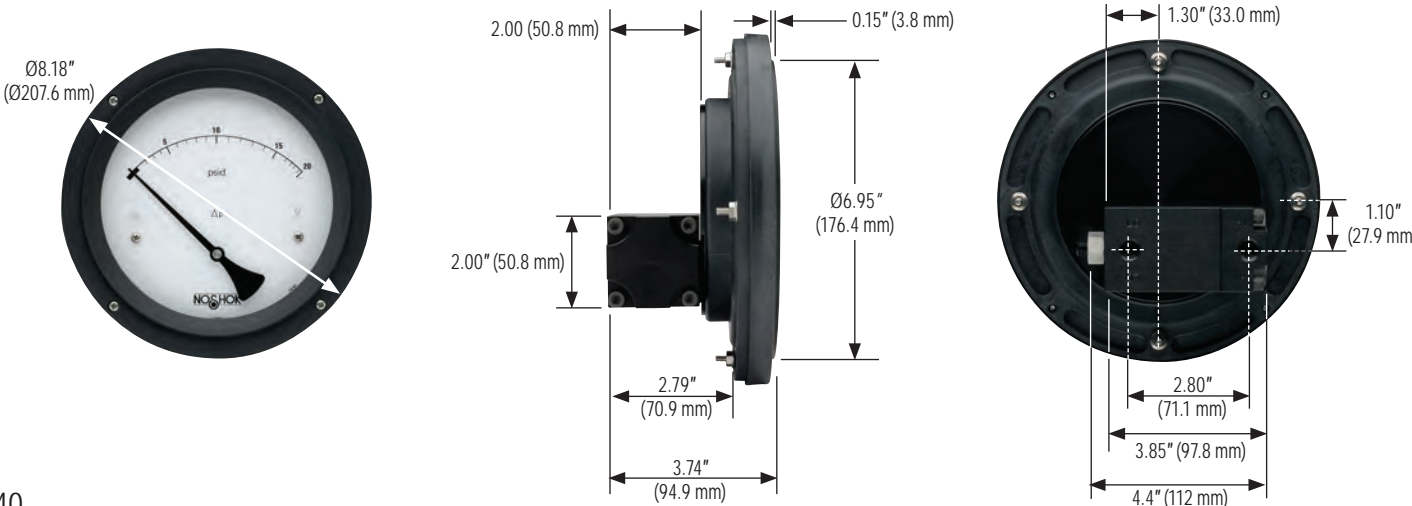


2-1/2" Gauge (≥25 psid)

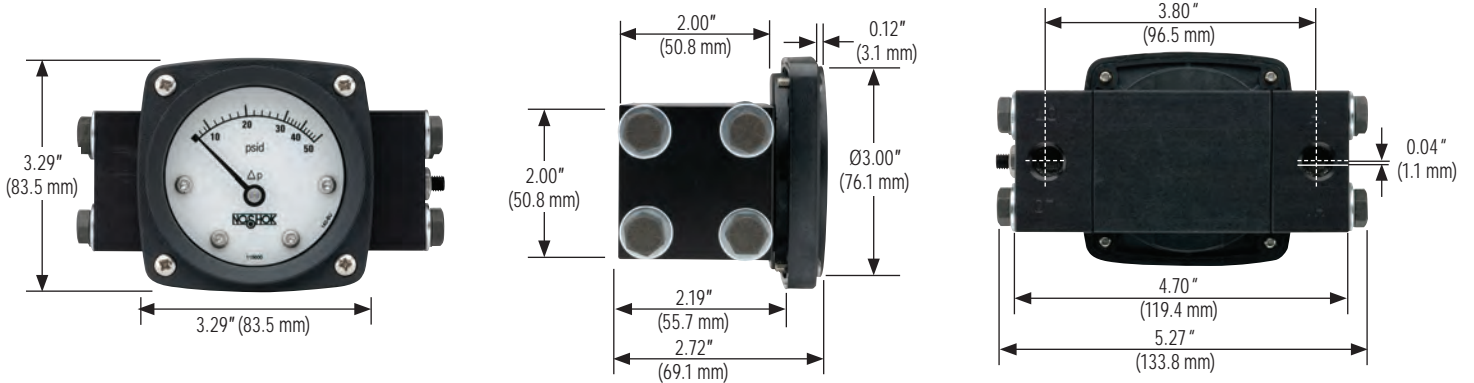

4-1/2" Gauge (≥25 psid)

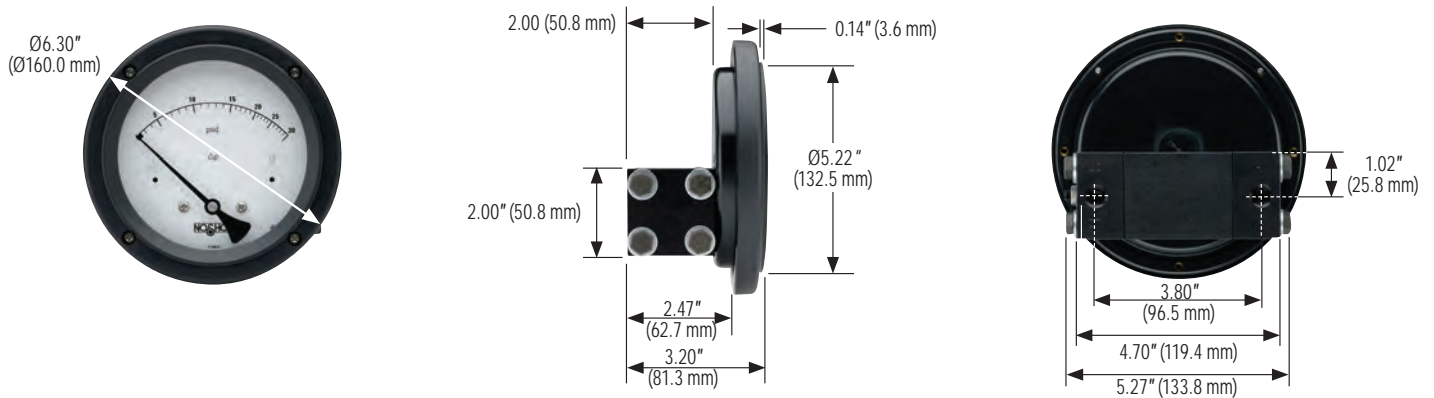

6" Gauge (≥25 psid)

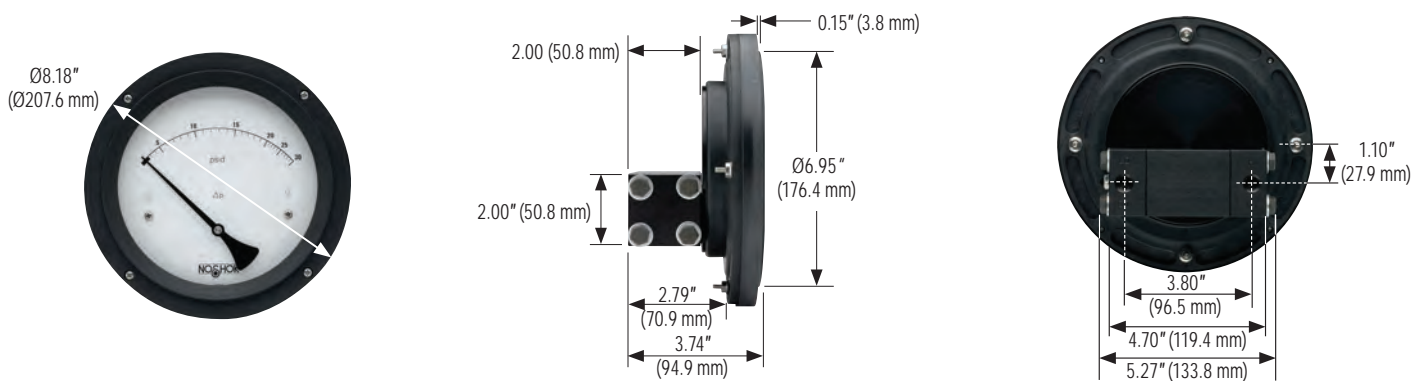

4-20 mA Transmitter in NEMA 4x Enclosure



Single Switch in NEMA 4x Enclosure





10 SERIES

- 3/4" clamp, dry gauge
- Ranges from 0 psig to 30 psig through 0 psig to 600 psig
- 2" gauge size
- Electropolished Stainless Steel case
- 316 Stainless Steel wetted parts
- Meets current standards for 3A
- C.I.P, S.I.P and Autoclave (only dry gauges are recommended for Autoclave)

APPLICATIONS

- Food & beverage processing
- Pasteurization systems
- Pharmaceutical
- Medical

SPECIFICATIONS

Pressure ranges	0 psig to 30 psig through 0 psig to 600 psig
Accuracy	±2.5% full scale
Temperature ranges	Media -40 °F to 300 °F (-40 °C to 150 °C) Ambient 25 °F to 140 °F (-4 °C to 60 °C) Storage 25 °F to 140 °F (-4 °C to 60 °C)
Measuring element	316 Stainless Steel Bourdon tube
Connection	3/4" Sanitary Clamp, 316L Stainless Steel Diaphragm 316L Stainless Steel, electropolished to 32 µin Ra or better
Case	2" Electropolished 304 Stainless Steel
Cover ring	Electropolished 304 Stainless Steel
Lens*	Polycarbonate
Pointer	Balanced Aluminum, black finish
Dial	Aluminum, white background, black print
Movement	Stainless Steel
Fill liquid	Glycerin, USP Grade

*Note: Autoclave requires the addition of optional laminated safety glass lens

Diaphragm seal must be installed facing downward or in a vertical position for drainability.
Do not install diaphragm seal facing in an upward position.



ORDERING INFORMATION			
SERIES	100	10 Series fractional	
CLAMP SIZE	06	3/4"	
FILL LIQUID	1	Glycerin	Other food grade quality fill fluids available – please consult factory
GAUGE SIZE	20	2"	
PRESSURE RANGES	43	0 psig to 30 psig	55 0 psig to 160 psig
	46	0 psig to 60 psig	58 0 psig to 200 psig
	49	0 psig to 100 psig	61 0 psig to 300 psig
OPTIONS	0	None	
	3	Safety Glass Lens (Required for Autoclave applications)	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

EXAMPLE

100 - 06 - 1 - 20 - 43 - 3

Series 10 Series fractional

Clamp size 3/4" Sanitary


Fill liquid Glycerin (USP food grade)

Gauge size 2"

Pressure range 0 psig to 30 psig

Option Safety Glass Lens

2" Gauge with 3/4" ASME-BPE Sanitary Clamp Connection

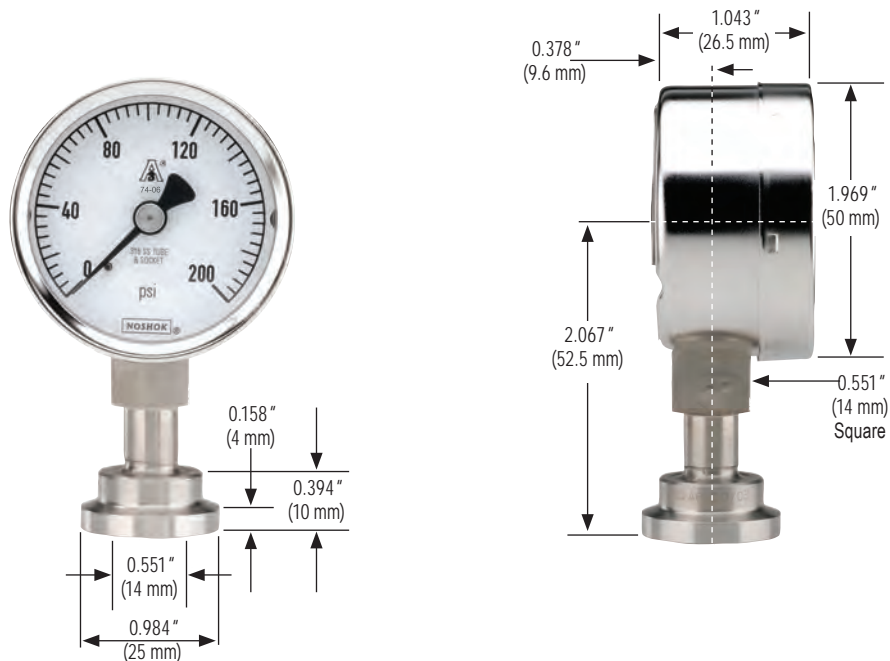



APPLICATIONS

- Food & beverage processing
- Pasteurization systems
- Pharmaceutical
- Medical

10 SERIES

- 1-1/2" and 2" clamp, fillable dry or liquid-filled gauge
- Ranges from -30 inHg to 0 psig through 0 psig to 600 psig
- 2-1/2" and 4" gauge sizes
- Electropolished Stainless Steel case
- 316 Stainless Steel wetted parts
- Meets current standards for 3A
- C.I.P, S.I.P and Autoclave (only dry gauges are recommended for Autoclave)

SPECIFICATIONS

Pressure ranges	-30 inHg to 0 psig through 0 to 600 psig
Accuracy	2-1/2" gauge $\pm 1.6\%$ full scale 4" gauge $\pm 1.0\%$ full scale
Temperature ranges	Media -40 °F to 300 °F (-40 °C to 150 °C) Ambient 25 °F to 140 °F (-4 °C to 60 °C) Storage 25 °F to 140 °F (-4 °C to 60 °C)
Measuring element	316 Stainless Steel "C" tube
Connection	1-1/2" or 2" ASME-BPE Sanitary Clamp, 316L Stainless Steel Diaphragm 316L Stainless Steel, electropolished to 32 μ in Ra or better
Case	Electropolished 304 Stainless Steel
Bayonet ring	Electropolished 304 Stainless Steel
Lens	Safety glass
Pointer	Balanced Aluminum, black finish
Dial	Aluminum, white background, black print
Movement	Stainless Steel
Fill liquid	Glycerin, USP Grade

*Note: Autoclave requires the addition of optional laminated safety glass lens

Diaphragm seal must be installed facing downward or in a vertical position for drainability.
Do not install diaphragm seal facing in an upward position.



ORDERING INFORMATION				
SERIES	100	10 Series heavy-duty, bottom connected	101	10 Series heavy-duty, back connected
CLAMP SIZES	12	1-1/2"	16	2"
FILL LIQUID	1	Glycerin	Other food grade quality fill fluids available – please consult factory	
GAUGE SIZES	25	2-1/2"	40	4"
PRESSURE RANGES	01	-30 inHg to 0 psig *	16	-30 inHg to 160 psig
	04	-30 inHg to 15 psig	19	-30 inHg to 200 psig
	07	-30 inHg to 30 psig	22	-30 inHg to 300 psig
	10	-30 inHg to 60 psig	40	0 psig to 15 psig *
	13	-30 inHg to 100 psig	43	0 psig to 30 psig
GAUGE FILLS	46	0 psig to 60 psig	64	0 psig to 400 psig
	49	0 psig to 100 psig	70	0 psig to 600 psig
GAUGE OPTIONS	55	0 psig to 160 psig	58	0 psig to 200 psig
	61	0 psig to 300 psig		
GAUGE FILLS	0	None	1	Glycerin
		(All food grade quality fill fluids)	2	Silicone
GAUGE FILLS			3	Mineral oil
GAUGE OPTIONS	0	None	1	Max. Indicating Pointer
			2	Adjustable Pointer **

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Not available on 4" gauge and 1-1/2" ASME-BPE Sanitary Clamp


** Not available on 2-1/2" gauge

EXAMPLE


Series 10 Series heavy-duty
Clamp size..... 1-1/2" ASME-BPE Sanitary
Fill liquid Glycerin (USP food grade)
Gauge size 2-1/2"
Pressure range..... 0 psig to 160 psig
Gauge fill Glycerin
Option..... Maximum Indicating Pointer

100 - 12 - 1 - 25 - 55 - 1 - 1


4 "Gauge with 2 "ASME-BPE Sanitary Clamp Connection

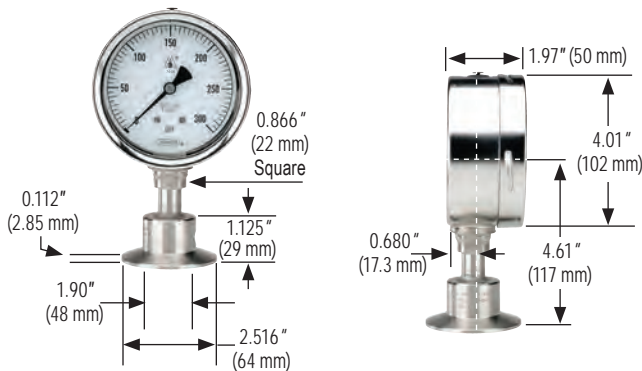


4 "Gauge with 1-1/2 "ASME-BPE Sanitary Clamp Connection

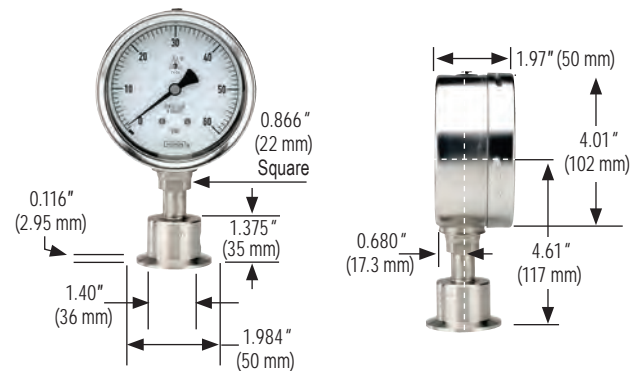

2-1/2 "Gauge with 2 "ASME-BPE Sanitary Clamp Connection

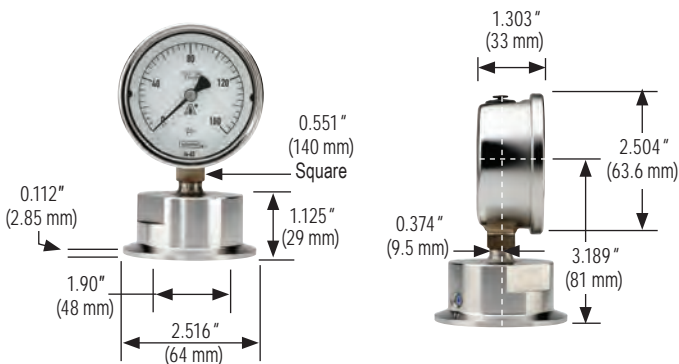

2-1/2 "Gauge with 1-1/2 "ASME-BPE Sanitary Clamp Connection

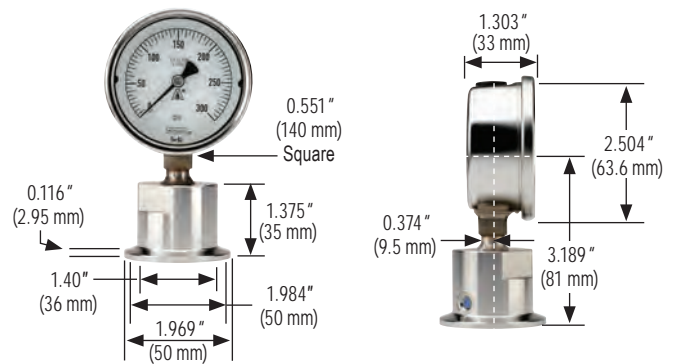

Dial Indicating Gauge Options & Accessories

PANEL MOUNTING FLANGES

- Many panel mounting options are available and can be installed in the field
- Options include:
 - Brass Front Flanges (BFF)
 - Black Painted Steel Front Flanges (BLFF)
 - Chrome Front Flanges (CFF)
 - Stainless Steel Front Flanges (SSFF)
 - Chrome Triangular Bezel with U-Clamp (CBU)
 - Black Painted Steel Triangular Bezels with U-Clamp (BBU-Clamp)
 - Stainless Steel Narrow Bezel Front Flanges (SSBU)
 - Panel Mount Clamps (PMC)
- Chrome-plated Steel Adapter Rings (AR) are available in conjunction with several of these flanges to adapt to oversized panel cut outs, including:
 - Stainless Steel Flange Rings (SSFR)
 - Chrome-Plated Steel Flange Rings (CFR)
 - Black or Chrome Panel Mount Rings (BPMR & CPMR)
- Rear Flanges (RF) for front of panel mounting are also available as a factory installed option on some series



Panel Mount Clamp
20-110 PMC



Chrome Triangular Bezel
with U-Clamp

CASES & COVER RINGS

- The following cases and cover rings are available on many NOSHOK gauges as production options:
 - Black painted Steel (BCR)
 - Chrome-plated Steel (CCR)
 - 304 Stainless Steel (SSCR)
- Some NOSHOK gauges are also available with a solid front, safety case

LENSES

- A variety of lens options are available on many NOSHOK gauges as a production option:
 - Instrument glass lenses
 - Laminated safety glass lenses
 - Acrylic lenses
 - Homalite lenses (resistant to many industrial solvents)
 - A Steel or Stainless case and cover ring may be required when other than acrylic lenses are utilized



Cases and Cover Rings

MAXIMUM INDICATING POINTERS (MIP)

- An invaluable tool for identifying pressure spikes in a system
- Extremely helpful during system start up and troubleshooting
- MIPs add an additional $\pm 1\%$ error to the gauge because of the increased load on the Bourdon tube
- On ranges of 60 psi and lower, MIPs may double the allowed error of the gauge



Maximum Indicating Pointer

See the Gauges Accessories & Options Charts on pgs. 50-53 for availability on specific gauges

SET POINTERS (SP)

- Used to identify an operating minimum or maximum pressure or vacuum value
- Set pointers are available on many NOSHOK gauges

RUBBER CASE PROTECTORS (RCP)

- Ideal for gauges that are subjected to direct physical shock
- 2-1/2" covers are blue and 4" covers are black

ORIFICES

- Press-fit or threaded orifices in Brass or 316 Stainless Steel are available on all NOSHOK pressure gauges
- Available with I.D.'s from 0.004" to 0.032" depending on the specific NOSHOK gauge
- Used in a gauge to restrict the flow of rapidly increasing and decreasing pressures, reducing the immediate effect of pulsations and pressure spikes
- Recommended for all dynamic applications

RECALIBRATORS & ADJUSTABLE POINTERS

- This option gives the user the capability of resetting the pointer by an adjustment screw accessible through the dial, or by a gear located on the pointer

OVERPRESSURE PROTECTION

- Overpressure protection of 3 times up to 10 times of the dial range is available on some NOSHOK gauges as a production option

AMMONIA REFRIGERATION GAUGES

- Ammonia and refrigeration gauges with dials reading in both pressure and temperature are available in 400/500 Series 2-1/2" and 4" sizes
- Refrigeration gauges with dials reading in pressure and temperature are available in 300, 400 and 500 Series for R-12 and R-22

LIQUID FILLING OPTIONS

- Many NOSHOK gauges are available with liquid filling options
- Standard fill is Glycerin
- Optional fill liquids include Dow Corning 200® Silicone and Halocarbon®

SPECIAL CONNECTIONS

- Available on most NOSHOK gauges
- Some examples include:
 - Metric threads
 - Female threads
 - Straight threads (flare or swivel type)
 - Special o-ring connections
- Please contact us with your requirements for prices, availability and minimum quantities

REID VAPOR TEST GAUGES

- Configuration includes a handle, special dial and special pressure port
- Available in 600/700 Series gauges with pressure ranges of 0 to 5 psi, 0 to 15 psi and 0 to 30 psi



Set Pointers



Rubber Case Protectors




Ammonia Gauges

Dial Indicating Gauge Options & Accessories

METRIC DIALS & CUSTOMIZED SPECIAL DIALS

- Dual scale metric dials in psi/bar, psi/kPa and psi/kg/cm² are available on many NOSHOK gauges
- Other scales are available for specific sizes and ranges, such as single scale bar and kPa, refrigerant scales and altitude scales
- Please consult the factory for availability
- Customized special dials such as non-standard metric scale, tons of ram, lbs. of force, etc. are available in small quantities (as few as one piece) on some NOSHOK gauges

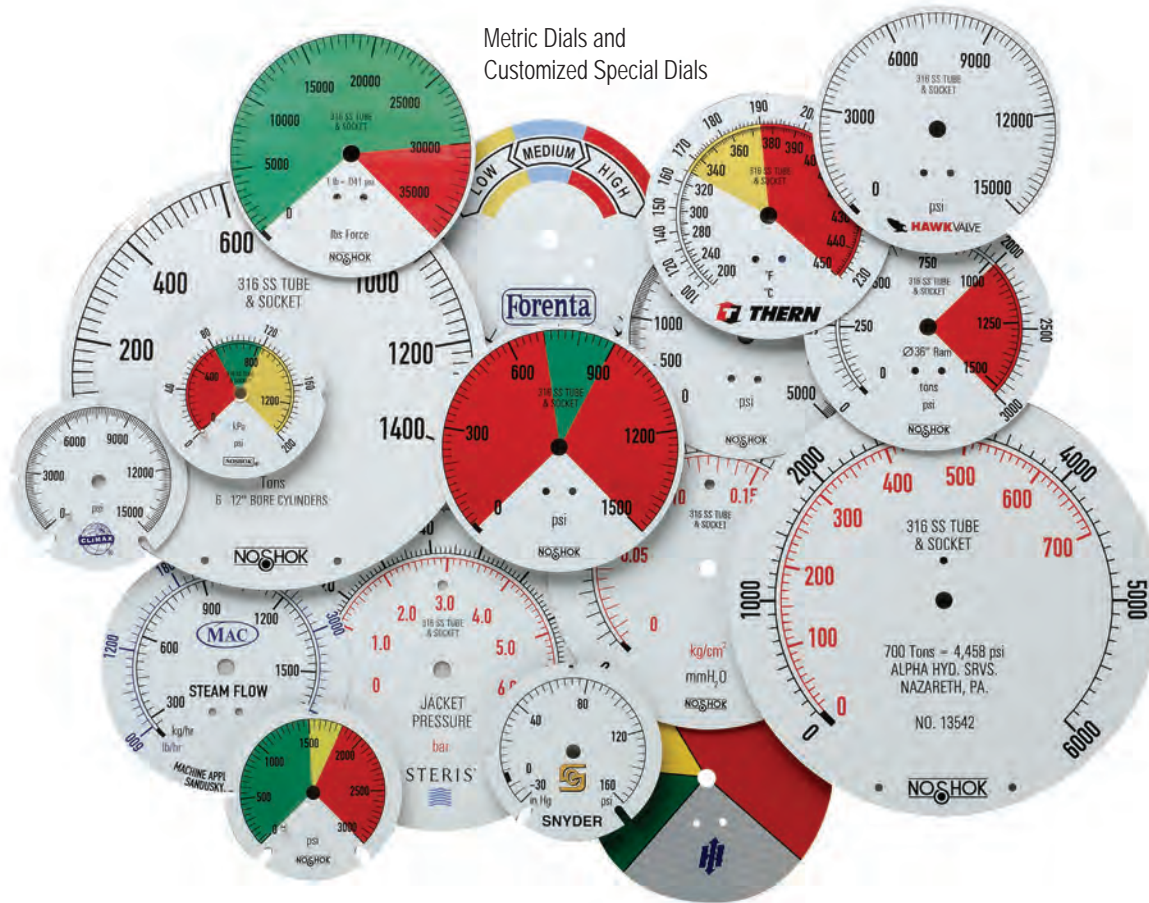

CERTIFIED CALIBRATION

- Available on all NOSHOK gauges
- Certified calibration provides the user with a serial numbered gauge along with a calibration sheet against a primary pressure standard
- Traceable to the National Institute of Standards and Technology



MAGNETIC SPRING CONTACT SWITCH (MSCS)

- An excellent choice when an accurate pressure switch is required in addition to a reliable pressure gauge
- Fully adjustable by the user
- These switches are actuated by the pressure gauge pointer to provide accurate field adjustment
- A removable adjustment key makes them tamper-proof
- They operate with an extremely broad power supply, AC or DC up to 250V max. (30W 50 VA), allowing them to be used virtually anywhere in the world in addition to very remote applications with only DC battery pack power available
- Standard units consist of (2) two magnetic spring switches; either one or both switches may be used:
 - Switch (1) one is normally closed
 - Switch (2) two is normally open with operation referenced on clockwise pointer motion
- Magnetic spring contact switches are available as a factory installed option on 40-400 Series and 40-410 Series
- The lowest full scale pressure range this switch may be used on is 0 psi to 60 psi because of the increased load on the pointer and Bourdon tube
- A mating 4-pin connector with 5' of 4-wire and color coded shielded cable is standard

APPLICATIONS

- Air compressors
- Gas compressors
- Hydraulic and pneumatic circuitry
- Die-cast machinery
- Plastic injection molding machinery

SPECIFICATIONS	
Type of power	A.C. or D.C. 24 to 250V max
Maximum amps	1.0 A
Maximum switching capacity	30 W/50 VA
Gauge accuracy	Add an additional ±2%
Minimum magnet holding force	1g
Contact pin material	Silver Tungsten
Ambient temperature limitation	0 °F to 140 °F (-18 °C to 61 °C)
Minimum full scale pressure range	0-60 psi

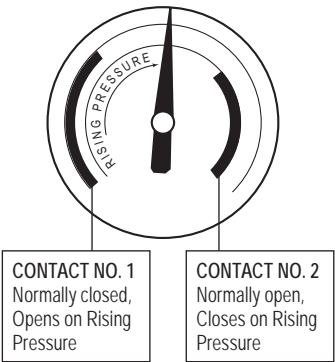

WIRING AND TERMINAL LOCATION

1. Contact Switch No. 1; Red or Black
2. Contact Switch No. 2; Blue
3. Power; Green or Brown
4. Ground; Yellow/Green Stripe



40-400 Series Gauge with
Magnetic Spring Contact Switch












Options & Accessories by Gauge Series

100 SERIES ABS & Steel CASE, DRY PRESSURE GAUGE ACCESSORIES

— = Option/accessory is available

C = Consult factory for availability

STD = Standard stock series specification

MODEL NO.	15-100	15-110	15-120	20-100	20-110	20-120	20-148	25-100	25-110	25-120	40-100
CONNECTION											
Black Steel Case (BSC)	C		STD	C	C	STD	—			STD	
Chrome Case (CRC)	C		—	C	C	—	—			—	—
Flat Sided ABS Case (FAC)	—		—	—		—	—	—		—	—
Stainless Steel Case (SSC)	C		—	C	C	—	—			—	—
Silicone Dampened Movement (SDM)	C	C	C	C	C	C	C	C	C	C	C
Glass Lens (GL)*	C	N/C		C	N/C		—	N/C	N/C		N/C
Homalite Lens (HL)*	—	—		—	—		—	—	—		—
Polycarbonate Lens (LL)*	—	—	—	—	—	—	—			—	—
Maximum Indicating Pointer (MIP)	—	—	—	—	—	—	—	C	C	—	—
Red Set Pointer (SP)**		C	C	C		C				C	—
Safety Glass Lens (SG)*	—	—	—	—	—	—	—			—	
Black Front Flange (BLFF) ABS Case	—		—	—		—	—	—		—	—
Chrome Front Flange (CFF) ABS Case	—		—	—		—	—	—		—	—
Chrome Front Flange (SCFF) Steel Case	C	C	—	C	C	—	—			—	
Black Front Flange (SBFF) Steel Case	C	C	—	C	C	—	—			—	
Black Rear Flange (BLRF)	—	—	—	—	—	—	—		—	—	
Black Cover Ring (BCR)**	C		—	C	C	—	—			—	
Stainless Steel Cover Ring (SSCR)**	C		—	C	C	—	—			—	—
Chrome Cover Ring (CCR)**	C		—	C	C	—	—			—	
Polished Stainless Steel Bezel (SSB)	—		STD	—		STD	—	—		STD	—
Chrome Adaptor Ring (AR)	—			—			—	—			—
Panel Mount Clamp (PMC)	—		STD	—		STD	—	—		STD	—
Rubber Case Protectors (RCP)	—	—	—	—	—	—	—			—	
10-32-UNF-2B (10-32)											
Orifice - Brass Press Fit Sintered, 20 Micron (CPO)											
Orifice - Brass Press Fit 0.1mm (BP1)											
Orifice - Brass Press Fit 0.3mm (BP3)											
Orifice - Brass Press Fit 0.8mm (BP8)											
Laser Marking (LM)											
Stainless Steel Tagging (ST)											

STANDARD ORIFICE FOR 100 SERIES GAUGE IS 0.3 MM PRESS FIT, UNLESS OTHERWISE SPECIFIED.





* A Steel, Stainless or chrome case & cover ring must be additionally ordered when lenses other than acrylic are utilized on all 100 Series.

** Only 110 Series require a Steel, Stainless or chrome case & cover ring to be additionally ordered when utilizing a set pointer or cover ring. Please consult factory when a set pointer is to be utilized on a 120 Series.

Consult factory for additional non-stock and special accessory availability.

200 SERIES LOW PRESSURE DIAPHRAGM GAUGE ACCESSORIES

- = Option/accessory is available
C = Consult factory for availability
STD = Standard stock series specification

MODEL NO.	25-200	25-210	25-224	40-200
CONNECTION				
Stainless Steel Case (SSC)			—	STD
Glass Lens (GL)*			—	STD
Safety Glass Lens (SG)*			—	
Plexiglass Lens (PL)			—	
Recalibrator Lens (RL)			—	—
Red Set Pointer (SP)				
Maximum Indicating Pointer (MIP)				C
Black Front Flange (BLFF)	—		—	
304SS Front Flange (SSFF)	—	—	—	
Chrome Front Flange (CFF)	—		—	—
Black Rear Flange (BLRF)		—	—	—
304SS Rear Flange (SSRF)	—	—	—	
Black Cover Ring (BCR)			—	—
Stainless Steel Cover Ring (SSCR)			—	STD
Chrome Cover Ring (CCR)			—	—
Black Bezel w/U-Clamp (BBU)	—		—	—
SS Bezel w/U-Clamp (SSBU)	—		—	—
Rubber Case Protectors (RCP)			—	
10-32-UNF-2B (10-32)				
Orifice - Brass Press Fit 0.3mm (BP3)	—			
Orifice - Brass Threaded 0.3mm (BT3)				
Laser Marking (LM)				
Stainless Steel Tagging (ST)				





STANDARD ORIFICE FOR 200 SERIES GAUGE IS 0.3 MM PRESS FIT, UNLESS OTHERWISE SPECIFIED.

* A Steel, Stainless or chrome cover ring must be additionally ordered when lenses other than acrylic are utilized on all 2-1/2" 200 Series.

Consult factory for additional non-stock and special accessory availability.

300 SERIES Brass CASE LIQUID-FILLED GAUGE ACCESSORIES

- = Option/accessory is available

MODEL NO.	25-300	25-310	40-300	40-310
CONNECTION				
Maximum Indicating Pointer (MIP)			—	—
Polycarbonate Lens (LL)	—	—		
Glass Lens Overlay (GLO)			—	—
Safety Glass Overlay (SGO)			—	—
Safety Glass (SG)	—	—		
Chrome Front Flange (CFF)				
Chrome Front Flange w/o Holes (CFFN)				
Brass Front Flange (BFF)				
Black Front Flange (BLFF)	—	—		
304SS Rear Flange (SSRF)	—	—		
Rear Flange (RF)			—	—
Chrome Cover Ring (CCR)				—
Chrome Bezel w/U-Clamp (CBU)	—		—	
Adaptor Ring (AR)	—		—	—
Increased Accuracy from 1.5% to 1.0% (IA)			—	—
Increased Accuracy from 1.0% to 0.5% (IA)	—	—		
SAE J1926-3:7/16-20 Adjustable Connection (SST)*				
10-32-UNF-2B (10-32)				
Orifice - Brass Threaded 0.3mm (BT3)				
Orifice - Brass Threaded 0.4mm (BT4)				
Orifice - Brass Threaded 0.8mm (BT8)				
Rubber Case Protectors (RCP)				
Laser Marking (LM)				
Stainless Steel Tagging (ST)				

STANDARD ORIFICE FOR 300 SERIES GAUGE IS 0.8 MM THREADED, UNLESS OTHERWISE SPECIFIED.

* Includes FKM o-ring. Consult factory for availability.

Consult factory for additional non-stock and special accessory availability.









Options & Accessories by Gauge Series

400/500 SERIES ALL Stainless Steel PRESSURE GAUGES DRY, LIQUID & AMMONIA GAUGE ACCESSORIES

— = Option/accessory is available

C = Consult factory for availability

STD = Standard stock series specification





MODEL NO.	15-401	15-411	25-400	25-410	40-400	40-410	60-400	60-410
			25-500	25-510	40-500	40-510	60-500	60-510
CONNECTION								
Adjustable Pointer (AP)	—	—	—	—			STD	STD
Safety Glass Lens (SG)	—	—					STD	STD
Maximum Indicating Pointer (MIP)	—	—						
Red Set Pointer (SP)	—	—						
Magnetic Spring Contact, 4" 400 & 410 (MSCS)	—	—	—	—			—	—
304 SS Front Flange (SSFF)	—	—	—					
304 SS Rear Flange (SSRF)	—	—	C	C				
SS Bezel w/U-Clamp (SSBU)	—	—	—	—	—		—	
Flange Ring 304SS (SSFR)	—	—	—		—	—	—	—
304SS Panel Mount Clamp (SPMC)	—	—	—		—	—	—	—
Steel Panel Mount Clamp (PMC)	—	—	—		—	—	—	—
Increased Accuracy from 1.5% to 1.0% (IA)	—	—						
Increased Accuracy from 1.0% to 0.5% (IA)	—	—						
10-32-UNF-2B (10-32)								
Orifice - 316SS Threaded 0.8mm (ST8)								
Orifice - 316SS Threaded 0.5mm (ST5)								
Rubber Case Protectors (RCP)	—	—				—	—	—
Laser Marking (LM)								
Stainless Steel Tagging (ST)								

STANDARD ORIFICE FOR 400/500 SERIES GAUGE IS 0.8 MM THREADED, UNLESS OTHERWISE SPECIFIED.

Consult factory for additional non-stock and special accessory availability.

600/700 SERIES PROCESS GAUGE ACCESSORIES

— = Option/accessory is available


MODEL NO.	45-640	45-740	45-660	45-760
CONNECTION				
Safety Glass Lens (SG)				
Glass Lens (GL)				
Maximum Indicating Pointer (MIP)				
Overload Stop (OS)				
10-32-UNF-2B (10-32)				
Orifice - Brass Press Fit 0.3mm (BP3)		—		—
Orifice - Brass Threaded 0.8mm (BT8)		—		—
Orifice - 316SS Threaded 0.8mm (ST8)	—		—	
Laser Marking (LM)				
Stainless Steel Tagging (ST)				

STANDARD ORIFICE FOR 600/700 SERIES GAUGE IS 0.8 MM THREADED, UNLESS OTHERWISE SPECIFIED.

Consult factory for additional non-stock and special accessory availability.

800 SERIES PRECISION TEST GAUGE ACCESSORIES

— = Option/accessory is available

MODEL NO.	60-800
CONNECTION	
304 SS Front Flange (SSFF)	
304 SS Rear Flange (SSRF)	
10-32-UNF-2B (10-32)	
Orifice - Brass Press Fit 0.3mm (BP3)	
Orifice - Brass Threaded 0.8mm (BT8)	
Laser Marking (LM)	
Stainless Steel Tagging (ST)	
Carrying Case (GC)	

STANDARD ORIFICE FOR 800 SERIES GAUGE IS 0.8 MM THREADED, UNLESS OTHERWISE SPECIFIED.








Consult factory for additional non-stock and special accessory availability.

900 SERIES ABS & Stainless Steel LIQUID FILLED PRESSURE GAUGE ACCESSORIES

— = Option/accessory is available

C = Consult factory for availability

STD = Standard stock series specification

MODEL NO.	15-910	25-900	25-910	25-901	25-911	40-901	40-911
CONNECTION							
Adjustable Pointer (AP)	—	—	—	—	—		
Maximum Indicating Pointer (MIP)	—	—	—				
Red Set Pointer (SP)	—	—	—				
Safety Glass Lens (SG)	—	—	—				
Magnetic Spring Contact Switch 4" 901 & 911 Dry (MSCS)	—	—	—	—	—		
Black Front Flange (BLFF)	—	—		—	—	—	—
304 SS Front Flange (SSFF)	—	—	—	—			
304 SS Rear Flange (SSRF)	—	—	—	—	—		
304 SS Polished Flange Ring (SSFR)	—	—	—	—		—	—
SS Bezel w/U-Clamp (SSBU)	—	—	—	—	—	—	
304SS Panel Mount Clamp (SPMC)	—	—	—	—		—	—
Steel Panel Mount Clamp (PMC)	—	—		—		—	—
Increased Accuracy from 1.5% to 1.0% (IA)	—	—	—			—	—
Increased Accuracy from 1.0% to 0.5% (IA)	—	—	—	—	—		
SAE J1926-3:7/16-20 Adjustable Connection (SST)* †	—						
1/4" NPT x G1/4 Adaptor (1/4-NPT-MXG1/4-F-BR)							
G1/4 Sealing Washer (G1/4-SEALING-WASHER)							
10-32-UNF-2B (10-32)							
Orifice - Brass Press Fit 0.3mm (BP3)							
Orifice - Brass Threaded 0.5mm (BT5)						—	—
Orifice - Brass Threaded 0.8mm (BT8)	—	—	—	—	—		
Rubber Case Protectors (RCP)	—	—	—				
Dry Out Charge (DRY)	—	—	—				
Laser Marking (LM)							
Stainless Steel Tagging (ST)							

STANDARD ORIFICE FOR 900 SERIES GAUGE IS 0.3 MM PRESS FIT, UNLESS OTHERWISE SPECIFIED.

* Includes FKM o-ring. Consult factory for availability.

** For ranges 60 psi and above.

Consult factory for additional non-stock and special accessory availability.

GAUGE FILL OPTIONS

SERIES NO.	VOLUME	SILICONE	HALOCARBON®	-40° SERVICE	MINERAL OIL
300 SERIES	OZ	D.C. 200	4.2 OIL	86.5 : 13.5 GLYCERIN: H2O (d)	LIGHT VISCOSITY
25-300/25-310	2.0	—	—	—	—
40-300/40-310	6.5	—	—	—	—
500 SERIES					
25-500/25-510	2.0	—	—	—	—
40-500/40-510	8.5	—	—	—	—
60-500/60-510	31.0	—	—	—	—
600/700 SERIES					
45-660/45-760	14.0	—	—	—	—
900 SERIES					
25-900/25-910	2.0	C	C	—	C
25-901/25-911	2.0	C	C	—	C
40-901/40-011	8.5	—	—	—	—

Dial Indicating Gauge Accuracy/Standard Dial Configuration

300 Series Gauges: 4"

Applies to:
400/500 Series Gauges: 4" and 6"

900 Series Gauges: 4"

ACCURACY: $\pm 1.0\%$ full scale											
Primary Scale			Secondary Scales								
Dial Range	Figure	Graduation	kPa	Figure	Graduation	kg/cm ²	Figure	Graduation	bar	Figure	Graduation
-30 inHg to 0 psi	-5 inHg	-0.5 inHg	-100 kPa to 0 kPa	-20 kPa	-2 kPa	-1.02 kg/cm ² to 0 kg/cm ²	-0.2 kg/cm ²	-0.02 kg/cm ²	-1 bar to 0 bar	-0.2 bar	-0.02 bar
-30 inHg to 15 psi	-10 inHg	-1 inHg	-100 kPa to 100 kPa	-50 kPa	-5 kPa	-1 kg/cm ² to 1.05 kg/cm ²	-0.5 kg/cm ²	-0.05 kg/cm ²	-1 bar to 1 bar	-0.5 bar	-0.05 bar
-30 inHg to 30 psi	-10 inHg	-1 inHg	-100 kPa to 205 kPa	-50 kPa	-5 kPa	-1 kg/cm ² to 2.10 kg/cm ²	-1 kg/cm ²	-0.1 kg/cm ²	-1 bar to 2.05 bar	-0.5 bar	-0.05 bar
-30 inHg to 60 psi	-30 inHg	-2 inHg	-100 kPa to 100 kPa	-100 kPa	-10 kPa	-1 kg/cm ² to 4.2 kg/cm ²	-1 kg/cm ²	-0.1 kg/cm ²	-1 bar to 4.1 bar	-1 bar	.01 bar
-30 inHg to 100 psi	-30 inHg	-5 inHg	-100 kPa to 680 kPa	-100 kPa	-20 kPa	-1 kg/cm ² to 7 kg/cm ²	-1 kg/cm ²	-0.2 kg/cm ²	-1 bar to 6.8 bar	-1 bar	-0.2 bar
-30 inHg to 160 psi	-30 inHg	-5 inHg	-100 kPa to 1,100 kPa	-100 kPa	-20 kPa	-1 kg/cm ² to 11.2 kg/cm ²	-1 kg/cm ²	-0.2 kg/cm ²	-1 bar to 11 bar	-1 bar	-0.2 bar
-30 inHg to 200 psi	-30 inHg	-5 inHg	-100 kPa to 1,360 kPa	-100 kPa	-20 kPa	-1 kg/cm ² to 14 kg/cm ²	-1 kg/cm ²	-0.2 kg/cm ²	-1 bar to 13.6 bar	-1 bar	-0.2 bar
-30 inHg to 300 psi	-30 inHg	-10 inHg	-100 kPa to 2,050 kPa	-100 kPa	-50 kPa	-1 kg/cm ² to 21 kg/cm ²	-1 kg/cm ²	-0.5 kg/cm ²	-1 bar to 20.5 bar	-1 bar	-0.5 bar
0 psi to 15 psi	3 psi	0.2 psi	0 kPa to 102 kPa	30 kPa	2 kPa	0 kg/cm ² to 1.04 kg/cm ²	0.3 kg/cm ²	0.04 kg/cm ²	0 bar to 1.02 bar	0.3 bar	0.02 bar
0 psi to 30 psi	5 psi	0.5 psi	0 kPa to 205 kPa	50 kPa	5 kPa	0 kg/cm ² to 2.1 kg/cm ²	0.5 kg/cm ²	0.1 kg/cm ²	0 bar to 2.05 bar	0.5 bar	0.05 bar
0 psi to 60 psi	10 psi	1 psi	0 kPa to 410 kPa	100 kPa	10 kPa	0 kg/cm ² to 4.2 kg/cm ²	1 kg/cm ²	0.1 kg/cm ²	0 bar to 4.1 bar	1 bar	0.1 bar
0 psi to 100 psi	20 psi	2 psi	0 kPa to 680 kPa	200 kPa	20 kPa	0 kg/cm ² to 7 kg/cm ²	2 kg/cm ²	0.2 kg/cm ²	0 bar to 6.8 bar	2 bar	0.2 bar
0 psi to 160 psi	20 psi	2 psi	0 kPa to 1,100 kPa	200 kPa	20 kPa	0 kg/cm ² to 11.2 kg/cm ²	2 kg/cm ²	0.2 kg/cm ²	0 bar to 11 bar	2 bar	0.2 bar
0 psi to 200 psi	40 psi	4 psi	0 kPa to 1,360 kPa	400 kPa	40 kPa	0 kg/cm ² to 14 kg/cm ²	4 kg/cm ²	0.4 kg/cm ²	0 bar to 13.6 bar	4 bar	0.4 bar
0 psi to 300 psi	50 psi	5 psi	0 kPa to 2,050 kPa	500 kPa	50 kPa	0 kg/cm ² to 21 kg/cm ²	5 kg/cm ²	0.5 kg/cm ²	0 bar to 20.5 bar	5 bar	0.5 bar
0 psi to 400 psi	50 psi	5 psi	0 kPa to 2,750 kPa	500 kPa	50 kPa	0 kg/cm ² to 28 kg/cm ²	5 kg/cm ²	0.5 kg/cm ²	0 bar to 27.5 bar	5 bar	0.5 bar
0 psi to 600 psi	100 psi	10 psi	0 kPa to 4,100 kPa	1,000 kPa	100 kPa	0 kg/cm ² to 42 kg/cm ²	10 kg/cm ²	1 kg/cm ²	0 bar to 41 bar	10 bar	1 bar
0 psi to 1,000 psi	200 psi	20 psi	0 kPa to 6,800 kPa	2,000 kPa	200 kPa	0 kg/cm ² to 70 kg/cm ²	20 kg/cm ²	2 kg/cm ²	0 bar to 68 bar	20 bar	2 bar
0 psi to 1,500 psi	300 psi	20 psi	0 kPa to 10,200 kPa	3,000 kPa	200 kPa	0 kg/cm ² to 104 kg/cm ²	30 kg/cm ²	2 kg/cm ²	0 bar to 102 bar	30 bar	2 bar
0 psi to 2,000 psi	400 psi	40 psi	0 kPa to 13,600 kPa	4,000 kPa	400 kPa	0 kg/cm ² to 140 kg/cm ²	40 kg/cm ²	4 kg/cm ²	0 bar to 136 bar	40 bar	4 bar
0 psi to 3,000 psi	500 psi	50 psi	0 kPa to 20,500 kPa	5,000 kPa	500 kPa	0 kg/cm ² to 210 kg/cm ²	50 kg/cm ²	5 kg/cm ²	0 bar to 205 bar	50 bar	5 bar
0 psi to 5,000 psi	1,000 psi	100 psi	0 kPa to 34,000 kPa	10,000 kPa	1,000 kPa	0 kg/cm ² to 350 kg/cm ²	100 kg/cm ²	10 kg/cm ²	0 bar to 340 bar	100 bar	10 bar
0 psi to 6,000 psi	1,000 psi	100 psi	0 kPa to 41,000 kPa	10,000 kPa	1,000 kPa	0 kg/cm ² to 420 kg/cm ²	100 kg/cm ²	10 kg/cm ²	0 bar to 410 bar	100 bar	10 bar
0 psi to 7,500 psi	1,500 psi	100 psi	0 kPa to 51,000 kPa	10,000 kPa	1,000 kPa	0 kg/cm ² to 520 kg/cm ²	100 kg/cm ²	10 kg/cm ²	0 bar to 510 bar	100 bar	10 bar
0 psi to 10,000 psi	2,000 psi	200 psi	0 kPa to 68,000 kPa	20,000 kPa	2,000 kPa	0 kg/cm ² to 700 kg/cm ²	200 kg/cm ²	20 kg/cm ²	0 bar to 680 bar	200 bar	20 bar
0 psi to 15,000 psi	3,000 psi	200 psi	0 kPa to 102,000 kPa	30,000 kPa	2,000 kPa	0 kg/cm ² to 1,040 kg/cm ²	300 kg/cm ²	20 kg/cm ²	0 bar to 1,030 bar	300 bar	20 bar
0 psi to 20,000 psi	4,000 psi	400 psi	0 kPa to 136,000 kPa	40,000 kPa	4,000 kPa	0 kg/cm ² to 1,400 kg/cm ²	400 kg/cm ²	40 kg/cm ²	0 bar to 1,360 bar	400 bar	40 bar
0 psi to 30,000 psi	5,000 psi	500 psi	0 kPa to 205,000 kPa	50,000 kPa	5,000 kPa	0 kg/cm ² to 2,100 kg/cm ²	500 kg/cm ²	50 kg/cm ²	0 bar to 2,050 bar	500 bar	50 bar
0 psi to 40,000 psi	5,000 psi	500 psi	0 kPa to 275,000 kPa	50,000 kPa	5,000 kPa	0 kg/cm ² to 2,800 kg/cm ²	500 kg/cm ²	50 kg/cm ²	0 bar to 2,750 bar	500 bar	50 bar
0 psi to 50,000 psi	10,000 psi	1000 psi	0 kPa to 340,000 kPa	100,000 kPa	10,000 kPa	0 kg/cm ² to 3,500 kg/cm ²	1,000 kg/cm ²	100 kg/cm ²	0 bar to 3,400 bar	1,000 bar	100 bar
0 psi to 60,000 psi	10,000 psi	1000 psi	0 kPa to 410,000 kPa	100,000 kPa	10,000 kPa	0 kg/cm ² to 4,200 kg/cm ²	1,000 kg/cm ²	100 kg/cm ²	0 bar to 4,100 bar	1,000 bar	100 bar
0 psi to 75,000 psi	15,000 psi	1000 psi	0 kPa to 510,000 kPa	100,000 kPa	10,000 kPa	0 kg/cm ² to 5,200 kg/cm ²	1,000 kg/cm ²	100 kg/cm ²	0 bar to 5,100 bar	1,000 bar	100 bar
0 psi to 100,000 psi	20,000 psi	2000 psi	0 kPa to 680,000 kPa	200,000 kPa	20,000 kPa	0 kg/cm ² to 7,000 kg/cm ²	2,000 kg/cm ²	200 kg/cm ²	0 bar to 6,800 bar	2,000 bar	200 bar

Dial Indicating Gauge Accuracy/Standard Dial Configuration

Applies to:

200 Series Gauges: 2-1/2" and 4"

700 Series Gauges (Low Pressure): 4-1/2"

ACCURACY: $\pm 1.0\%$ full scale					
Standard Dial Configurations					
Dial Range	Figure Interval	Graduation Intervals	Dial Range	Figure Interval	Graduation Intervals
-15 inH ₂ O to 0 inH ₂ O	-3 inH ₂ O	-0.2 inH ₂ O	0 oz/in ² to 10 oz/in ²	2 oz/in ²	0.2 oz/in ²
-30 inH ₂ O to 0 inH ₂ O	-5 inH ₂ O	-0.5 inH ₂ O	0 oz/in ² to 15 oz/in ²	3 oz/in ²	0.2 oz/in ²
-60 inH ₂ O to 0 inH ₂ O	-10 inH ₂ O	-1 inH ₂ O	0 oz/in ² to 30 oz/in ²	5 oz/in ²	0.5 oz/in ²
-100 inH ₂ O to 0 inH ₂ O	-20 inH ₂ O	-2 inH ₂ O	0 oz/in ² to 35 oz/in ²	5 oz/in ²	0.5 oz/in ²
-60 inH ₂ O to 60 inH ₂ O	-10 inH ₂ O 10 inH ₂ O	-1 inH ₂ O 1 inH ₂ O	0 oz/in ² to 60 oz/in ²	10 oz/in ²	1 oz/in ²
0 inH ₂ O to 10 inH ₂ O	2 inH ₂ O	0.2 inH ₂ O	0 oz/in ² to 100 oz/in ²	20 oz/in ²	2 oz/in ²
0 inH ₂ O to 15 inH ₂ O	3 inH ₂ O	0.2 inH ₂ O	0 oz/in ² to 160 oz/in ² **	40 oz/in ²	4 oz/in ²
0 inH ₂ O to 30 inH ₂ O	5 inH ₂ O	0.5 inH ₂ O	0 oz/in ² inH ₂ O to 20 oz/in ² inH ₂ O	4 oz/in ² - 10 inH ₂ O	0.4 oz/in ² - 1 inH ₂ O
0 inH ₂ O to 60 inH ₂ O	10 inH ₂ O	1 inH ₂ O	0 oz/in ² inH ₂ O to 32 oz/in ² inH ₂ O	4 oz/in ² - 10 inH ₂ O	0.5 oz/in ² - 1 inH ₂ O
0 inH ₂ O to 100 inH ₂ O	20 inH ₂ O	2 inH ₂ O	0 psi to 3 psi	0.5 psi	0.05 psi
0 inH ₂ O to 160 inH ₂ O*	40 inH ₂ O	4 inH ₂ O	0 psi to 5 psi	1 psi	0.1 psi
0 inH ₂ O to 200 inH ₂ O	40 inH ₂ O	4 inH ₂ O	0 psi to 10 psi	2 psi	0.2 psi

* The values in the table are for 2-1/2". On 4" & 4-1/2" 0 inH₂O to 160 inH₂O gauges, the Figure is 20 inH₂O, and the Graduation is 2 inH₂O.

** The values in the table are for 2-1/2". On 4" & 4-1/2" 0 oz/in² to 160 oz/in² gauges, the Figure is 20 oz/in², and the Graduation is 2 oz/in².

Dial Indicating Gauge Accuracy/Standard Dial Configuration

Applies to:

100 Series Gauges: 4"

300 Series Gauges: 2-1/2"

400/500 Series Gauges: 2-1/2"

900 Series Gauges: 2-1/2"

ACCURACY: $\pm 1.6\%$ full scale											
Primary Scale			Secondary Scales								
Dial Range	Figure	Graduation	kPa	Figure	Graduation	kg/cm ²	Figure	Graduation	bar	Figure	Graduation
-30 inHg to 0 psi	-5 inHg	-0.5 inHg	-100 kPa to 0 kPa	-20 kPa	-2 kPa	-1.02 kg/cm ² to 0 kg/cm ²	-0.2 kg/cm ²	-0.02 kg/cm ²	-1 bar to 0 bar	-0.2 bar	-0.02 bar
-30 inHg to 15 psi	-10 inHg	-1 inHg	-100 kPa to 100 kPa	-50 kPa	-5 kPa	-1 kg/cm ² to 1.05 kg/cm ²	-0.5 kg/cm ²	-0.05 kg/cm ²	-1 bar to 1 bar	-0.5 bar	-0.05 bar
-30 inHg to 30 psi	-30 inHg	-2 inHg	-100 kPa to 205 kPa	-100 kPa	-10 kPa	-1 kg/cm ² to 2.10 kg/cm ²	-1 kg/cm ²	-0.1 kg/cm ²	-1 bar to 2 bar	-1 bar	-0.1 bar
-30 inHg to 60 psi	-30 inHg	-5 inHg	-100 kPa to 400 kPa	-100 kPa	-20 kPa	-1 kg/cm ² to 4.2 kg/cm ²	-1 kg/cm ²	-0.2 kg/cm ²	-1 bar to 4 bar	-1 bar	-0.2 bar
-30 inHg to 100 psi	-30 inHg	-5 inHg	-100 kPa to 680 kPa	-100 kPa	-20 kPa	-1 kg/cm ² to 7 kg/cm ²	-1 kg/cm ²	-0.2 kg/cm ²	-1 bar to 6.8 bar	-1 bar	-0.2 bar
-30 inHg to 160 psi	-30 inHg	-10 inHg	-100 kPa to 1,080 kPa	-100 kPa	-50 kPa	-1 kg/cm ² to 11.2 kg/cm ²	-1 kg/cm ²	-0.5 kg/cm ²	-1 bar to 11 bar	-1 bar	-0.5 bar
-30 inHg to 200 psi	-30 inHg	-10 inHg	-100 kPa to 1,360 kPa	-100 kPa	-50 kPa	-1 kg/cm ² to 14 kg/cm ²	-1 kg/cm ²	-0.5 kg/cm ²	-1 bar to 13.6 bar	-1 bar	-0.5 bar
-30 inHg to 300 psi	-30 inHg	-10 inHg	-100 kPa to 2,050 kPa	-100 kPa	-50 kPa	-1 kg/cm ² to 21 kg/cm ²	-1 kg/cm ²	-0.5 kg/cm ²	-1 bar to 20.5 bar	-1 bar	-0.5 bar
0 psi to 15 psi	3 psi	0.2 psi	0 kPa to 102 kPa	30 kPa	2 kPa	0 kg/cm ² to 1.04 kg/cm ²	0.3 kg/cm ²	0.02 kg/cm ²	0 bar to 1.02 bar	0.3 bar	0.02 bar
0 psi to 30 psi	5 psi	0.5 psi	0 kPa to 205 kPa	50 kPa	5 kPa	0 kg/cm ² to 2.1 kg/cm ²	0.5 kg/cm ²	0.05 kg/cm ²	0 bar to 2.05 bar	0.5 bar	0.05 bar
0 psi to 60 psi	10 psi	1 psi	0 kPa to 410 kPa	100 kPa	10 kPa	0 kg/cm ² to 4.2 kg/cm ²	1 kg/cm ²	0.1 kg/cm ²	0 bar to 4.10 bar	1 bar	0.1 bar
0 psi to 100 psi	20 psi	2 psi	0 kPa to 680 kPa	200 kPa	20 kPa	0 kg/cm ² to 7 kg/cm ²	2 kg/cm ²	0.2 kg/cm ²	0 bar to 6.8 bar	2 bar	0.2 bar
0 psi to 160 psi	40 psi	4 psi	0 kPa to 1,080 kPa	400 kPa	40 kPa	0 kg/cm ² to 11.2 kg/cm ²	4 kg/cm ²	0.4 kg/cm ²	0 bar to 11 bar	4 bar	0.4 bar
0 psi to 200 psi	40 psi	4 psi	0 kPa to 1,360 kPa	400 kPa	40 kPa	0 kg/cm ² to 14 kg/cm ²	4 kg/cm ²	0.4 kg/cm ²	0 bar to 13.6 bar	4 bar	0.4 bar
0 psi to 300 psi	50 psi	5 psi	0 kPa to 2,050 kPa	500 kPa	50 kPa	0 kg/cm ² to 21 kg/cm ²	5 kg/cm ²	0.5 kg/cm ²	0 bar to 20.5 bar	5 bar	0.5 bar
0 psi to 400 psi	100 psi	10 psi	0 kPa to 2,700 kPa	1,000 kPa	100 kPa	0 kg/cm ² to 28 kg/cm ²	10 kg/cm ²	1 kg/cm ²	0 bar to 27 bar	10 bar	1 bar
0 psi to 600 psi	100 psi	10 psi	0 kPa to 4,100 kPa	1,000 kPa	100 kPa	0 kg/cm ² to 42 kg/cm ²	10 kg/cm ²	1 kg/cm ²	0 bar to 41 bar	10 bar	1 bar
0 psi to 1,000 psi	200 psi	20 psi	0 kPa to 6,800 kPa	2,000 kPa	200 kPa	0 kg/cm ² to 70 kg/cm ²	20 kg/cm ²	2 kg/cm ²	0 bar to 68 bar	20 bar	2 bar
0 psi to 1,500 psi	300 psi	20 psi	0 kPa to 10,200 kPa	3,000 kPa	200 kPa	0 kg/cm ² to 104 kg/cm ²	30 kg/cm ²	2 kg/cm ²	0 bar to 102 bar	30 bar	2 bar
0 psi to 2,000 psi	400 psi	40 psi	0 kPa to 13,600 kPa	4,000 kPa	400 kPa	0 kg/cm ² to 140 kg/cm ²	40 kg/cm ²	4 kg/cm ²	0 bar to 136 bar	40 bar	4 bar
0 psi to 3,000 psi	500 psi	50 psi	0 kPa to 20,500 kPa	5,000 kPa	500 kPa	0 kg/cm ² to 210 kg/cm ²	50 kg/cm ²	5 kg/cm ²	0 bar to 205 bar	50 bar	5 bar
0 psi to 5,000 psi	1,000 psi	100 psi	0 kPa to 34,000 kPa	10,000 kPa	1,000 kPa	0 kg/cm ² to 350 kg/cm ²	100 kg/cm ²	10 kg/cm ²	0 bar to 340 bar	100 bar	10 bar
0 psi to 6,000 psi	1,000 psi	100 psi	0 kPa to 41,000 kPa	10,000 kPa	1,000 kPa	0 kg/cm ² to 420 kg/cm ²	100 kg/cm ²	10 kg/cm ²	0 bar to 410 bar	100 bar	10 bar
0 psi to 7,500 psi	1,500 psi	100 psi	0 kPa to 51,000 kPa	10,000 kPa	1,000 kPa	0 kg/cm ² to 520 kg/cm ²	100 kg/cm ²	10 kg/cm ²	0 bar to 510 bar	100 bar	10 bar
0 psi to 10,000 psi	2,000 psi	200 psi	0 kPa to 68,000 kPa	20,000 kPa	2,000 kPa	0 kg/cm ² to 700 kg/cm ²	200 kg/cm ²	20 kg/cm ²	0 bar to 680 bar	200 bar	20 bar
0 psi to 15,000 psi	3,000 psi	200 psi	0 kPa to 102,000 kPa	30,000 kPa	2,000 kPa	0 kg/cm ² to 1,040 kg/cm ²	300 kg/cm ²	20 kg/cm ²	0 bar to 1,020 bar	300 bar	20 bar

Dial Indicating Gauge Accuracy/Standard Dial Configuration

Applies to:
600/700 Series Gauges: 4-1/2"

ACCURACY: $\pm 0.5\%$ full scale

Primary Scale			Secondary Scales								
Dial Range	Figure	Graduation	kPa	Figure	Graduation	kg/cm ²	Figure	Graduation	bar	Figure	Graduation
-30 inHg to 0 psi	-5 inHg	-0.2 inHg	-101 kPa to 0 kPa	-20 kPa	-1 kPa	-1.03 kg/cm ² to 0 kg/cm ²	-0.2 kg/cm ²	-0.01 kg/cm ²	-1.01 bar to 0 bar	-0.2 bar	-0.01 bar
-30 inHg to 15 psi	-5 inHg 3 psi	-0.5 inHg 0.2 psi	-100 kPa to 102 kPa	-20 kPa 20 kPa	-2 kPa 2 kPa	-1 kg/cm ² to 1.04 kg/cm ²	-0.2 kg/cm ² 0.2 kg/cm ²	-0.02 kg/cm ² 0.02 kg/cm ²	-1 bar to 1.02 bar	-0.2 bar 0.2 bar	-0.02 bar 0.02 bar
-30 inHg to 30 psi	-10 inHg 5 psi	-1 inHg 0.5 psi	-100 kPa to 205 kPa	-50 kPa 50 kPa	-5 kPa 5 kPa	-1 kg/cm ² to 2.10 kg/cm ²	-0.5 kg/cm ² 0.5 kg/cm ²	-0.05 kg/cm ² 0.05 kg/cm ²	-1 bar to 2.05 bar	-0.5 bar 0.5 bar	-0.05 bar 0.05 bar
-30 inHg to 60 psi	-10 inHg 10 psi	-1 inHg 0.4 psi	-100 kPa to 412 kPa	-50 kPa 100 kPa	-5 kPa 4 kPa	-1 kg/cm ² to 4.2 kg/cm ²	-0.5 kg/cm ² 1 kg/cm ²	-0.01 kg/cm ² 0.04 kg/cm ²	-1 bar to 4.12 bar	-0.5 bar 1 bar	-0.01 bar 0.04 bar
-30 inHg to 100 psi	-30 inHg 10 psi	-2 inHg 1 psi	-100 kPa to 680 kPa	-100 kPa 100 kPa	-10 kPa 10 kPa	-1 kg/cm ² to 7 kg/cm ²	-1 kg/cm ² 1 kg/cm ²	-0.1 kg/cm ² 0.1 kg/cm ²	-1 bar to 6.8 bar	-1 bar 1 bar	-0.1 bar 0.1 bar
-30 inHg to 160 psi	-30 inHg 20 psi	-5 inHg 2 psi	-100 kPa to 1,100 kPa	-100 kPa 200 kPa	-20 kPa 20 kPa	-1 kg/cm ² to 11.2 kg/cm ²	-1 kg/cm ² 2 kg/cm ²	-0.2 kg/cm ² 0.2 kg/cm ²	-1 bar to 11 bar	-1 bar 2 bar	-0.2 bar 0.2 bar
-30 inHg to 200 psi	-30 inHg 20 psi	-5 inHg 2 psi	-100 kPa to 1,360 kPa	-100 kPa 200 kPa	-20 kPa 20 kPa	-1 kg/cm ² to 14 kg/cm ²	-1 kg/cm ² 2 kg/cm ²	-0.2 kg/cm ² 0.2 kg/cm ²	-1 bar to 13.6 bar	-1 bar 2 bar	-0.2 bar 0.2 bar
0 psi to 15 psi	3 psi	0.1 psi	0 kPa to 103 kPa	30 kPa	1 kPa	0 kg/cm ² to 1.05 kg/cm ²	0.3 kg/cm ²	0.01 kg/cm ²	0 bar to 1.03 bar	0.3 bar	0.01 bar
0 psi to 30 psi	5 psi	0.2 psi	0 kPa to 206 kPa	50 kPa	2 kPa	0 kg/cm ² to 2.1 kg/cm ²	0.5 kg/cm ²	0.02 kg/cm ²	0 bar to 2.06 bar	0.5 bar	0.02 bar
0 psi to 60 psi	10 psi	0.4 psi	0 kPa to 412 kPa	100 kPa	4 kPa	0 kg/cm ² to 4.2 kg/cm ²	1 kg/cm ²	0.04 kg/cm ²	0 bar to 4.12 bar	1 bar	0.04 bar
0 psi to 100 psi	10 psi	1 psi	0 kPa to 680 kPa	100 kPa	10 kPa	0 kg/cm ² to 7 kg/cm ²	1 kg/cm ²	0.1 kg/cm ²	0 bar to 6.8 bar	1 bar	0.1 bar
0 psi to 160 psi	20 psi	1 psi	0 kPa to 1,100 kPa	200 kPa	10 kPa	0 kg/cm ² to 11.2 kg/cm ²	2 kg/cm ²	0.1 kg/cm ²	0 bar to 11 bar	2 bar	0.1 bar
0 psi to 200 psi	20 psi	2 psi	0 kPa to 1,360 kPa	200 kPa	20 kPa	0 kg/cm ² to 14 kg/cm ²	2 kg/cm ²	0.2 kg/cm ²	0 bar to 13.6 bar	2 bar	0.2 bar
0 psi to 300 psi	50 psi	2 psi	0 kPa to 2,060 kPa	500 kPa	20 kPa	0 kg/cm ² to 21 kg/cm ²	5 kg/cm ²	0.2 kg/cm ²	0 bar to 20.6 bar	5 bar	0.2 bar
0 psi to 400 psi	40 psi	4 psi	0 kPa to 2,720 kPa	400 kPa	40 kPa	0 kg/cm ² to 28 kg/cm ²	4 kg/cm ²	0.4 kg/cm ²	0 bar to 27.2 bar	4 bar	0.4 bar
0 psi to 600 psi	100 psi	4 psi	0 kPa to 4,120 kPa	1,000 kPa	40 kPa	0 kg/cm ² to 42 kg/cm ²	10 kg/cm ²	0.4 kg/cm ²	0 bar to 41.2 bar	10 bar	0.4 bar
0 psi to 1,000 psi	100 psi	10 psi	0 kPa to 6,800 kPa	1,000 kPa	100 kPa	0 kg/cm ² to 70 kg/cm ²	10 kg/cm ²	1 kg/cm ²	0 bar to 68 bar	10 bar	1 bar
0 psi to 1,500 psi	300 psi	10 psi	0 kPa to 10,300 kPa	3,000 kPa	100 kPa	0 kg/cm ² to 105 kg/cm ²	30 kg/cm ²	1 kg/cm ²	0 bar to 103 bar	30 bar	1 bar
0 psi to 2,000 psi	200 psi	20 psi	0 kPa to 13,600 kPa	2,000 kPa	200 kPa	0 kg/cm ² to 140 kg/cm ²	20 kg/cm ²	2 kg/cm ²	0 bar to 136 bar	20 bar	2 bar
0 psi to 3,000 psi	500 psi	20 psi	0 kPa to 20,600 kPa	5,000 kPa	200 kPa	0 kg/cm ² to 210 kg/cm ²	50 kg/cm ²	2 kg/cm ²	0 bar to 206 bar	50 bar	2 bar
0 psi to 5,000 psi	500 psi	50 psi	0 kPa to 34,000 kPa	5,000 kPa	500 kPa	0 kg/cm ² to 350 kg/cm ²	50 kg/cm ²	5 kg/cm ²	0 bar to 340 bar	50 bar	5 bar
0 psi to 6,000 psi	1,000 psi	40 psi	0 kPa to 41,200 kPa	10,000 kPa	400 kPa	0 kg/cm ² to 420 kg/cm ²	100 kg/cm ²	4 kg/cm ²	0 bar to 412 bar	100 bar	4 bar
0 psi to 10,000 psi	1,000 psi	100 psi	0 kPa to 68,000 kPa	10,000 kPa	1,000 kPa	0 kg/cm ² to 700 kg/cm ²	100 kg/cm ²	10 kg/cm ²	0 bar to 680 bar	100 bar	10 bar
0 psi to 15,000 psi	3,000 psi	100 psi	0 kPa to 103,000 kPa	30,000 kPa	1,000 kPa	0 kg/cm ² to 1,050 kg/cm ²	300 kg/cm ²	10 kg/cm ²	0 bar to 1,030 bar	300 bar	10 bar
0 psi to 20,000 psi	2,000 psi	200 psi	0 kPa to 136,000 kPa	20,000 kPa	2,000 kPa	0 kg/cm ² to 1,400 kg/cm ²	200 kg/cm ²	20 kg/cm ²	0 bar to 1,360 bar	200 bar	20 bar
0 psi to 30,000 psi	5,000 psi	200 psi	0 kPa to 206,000 kPa	50,000 kPa	2,000 kPa	0 kg/cm ² to 2,100 kg/cm ²	500 kg/cm ²	20 kg/cm ²	0 bar to 2,060 bar	500 bar	20 bar
0 psi to 40,000 psi	4,000 psi	400 psi	0 kPa to 272,000 kPa	40,000 kPa	4,000 kPa	0 kg/cm ² to 2,800 kg/cm ²	400 kg/cm ²	40 kg/cm ²	0 bar to 2,720 bar	400 bar	40 bar
0 psi to 50,000 psi	5,000 psi	500 psi	0 kPa to 340,000 kPa	50,000 kPa	5,000 kPa	0 kg/cm ² to 3,500 kg/cm ²	500 kg/cm ²	50 kg/cm ²	0 bar to 3,400 bar	500 bar	50 bar
0 psi to 60,000 psi	10,000 psi	400 psi	0 kPa to 412,000 kPa	100,000 kPa	4,000 kPa	0 kg/cm ² to 4,200 kg/cm ²	1,000 kg/cm ²	40 kg/cm ²	0 bar to 4,120 bar	1,000 bar	40 bar

Dial Indicating Gauge Accuracy/Standard Dial Configuration

100 Series Gauges: 1-1/2", 2" and 2-1/2"

Applies to:
400 Series Gauges: 1-1/2"

900 Series Gauges: 1-1/2" and 2"

ACCURACY: $\pm 2.5\%$ full scale											
Primary Scale			Secondary Scales								
Dial Range	Figure	Graduation	kPa	Figure	Graduation	kg/cm ²	Figure	Graduation	bar	Figure	Graduation
-30 inHg to 0 psi	-5 inHg	-0.5 inHg	-100 kPa to 0 kPa	-20 kPa	-5 kPa	-1 kg/cm ² to 0 kg/cm ²	-0.2 kg/cm ²	-0.05 kg/cm ²	-1 bar to 0 bar	-0.2 bar	-0.05 bar
-30 inHg to 15 psi	-10 inHg	-1 inHg	-100 kPa to 100 kPa	-50 kPa	-5 kPa	-1 kg/cm ² to 1.05 kg/cm ²	-0.5 kg/cm ²	-0.05 kg/cm ²	-1 bar to 1 bar	-0.5 bar	-0.05 bar
-30 inHg to 30 psi	-30 inHg	-2 inHg	-100 kPa to 200 kPa	-100 kPa	-10 kPa	-1 kg/cm ² to 2.10 kg/cm ²	-1 kg/cm ²	-0.1 kg/cm ²	-1 bar to 2 bar	-1 bar	-0.1 bar
-30 inHg to 60 psi	-30 inHg	-5 inHg	-100 kPa to 400 kPa	-100 kPa	-20 kPa	-1 kg/cm ² to 4.2 kg/cm ²	-1 kg/cm ²	-0.2 kg/cm ²	-1 bar to 4 bar	-1 bar	-0.2 bar
-30 inHg to 100 psi	-30 inHg	-10 inHg	-100 kPa to 680 kPa	-100 kPa	-50 kPa	-1 kg/cm ² to 7 kg/cm ²	-1 kg/cm ²	-0.5 kg/cm ²	-1 bar to 6.8 bar	-1 bar	-0.5 bar
-30 inHg to 160 psi	-30 inHg	-10 inHg	-100 kPa to 1,100 kPa	-100 kPa	-50 kPa	-1 kg/cm ² to 11.2 kg/cm ²	-1 kg/cm ²	-0.5 kg/cm ²	-1 bar to 11 bar	-1 bar	-0.5 bar
-30 inHg to 200 psi	-30 inHg	-10 inHg	-100 kPa to 1,360 kPa	-100 kPa	-50 kPa	-1 kg/cm ² to 14 kg/cm ²	-1 kg/cm ²	-0.5 kg/cm ²	-1 bar to 13.6 bar	-1 bar	-0.5 bar
-30 inHg to 300 psi	-30 inHg	-30 inHg	-100 kPa to 2,050 kPa	-100 kPa	-100 kPa	-1 kg/cm ² to 21 kg/cm ²	-1 kg/cm ²	-1 kg/cm ²	-1 bar to 20.5 bar	-1 bar	-1 bar
0 psi to 15 psi	3 psi	0.5 psi	0 kPa to 100 kPa	30 kPa	5 kPa	0 kg/cm ² to 1.05 kg/cm ²	0.3 kg/cm ²	0.05 kg/cm ²	0 bar to 1 bar	0.3 bar	0.05 bar
0 psi to 30 psi	5 psi	0.5 psi	0 kPa to 205 kPa	50 kPa	5 kPa	0 kg/cm ² to 2.1 kg/cm ²	0.5 kg/cm ²	0.05 kg/cm ²	0 bar to 2.05 bar	0.5 bar	0.05 bar
0 psi to 60 psi	10 psi	1 psi	0 kPa to 410 kPa	100 kPa	10 kPa	0 kg/cm ² to 4.2 kg/cm ²	1 kg/cm ²	0.1 kg/cm ²	0 bar to 4.1 bar	1 bar	0.1 bar
0 psi to 100 psi	20 psi	2 psi	0 kPa to 680 kPa	200 kPa	20 kPa	0 kg/cm ² to 7 kg/cm ²	2 kg/cm ²	0.2 kg/cm ²	0 bar to 6.8 bar	2 bar	0.2 bar
0 psi to 160 psi	40 psi	4 psi	0 kPa to 1,100 kPa	400 kPa	40 kPa	0 kg/cm ² to 11.2 kg/cm ²	4 kg/cm ²	0.4 kg/cm ²	0 bar to 11 bar	4 bar	0.4 bar
0 psi to 200 psi	40 psi	4 psi	0 kPa to 1,360 kPa	400 kPa	40 kPa	0 kg/cm ² to 14 kg/cm ²	4 kg/cm ²	0.4 kg/cm ²	0 bar to 13.6 bar	4 bar	0.4 bar
0 psi to 300 psi	50 psi	5 psi	0 kPa to 2,050 kPa	500 kPa	50 kPa	0 kg/cm ² to 21 kg/cm ²	5 kg/cm ²	0.5 kg/cm ²	0 bar to 20.5 bar	5 bar	0.5 bar
0 psi to 400 psi	100 psi	10 psi	0 kPa to 2,700 kPa	1,000 kPa	100 kPa	0 kg/cm ² to 28 kg/cm ²	10 kg/cm ²	1 kg/cm ²	0 bar to 27 bar	10 bar	1 bar
0 psi to 600 psi	100 psi	10 psi	0 kPa to 4,100 kPa	1,000 kPa	100 kPa	0 kg/cm ² to 42 kg/cm ²	10 kg/cm ²	1 kg/cm ²	0 bar to 41 bar	10 bar	1 bar
0 psi to 1,000 psi	200 psi	20 psi	0 kPa to 6,800 kPa	2,000 kPa	200 kPa	0 kg/cm ² to 70 kg/cm ²	20 kg/cm ²	2 kg/cm ²	0 bar to 68 bar	20 bar	2 bar
0 psi to 1,500 psi	300 psi	50 psi	0 kPa to 10,000 kPa	3,000 kPa	500 kPa	0 kg/cm ² to 105 kg/cm ²	30 kg/cm ²	5 kg/cm ²	0 bar to 100 bar	30 bar	5 bar
0 psi to 2,000 psi	400 psi	40 psi	0 kPa to 13,600 kPa	4,000 kPa	400 kPa	0 kg/cm ² to 140 kg/cm ²	40 kg/cm ²	4 kg/cm ²	0 bar to 136 bar	40 bar	4 bar
0 psi to 3,000 psi	500 psi	50 psi	0 kPa to 20,500 kPa	5,000 kPa	500 kPa	0 kg/cm ² to 210 kg/cm ²	50 kg/cm ²	5 kg/cm ²	0 bar to 205 bar	50 bar	5 bar
0 psi to 5,000 psi	1000 psi	100 psi	0 kPa to 34,000 kPa	10,000 kPa	1,000 kPa	0 kg/cm ² to 350 kg/cm ²	100 kg/cm ²	10 kg/cm ²	0 bar to 340 bar	100 bar	10 bar
0 psi to 6,000 psi	1000 psi	100 psi	0 kPa to 41,000 kPa	10,000 kPa	1,000 kPa	0 kg/cm ² to 420 kg/cm ²	100 kg/cm ²	10 kg/cm ²	0 bar to 410 bar	100 bar	10 bar

Dial Indicating Gauge Accuracy/Standard Dial Configuration

Applies to:
800 Series Gauges

ACCURACY: $\pm 0.25\%$ full scale					
Primary Scale			Primary Scale		
Dial Range	Figure	Graduation	Dial Range	Figure	Graduation
0 psi to 30 psi	2 psi	0.1 psi	0 psi to 1,500 psi	100 psi	5 psi
0 psi to 60 psi	5 psi	0.2 psi	0 psi to 2,000 psi	200 psi	10 psi
0 psi to 100 psi	10 psi	0.5 psi	0 psi to 3,000 psi	250 psi	10 psi
0 psi to 160 psi	20 psi	0.8 psi	0 psi to 5,000 psi	500 psi	20 psi
0 psi to 200 psi	20 psi	1 psi	0 psi to 6,000 psi	500 psi	20 psi
0 psi to 300 psi	25 psi	1 psi			
0 psi to 400 psi	50 psi	2 psi			
0 psi to 600 psi	50 psi	2 psi			
0 psi to 1,000 psi	100 psi	5 psi			

PRESSURE & VACUUM CONVERSIONS

Pounds per Square Inch	bar	Kilopascals	Kilograms per Square Centimeter	Ounces per Square Inch	Inches of Mercury	Millimeters of Mercury	Inches of Water
psi	bar	kPa	kg/cm ²	oz/in ²	inHg	mmHg*	inH ₂ O
1	.0689476	6.89476	.0703069	16	2.03602	51.71485	27.6807
14.5038	1	100	1.019716	232.0608	29.530	750.0626	401.8596
.145038	.01	1	.0101972	2.320608	.295299	7.500610	401.8596
14.2233	.9806649	98.06649	1	227.5739	28.95901	735.5588	393.7118
.0625	.0043092	.4309223	.0043942	1	.1272513	3.23218	1.73004
.4911542	.0338639	3.386389	.0345316	7.85847	1	25.4	13.59548
.0193368	.0013332	.1333225	.0013595	.3093888	.0393701	1	.535255
.0361263	.0024908	.2490819	.0025422	.578020	.0735539	1.868268	1

* 1 kPa = 1 kN/m², 1 mmHg = 1 Torr, 1 Kg/cm² = 1 kp/cm²
(Conversions of: H₂O are at 39.2 °F (4 °C): Hg are at 32 °F (0 °C))

CONVERSIONS FOR HYDRAULIC RAM CAPACITY

$$\text{psi} \times \text{AREA} = (\text{LBS.}) \text{ FORCE} \qquad \text{TONS} = \frac{\text{psi} \times .7854 \times D^2}{2000} \qquad \text{psi} = \frac{\text{TONS}}{D^2 \times .0003927}$$

For further assistance with conversions please consult the factory.



Shown with enhanced software.

1000 SERIES

- Rugged, electronic gauge
- Compound and standard ranges through 0 psig to 10,000 psig
- 3.31" gauge size
- Stainless Steel case
- Stainless Steel wetted parts
- CE compliant to suppress RFI, EMI and ESD

APPLICATIONS

- Hydraulics & pneumatics
- Laboratory & test equipment
- Leak detection
- Power generation
- Water management

OPTIONAL ENHANCED SOFTWARE FEATURES

- Tare function
- Password protection
- Min./max. memory
- Internal lighting
- 300° rotatable base



Optional Gauge Carrying Case

SPECIFICATIONS

Pressure ranges	0 psig to 72 psig through 0 psig to 10,000 psig Compound ranges available
Accuracy	±0.25% full scale (BFSL): ±0.5% terminal point ±1 digit
Temperature ranges	Compensated 32 °F to 140 °F (0 °C to 60 °C) Effect ±0.15% per 10K at zero and span Span effect is ±0.005% full scale/ °F Media -22 °F to 185 °F (-30 °C to 85 °C) Ambient 14 °F to 140 °F (-10 °C to 60 °C) Storage -4 °F to 158 °F (-20 °C to 70 °C)
Measuring element	Stainless Steel, thin-film measuring element
Connection	1/4" NPT Male, 316 Stainless Steel
Case	Stainless Steel
Bezel	Stainless Steel triangular
Display	Liquid Crystal Display with 0.43" digits 4 digits up to 9999 with bar graph
Power requirement*	2 x 1.5V "AA" battery 4,000 hrs ("AA" 2000 mAh)
Response time	200 ms
Proof pressure	2 times full scale range, maximum 15,000 psi
Programmable functions	Adjustable through front key pad
Measuring units	bar, psi, MPa
Peak memory	min/max, display, hold
Environmental rating	IP65
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Weight	0.88 lb.

* Unregulated



WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

ORDERING INFORMATION												
SERIES		1000										
PRESSURE RANGES	30/72	-30 inHg to 0 to 72 psig		300	0 psig to 300 psig		2000	0 psig to 2,000 psig		6000	0 psig to 6,000 psig	
	30/145	-30 inHg to 0 to 145 psig		600	0 psig to 600 psig		3000	0 psig to 3,000 psig		7500	0 psig to 7,500 psig	
	145	0 psig to 145 psig		1450	0 psig to 1,450 psig		5000	0 psig to 5,000 psig		10000	0 psig to 10,000 psig *	
			psig = gauge pressure		Other ranges available on request							
PROCESS CONNECTION		2	1/4"NPT male									
OPTIONS	1	Peak memory - standard			GC	Gauge Carrying Case		RCP	Rubber Case Protector			
	6	Enhanced software			ST8	Threaded Orifice						


Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Standard model will only display 9999 psig.

EXAMPLE

Series 1000 Series
 Pressure range 0 psig to 1,450 psig
 Process connection 1/4" NPT Male
 Options Peak memory
 Options Gauge Carrying Case

1000 - 1450 - 2 - 1 - GC

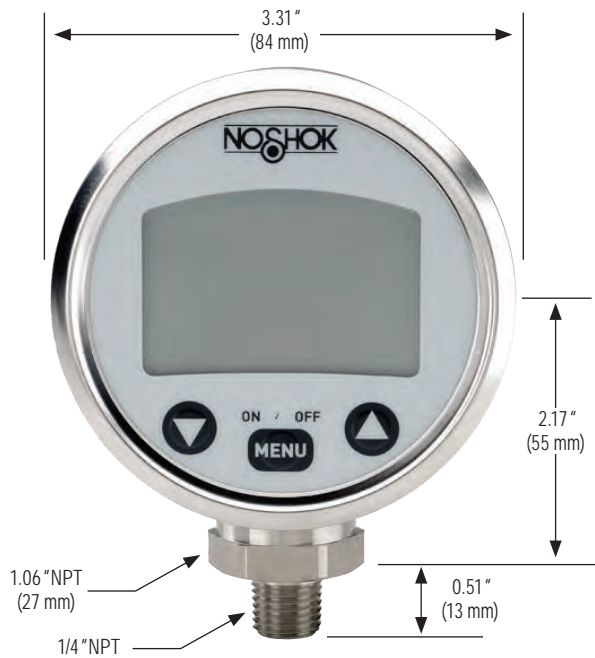



100 SERIES

- Vacuum and compound ranges through 0 psig to 15,000 psig
- Current output
- 316 and 17-4PH Stainless Steel wetted parts
- CE compliant to suppress RFI, EMI and ESD

APPLICATIONS

- HVAC
- Hydraulics & pneumatics
- Injection molding machines
- Railroad equipment
- Stamping & forming presses

SPECIFICATIONS

Output signal	4 mA to 20 mA, 2-wire
Pressure ranges	Vacuum through 0 psig to 15,000 psig Absolute from 0 psia to 15 psia through 0 psia to 300 psia
Accuracy	±0.5% full scale (BFSL); optional ±0.25% full scale (BFSL); (Includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	≤ ±0.2% full scale for 1 year, non-accumulating
Adjustment	≤ ±10% full scale for zero and span
Response time	≤ 1 ms (between 10% and 90% full scale)
Service life	> 100,000,000 load cycles
Temperature ranges	Compensated 32 °F to 176 °F (0 °C to 80 °C) Effect ±0.017% full scale/ °F for zero and span Media -22 °F to 212 °F (-30 °C to 100 °C) Ambient -40 °F to 185 °F (-40 °C to 85 °C) Storage -40 °F to 212 °F (-40 °C to 100 °C)
Power requirement*	10 Vdc to 30 Vdc (4 mA to 20 mA, 2-wire)
Load limitations	≤ (Vpower supply -10)/020 Amp
Proof pressure	3 times full scale for ranges 0 psi to 5 psi through 0 psi to 200 psi 1.75 times full scale for ranges 0 psi to 300 psi through 0 psi to 10,000 psi 1.5 times full scale for 0 to 15,000 psi
Burst pressure	3.8 times full scale for ranges 0 psi to 5 psi through 0 psi to 200 psi 4 times full scale for ranges 0 psi to 300 psi through 0 psi to 10,000 psi 3 times full scale for 0 psi to 15,000 psi
Measuring element	316 Stainless Steel for vacuum through 300 psi; 17-4PH Stainless Steel for ≥500 psi
Connection	316 Stainless Steel
Housing material	316 Stainless Steel
Environmental rating	IP65
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity, over-voltage and short circuit protection
Shock	1000 g's according to IEC 60068-2-27
Vibration	20 g's according to IEC 60068-2-6
Weight	Approximately 3.5 oz.

* Unregulated




ORDERING INFORMATION										
SERIES	100									
PRESSURE RANGES	30vac	-30 inHg to 0 psig	5	0 psig to 5 psig	200	0 psig to 200 psig	3000	0 psig to 3,000 psig	15A	0 psia to 15 psia
	30/15	-30 inHg to 15 psig	10	0 psig to 10 psig	300	0 psig to 300 psig	4000	0 psig to 4,000 psig	30A	0 psia to 30 psia
	30/30	-30 inHg to 30 psig	15	0 psig to 15 psig	500	0 psig to 500 psig	5000	0 psig to 5,000 psig	60A	0 psia to 60 psia
	30/45	-30 inHg to 45 psig	25	0 psig to 25 psig	600	0 psig to 600 psig	6000	0 psig to 6,000 psig	100A	0 psia to 100 psia
	30/100	-30 inHg to 100 psig	30	0 psig to 30 psig	750	0 psig to 750 psig	7500	0 psig to 7,500 psig	150A	0 psia to 150 psia
	30/150	-30 inHg to 150 psig	60	0 psig to 60 psig	1000	0 psig to 1,000 psig	10000	0 psig to 10,000 psig	200A	0 psia to 200 psia
	30/200	-30 inHg to 200 psig	100	0 psig to 100 psig	1500	0 psig to 1,500 psig	15000	0 psig to 15,000 psig	300A	0 psia to 300 psia
	30/300	-30 inHg to 300 psig	150	0 psig to 150 psig	2000	0 psig to 2,000 psig				
			psig = gauge pressure	psia = absolute pressure	Other ranges available on request					
ACCURACIES	1	±0.5% full scale (BFSL)			2	±0.25% full scale (BFSL)				
OUTPUT SIGNAL	1	4 mA to 20 mA, 2-wire								
PROCESS CONNECTIONS	1	1/8" NPT male		3 SAE J1926-3:7/16-20 Adjustable			10 G1/4 male			
	2	1/4" NPT male		9 SAE J1926-1:7/16-20						
ELECTRICAL CONNECTIONS	1	36" cable (connected to option 7)			6 1/2" NPT conduit (with 36" cable)				25 M12 x 1 (4-pin)	
	2	4-pin Bendix			7 Mini-Hirschmann (DIN EN 175301-803 Form C)				36 Integral cable 36"	
	3	6-pin Bendix								
OPTION	ST8	Threaded Orifice								

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

EXAMPLE

Series	100 Series
Pressure range	0 psig to 500 psig
Accuracy	±0.5% full scale (BFSL)
Output signal	4 mA to 20 mA, 2-wire
Process connection	1/4" NPT Male
Electrical connection	Mini-Hirschmann
Option	Threaded Orifice

Load Limitations 4 mA to 20 mA output	
Vmin	= 10V + (.020 x RL)
RL	= Loop resistance (Ω) RL = RS + RW
RS	= Sensor resistance (Ω)
RW	= Wire resistance (Ω)

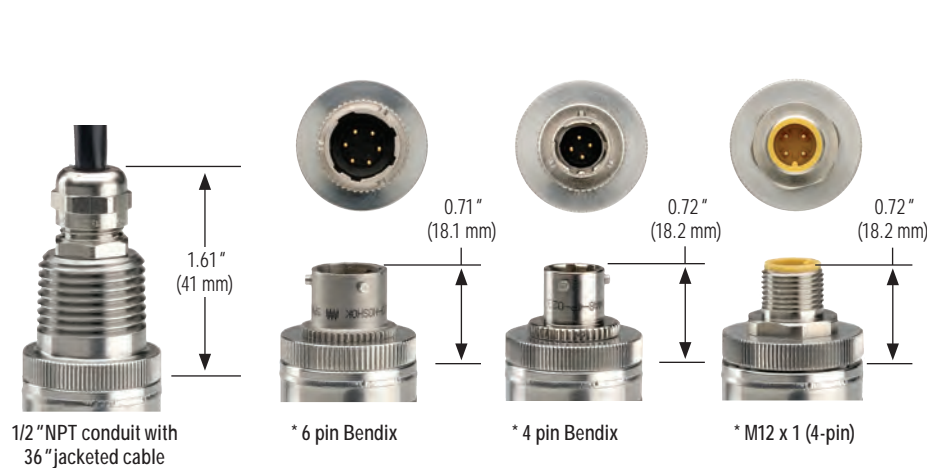

WIRING				
Wire	Bendix 4-pin or 6-pin	Mini- Hirschmann	Cable	M12 x 1
+ Supply	pin A	pin 1	Red	pin 1
+ Output	pin B	pin 2	Black	pin 3

* Note: Mate supplied separately or customer supplied.





200 SERIES

- Ranges from vacuum to 0 psig to 15,000 psig; absolute ranges from 0 psia to 15 psia through 0 psia to 300 psia
- Voltage output
- 316 and 17-4PH Stainless Steel wetted parts
- CE compliant to suppress RFI, EMI and ESD

SPECIFICATIONS

Output signals	0 Vdc to 5 Vdc, 3-wire; 0 Vdc to 10 Vdc, 3-wire; 1 Vdc to 5 Vdc, 3-wire; 1 Vdc to 6 Vdc, 3-wire; 1 Vdc to 11 Vdc, 3-wire
Pressure ranges	Vacuum through 0 psig to 15,000 psig Absolute from 0 psia to 15 psia through 0 psia to 300 psia
Accuracy	±0.5% full scale (BFSL); optional ±0.25% full scale (BFSL); (Includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	≤ ±0.2% full scale per year, non-accumulating
Adjustment	±10% full scale for zero and span
Response time	≤ 1 ms (between 10% and 90% full scale)
Service life	> 100,000,000 load cycles
Temperature ranges	Compensated 32 °F to 176 °F (0 °C to 80 °C) Effect ±0.017% full scale/ °F for zero and span Media -22 °F to 212 °F (-30 °C to 100 °C) Ambient -40 °F to 185 °F (-40 °C to 85 °C) Storage -40 °F to 212 °F (-40 °C to 100 °C)
Power requirement*	10 Vdc to 30 Vdc (0 Vdc to 5 Vdc, 3-wire, 1 Vdc to 5 Vdc, 3-wire, 1 Vdc to 6 Vdc, 3-wire) 14 Vdc to 30 Vdc (0 Vdc to 10 Vdc, 3-wire, 1 Vdc to 11 Vdc, 3-wire)
Load limitations	≥ 5,000 Ω for 0 Vdc to 5 Vdc, 1 Vdc to 5 Vdc, and 1 Vdc to 6 Vdc outputs; ≥ 10,000 Ω for 0 Vdc to 10 Vdc and 1 Vdc to 11 Vdc outputs. Current consumption 8 mA
Proof pressure	3 times full scale for ranges 0 psi to 5 psi through 0 psi to 200 psi 1.75 times full scale for ranges 0 psi to 300 psi through 0 psi to 10,000 psi 1.5 times full scale for 0 psi to 15,000 psi
Burst pressure	3.8 times full scale for ranges 0 psi to 5 psi through 0 psi to 200 psi 4 times full scale for ranges 0 psi to 300 psi through 0 psi to 10,000 psi 3 times full scale for 0 psi to 15,000 psi
Measuring element	316 Stainless Steel for vacuum through 300 psi; 17-4PH Stainless Steel for ≥500 psi
Connection	316 Stainless Steel
Housing material	316 Stainless Steel
Environmental rating	IP65
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity, over-voltage and short circuit protection
Shock	1,000 g's according to IEC 60068-2-27
Vibration	20 g's according to IEC 60068-2-6
Weight	Approximately 3.5 oz.

* Unregulated

APPLICATIONS

- HVAC
- Hydraulics & pneumatics
- Injection molding machines
- Railroad equipment
- Stamping & forming presses




ORDERING INFORMATION															
SERIES	200														
PRESSURE RANGES	30vac	-30 inHg to 0 psig	30/300	-30 inHg to 300 psig	200	0 psig to 200 psig	3000	0 psig to 3,000 psig	15A	0 psia to 15 psia					
	30/15	-30 inHg to 15 psig	5	0 psig to 5 psig	300	0 psig to 300 psig	4000	0 psig to 4,000 psig	30A	0 psia to 30 psia					
	30/30	-30 inHg to 30 psig	10	0 psig to 10 psig	500	0 psig to 500 psig	5000	0 psig to 5,000 psig	60A	0 psia to 60 psia					
	30/45	-30 inHg to 45 psig	15	0 psig to 15 psig	600	0 psig to 600 psig	6000	0 psig to 6,000 psig	100A	0 psia to 100 psia					
	30/60	-30 inHg to 60 psig	30	0 psig to 30 psig	750	0 psig to 750 psig	7500	0 psig to 7,500 psig	150A	0 psia to 150 psia					
	30/100	-30 inHg to 100 psig	60	0 psig to 60 psig	1000	0 psig to 1,000 psig	10000	0 psig to 10,000 psig	200A	0 psia to 200 psia					
	30/150	-30 inHg to 150 psig	100	0 psig to 100 psig	1500	0 psig to 1,500 psig	15000	0 psig to 15,000 psig	300A	0 psia to 300 psia					
	30/200	-30 inHg to 200 psig	150	0 psig to 150 psig	2000	0 psig to 2,000 psig									
				psig = gauge pressure	psia = absolute pressure	Other ranges available on request									
ACCURACIES	1	±0.5% full scale (BFSL)			2	±0.25% full scale (BFSL)									
OUTPUT SIGNALS	2	0 Vdc to 5 Vdc, 3-wire		3	1 Vdc to 5 Vdc, 3-wire		4	1 Vdc to 6 Vdc, 3-wire		5	0 Vdc to 10 Vdc, 3-wire		6	1 Vdc to 11 Vdc, 3-wire	
PROCESS CONNECTIONS	1	1/8" NPT male			3	SAE J1926-3:7/16-20 adjustable					10	G1/4 male			
	2	1/4" NPT male			9	SAE J1926-1:7/16-20									
ELECTRICAL CONNECTION	1	36" cable (connected to option 7)				6	1/2"NPT conduit (with 36" cable)				25	M12 x 1 (4-pin)			
	2	4-pin Bendix				7	Mini-Hirschmann (DIN EN 175301-803 form C)				36	Integral cable 36"			
	3	6-pin Bendix													
	NOTE: 0 Vdc to 5 Vdc and 0 Vdc to 10 Vdc outputs are also available in 4-wire configurations for use with other electrical systems.														
OPTION	ST8	Threaded Orifice													

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

EXAMPLE

200 - 500 - 1 - 2 - 2 - 7 - ST8

Series200 Series
 Pressure range0 psig to 500 psig
 Accuracy±0.5% full scale (BFSL)
 Output signal0 Vdc to 5 Vdc, 3-wire
 Process connection1/4" NPT Male
 Electrical connectionMini-Hirschmann
 OptionThreaded Orifice

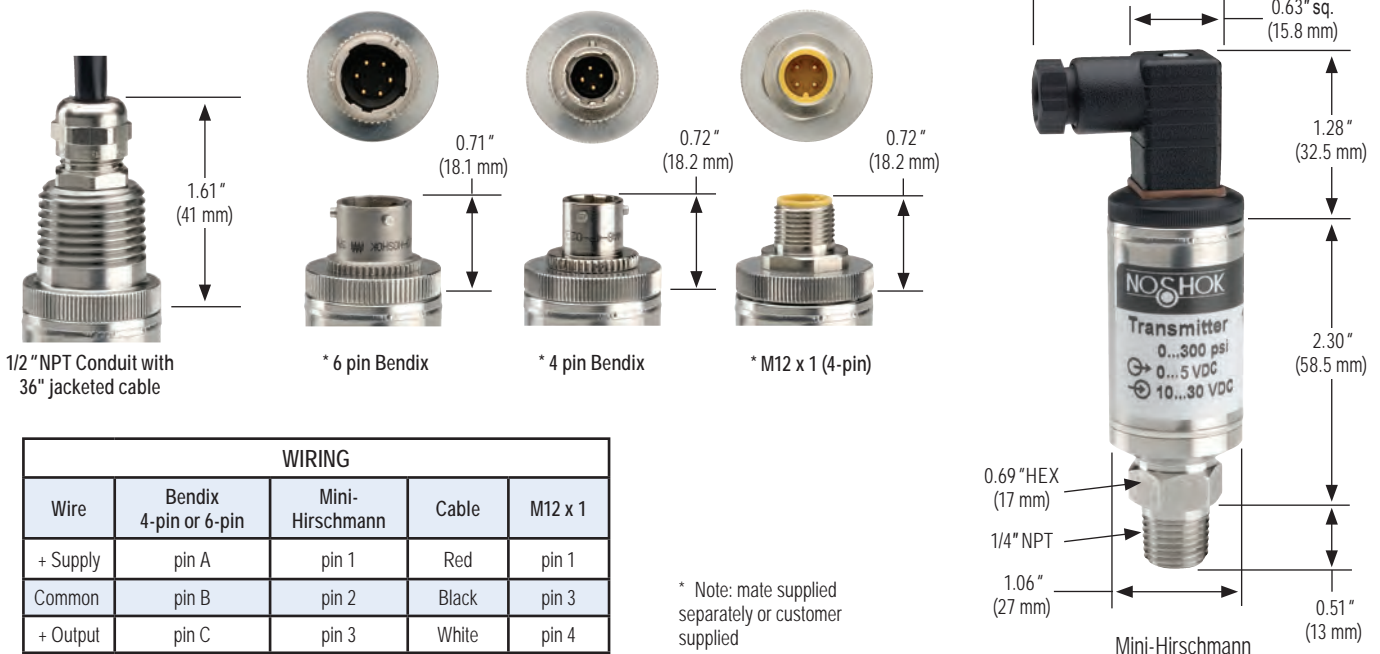

Small Diameter Submersible



Shown with optional
NPT conduit and
optional FEP cable

APPLICATIONS

- Well head measurement
- Groundwater monitoring
- Level measurement in open bodies of water
- Sewage lift and pumping stations
- Setting ponds and rainwater basins

611 SERIES

- Hydrostatic level measurement for use in applications including bore holes and wells with small diameters (outer diameter 0.87")
- Low power output signals for battery-powered applications, and optional temperature output available
- 5:1 turndown using optional HART® signal
- 316L Stainless Steel, PVDF and polyurethane wetted parts
- CE compliant to suppress RFI, EMI and ESD
- Certifications pending:
 - ATEX
 - CSA
 - IECEx

SPECIFICATIONS

Output signals	4 mA to 20 mA, 2-wire 4 mA to 20 mA + HART®, 2-wire 4 mA to 20 mA x 2 (pressure and temperature)* 0.1 Vdc to 2.5 Vdc, 3-wire 0.1 Vdc to 2.5 Vdc x 2 (pressure and temperature)*
Pressure ranges**	0 inH ₂ O to 50 inH ₂ O through 0 psig to 100 psig
Accuracy	± 1.0% of span (± 0.5% of span optional) Includes non-linearity, hysteresis, zero offset and end value deviation per IEC 61298-2 Accuracy after turndown via HART®, ≤ ±1.25% of scaled span (0.75% optional) Temperature sensor 14 °F to 176 °F (-10 °C to 80 °C): ≤ ± 3.3 °F
Stability	≤ ± 0.1% of span per year
Switch on time	Output signals without HART®: ≤150 ms Output signals with HART®: ≤250 ms
Settling time	Output signals without HART®: ≤100 ms Output signals with HART®: ≤250 ms
Durability	> 100,000,000 full scale cycles
Temperature ranges	Compensated 32 °F to 176 °F (0 °C to 80 °C) Effect ± 0.01%/ °F for zero and span Standard Media 14 °F to 122 °F (-10 °C to 50 °C) Optional Media -40 °F to 176 °F (-40 °C to 80 °C) Storage -40 °F to 176 °F (-40 °C to 80 °C)
Power requirement***	4mA to 20 mA: 8 Vdc to 36 Vdc 4 mA to 20 mA and HART®: 12-36 Vdc 0.1 to 2.5 Vdc: 3.6 - 36 Vdc
Load limitations	4 mA to 20 mA: ≤ (Vpower - 8 V) / 0.022 A 4 mA to 20 mA and HART®: ≤ (Vpower - 9.6 V) / 0.022 A
Proof pressure	5 times range
Measuring element	Cap: PVDF Sensor: 316 stainless steel, optional Hastelloy C-276 Cable: Polyurethane, optional FEP
Connection	316 stainless steel
Housing material	316 stainless steel, 318 LN optional
Environmental rating	IP68
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014 RFI, EMI and ESD protection
Electrical protection	Reverse polarity protection, short circuit and resistance to overvoltage :DC 40V and increased overvoltage for lightning protection. Normal discharge current ≥10 kA, Rise time 8/20 μs
Max. submersion depth	325 ft./100 meters
Vibration	4 g's according to IEC 60068-2-6
Weight	Approximately 10.6 oz. with standard nosecone - cable .5 lb per 10 ft.

* Temperature measurement is based on the media temperature range

** Other ranges and measuring units available including bar, mbar, MPa, kPa, and mH₂O

*** Unregulated



WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

ORDERING INFORMATION					
SERIES	611			611H 318LN/Hastelloy C-276	
PRESSURE RANGES	50 inH ₂ O	0 inH ₂ O to 50 inH ₂ O	5	0 psig to 5 psig (11.5 ftH ₂ O)	50 0 psig to 50 psig (115 ftH ₂ O)
	100 inH ₂ O	0 inH ₂ O to 100 inH ₂ O	10	0 psig to 10 psig (23.1 ftH ₂ O)	100 0 psig to 100 psig (230.8 ftH ₂ O)
	150 inH ₂ O	0 inH ₂ O to 150 inH ₂ O	15	0 psig to 15 psig (34.6 ftH ₂ O)	25A 0 psia to 25 psia
	250 inH ₂ O	0 inH ₂ O to 250 inH ₂ O	25	0 psig to 25 psig (57.7 ftH ₂ O)	50A 0 psia to 50 psia
psig = gauge pressure psia = absolute pressure Other ranges and measuring units available on request					
ACCURACIES	1	±1.0 of span	2	±0.5% of span	
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire	48	0.1 Vdc to 2.5 Vdc, 3 wire**	
	43	4 mA to 20 mA, 2-wire and HART® signal	49	0.1 Vdc to 2.5 Vdc x 2 (pressure and temperature) *, **	
	47	4 mA to 20 mA x 2 (pressure and temperature)*			
PROCESS CONNECTIONS	N	Nosecone	W	Weighted nosecone	
ELECTRICAL CONNECTIONS	XX	Standard polyurethane (PUR) cable	62-XX	Polyurethane (PUR) cable with 1/2" NPT conduit connection	
	38-XX	Optional FEP cable	63-XX	FEP cable with 1/2" NPT conduit connection	
NOTE: XX = length of cable in feet					
OPTIONS	CBC	Cable Clamp	LP	Lightning Protection	JB Cable Junction Box (NEMA 4X) HT Increased media temperature (-40 °F to 176 °F)


Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Temperature measurement is based on the media temperature range

** Low power is optimized for battery operation

EXAMPLE


Series 611 Series
 Pressure range 0 psig to 5 psig
 Accuracy ±1.0 of span
 Output signal 4 mA to 20 mA, 2-wire
 Process connection Nosecone
 Electrical connection 50 feet of submersible polyurethane cable

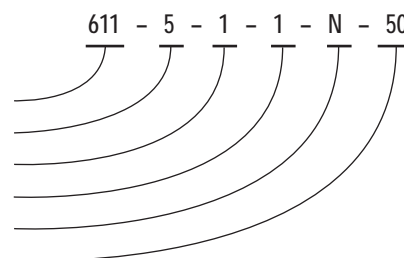

WIRING CODE SCHEMATICS

	Wiring	Cable
4 mA to 20 mA & 4 mA to 20 mA, 2-wire and Hart signal®	+ Supply	Brown
	- Supply	Blue
	Shield	Grey
4 mA to 20 mA x 2 (pressure and temperature)	+ Supply (pressure sensor)	Brown
	- Supply (pressure sensor)	Blue
	+ Supply (temperature sensor)	Green
	- Supply (temperature sensor)	White
	Shield	Grey
0.1 Vdc to 2.5 Vdc, 3 wire	+ Supply	Brown
	- Supply	Blue
	Analog output	Black
	Shield	Grey
0.1 Vdc to 2.5 Vdc x 2 (pressure and temperature)	+ Supply	Brown
	- Supply	Blue
	Analog output (pressure sensor)	Black
	Analog output (temperature sensor)	Green
	Shield	Grey

With protective cap

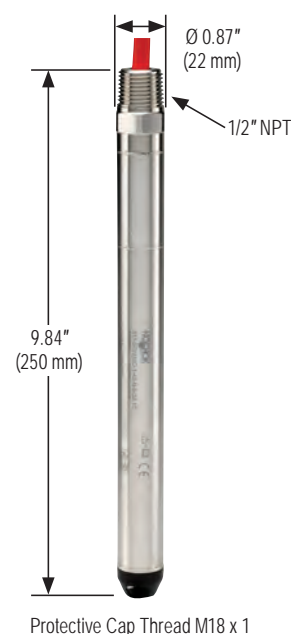



612 SERIES

- Ranges from 0 inH₂O to 50 inH₂O through 0 psig to 1,000 psig
- Current and voltage outputs available
- 316 Stainless Steel, polyamide and polyurethane wetted parts
- CE compliant to suppress RFI, EMI and ESD

APPLICATIONS

- Irrigation
- Tank monitoring
- Water & wastewater
- Well head measurement

SPECIFICATIONS

Output signals	4 mA to 20 mA, 2-wire; 0 Vdc to 5 Vdc and 0 Vdc to 10 Vdc, 3-wire; 0.5 Vdc to 2.5 Vdc, 3-wire
Pressure ranges	0 inH ₂ O to 50 inH ₂ O through 0 psig to 1,000 psig
Accuracy	± 0.25% full scale (BFSL); optional ± 0.125% full scale (BFSL); (includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	≤ ± 0.2% full scale for 1 year, non-accumulating
Response time	≤ 1 ms (between 10% and 90% full scale)
Service life	> 100,000,000 load cycles
Temperature ranges	Compensated 32 °F to 122 °F/0 °C to 50 °C Effect ± 0.01%/ °F for zero and span Media 14 °F to 122 °F / -10 °C to 50 °C Storage -22 °F to 175 °F/-30 °C to 80 °C
Power requirement*	10 Vdc to 30 Vdc (4 mA to 20 mA, 2-wire, 0 Vdc to 5 Vdc, 3-wire) 5 Vdc to 30 Vdc (0.5 Vdc to 2.5 Vdc, 3-wire) 14 Vdc to 30 Vdc (0 Vdc to 10 Vdc, 3-wire)
Load limitations	≤ (VPower-10)/0.020 Amp for 4 mA to 20 mA ≥ 10,000 Ω for 0 Vdc to 10 Vdc, 3-wire ≥ 5,000 Ω for 0 Vdc to 5 Vdc, 3-wire
Proof pressure	2 times range
Burst pressure	4 times range
Measuring element	Cap: Polyamide, 316 Stainless Steel with weighted nosecone Cable: Polyurethane, optional FEP or PVC with double water block
Connection	316 Stainless Steel
Housing material	316 Stainless Steel
Environmental rating	IP68
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity protection, short circuit and optional lightning protection per EN 6100-4-5; 1.5J
Shock	100 g's according to IEC 60068-2-27
Vibration	15 g's according to IEC 60068-2-6
Weight	Approximately 7 oz. with standard nosecone - cable extra

* Unregulated



ORDERING INFORMATION								
SERIES	612							
PRESSURE RANGES	50 inH ₂ O	0 inH ₂ O to 50 inH ₂ O	2	0 psig to 2 psig (4.6 ftH ₂ O)	20	0 psig to 20 psig (46.2 ftH ₂ O)	200	0 psig to 200 psig (461.3 ftH ₂ O)
	100 inH ₂ O	0 inH ₂ O to 100 inH ₂ O	3	0 psig to 3 psig (6.9 ftH ₂ O)	25	0 psig to 25 psig (57.7 ftH ₂ O)	300	0 psig to 300 psig (692.5 ftH ₂ O)
	150 inH ₂ O	0 inH ₂ O to 150 inH ₂ O	5	0 psig to 5 psig (11.5 ftH ₂ O)	30	0 psig to 30 psig (69.2 ftH ₂ O)	350	0 psig to 350 psig (807.9 ftH ₂ O)
	200 inH ₂ O	0 inH ₂ O to 200 inH ₂ O	10	0 psig to 10 psig (23.1 ftH ₂ O)	60	0 psig to 60 psig (138.5 ftH ₂ O)	500	0 psig to 500 psig (1154.2 ftH ₂ O)
	400 inH ₂ O	0 inH ₂ O to 400 inH ₂ O	15	0 psig to 15 psig (34.6 ftH ₂ O)	100	0 psig to 100 psig (230.8 ftH ₂ O)	750	0 psig to 750 psig (1733.3 ftH ₂ O)
	psig = gauge pressure Other ranges available on request				150	0 psig to 150 psig (346.3 ftH ₂ O)	1000	0 psig to 1,000 psig (2311.0 ftH ₂ O)
ACCURACIES	1	±0.25% full scale (BFSL)			2	±0.125% full scale (BFSL)		
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire			5	0 Vdc to 10 Vdc, 3-wire		
	2	0 Vdc to 5 Vdc, 3-wire			11	0.5 Vdc to 2.5 Vdc, 3-wire		
PROCESS CONNECTIONS	N	Nosecone			W	Nosecone w/added weight (1.1 lb.)		
	T	G 1/2 B x 1/2" NPT male with 1/4" NPT female						
ELECTRICAL CONNECTIONS	XX	Standard polyurethane (PUR) cable			38-XX	Optional FEP cable		
	22-XX	Optional water-blocked PVC cable (200+ psi only)						
	NOTE: XX = length of cable in feet.							
OPTIONS	PT1	PT100 RTD *	CBC	Cable Clamp	FE	Filter Element		
	DC	Desiccant Cartridge	LP	Lightning Protection *	JB	Cable Junction Box		

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Not available for PVC cable

EXAMPLE


Series 612 Series
 Pressure range 0 psig to 5 psig
 Accuracy ±0.25% full scale (BFSL)
 Output signal 4 mA to 20 mA, 2-wire
 Process connection Nosecone
 Electrical connection 50' of submersible polyurethane cable

612 - 5 - 1 - 1 - N - 50




2-WIRE WIRING

Wiring	Cable
+ Supply	Red
+ Output	Black

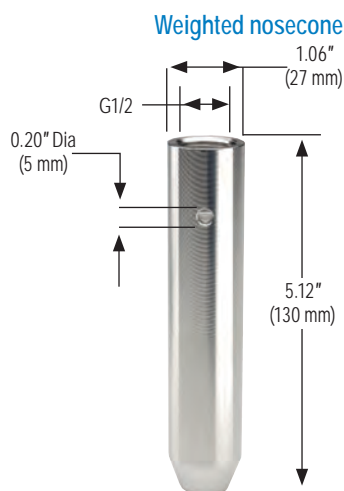

3-WIRE WIRING

Wiring	Cable
+ Supply	Red
Common	Black
+ Output	White

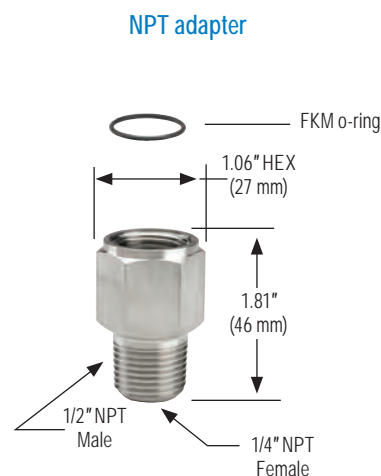

Cage-Protected Submersible



613 SERIES

- Ranges from 0 psi to 5 psi through 0 psi to 300 psi
- Current & voltage outputs available
- 316 Stainless Steel and polyurethane wetted parts
- CE compliant to suppress RFI, EMI and ESD

APPLICATIONS

- Lift stations
- Sewage
- Slurry tanks
- Storm canals
- Water & wastewater
- Wet wells

SPECIFICATIONS

Output signals	4 mA to 20 mA, 2-wire; 0 Vdc to 5 Vdc and 0 Vdc to 10 Vdc, 3-wire; 0.5 Vdc to 2.5 Vdc, 3-wire
Pressure ranges	0 psi to 5 psi through 0 psi to 300 psi
Accuracy	± 0.25% full scale (BFSL); optional ± 0.125% full scale (BFSL); (includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	≤ ± 0.2% full scale for 1 year, non-accumulating
Response time	≤ 1 ms (between 10% and 90% full scale)
Service life	> 100,000,000 full scale cycles
Temperature measurement	Optional PT100, 4-wire per IEC 60751
Temperature ranges	Compensated 32 °F to 122 °F/0 °C to 50 °C Effect ± 0.01%/ °F for zero and span Media 14 °F to 122 °F / -10 °C to 50 °C Storage -22 °F to 175 °F/ -30 °C to 80 °C
Power requirement*	10 Vdc to 30 Vdc (4 mA to 20 mA, 2-wire, 0 Vdc to 5 Vdc, 3-wire) 5 Vdc to 30 Vdc (0.5 Vdc to 2.5 Vdc, 3-wire) 14 Vdc to 30 Vdc (0 Vdc to 10 Vdc, 3-wire)
Load limitations	≤ (VPower-10)/0.020 Amp for 4 mA to 20 mA ≥ 10,000 Ω for 0 Vdc to 10 Vdc, 3-wire ≥ 5,000 Ω for 0 Vdc to 5 Vdc, 3-wire
Proof pressure	2 times range
Burst pressure	4 times range
Measuring element	Cage seal: All 316 Stainless Steel Cable: Polyurethane, optional FEP
Connection	316 Stainless Steel
Housing material	316 Stainless Steel
Environmental rating	IP68
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity protection, short circuit and optional lightning protection per EN 6100-4-5; 1.5J
Shock	100 g's according to IEC 60068-2-27
Vibration	15 g's according to IEC 60068-2-6
Weight	Approximately 3.2 lb. - cable extra

* Unregulated



WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



ORDERING INFORMATION				
SERIES	613			
PRESSURE RANGES	5	0 psi to 5 psi (11.55 ft/H ₂ O)	20	0 psi to 20 psi (46.20 ft/H ₂ O)
	10	0 psi to 10 psi (23.10 ft/H ₂ O)	30	0 psi to 30 psi (69.30 ft/H ₂ O)
	15	0 psi to 15 psi (34.65 ft/H ₂ O)	50	0 psi to 50 psi (115.50 ft/H ₂ O)
ACCURACIES	1	±0.25% full scale (BFSL)	2	±0.125% full scale (BFSL)
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire	5	0 Vdc to 10 Vdc, 3-wire
	2	0 Vdc to 5 Vdc, 3-wire	11	0.5 Vdc to 2.5 Vdc, 3-wire
ELECTRICAL CONNECTIONS	XX	Standard polyurethane (PUR) cable	38-XX	Optional FEP cable
NOTE: XX = length of cable in feet.				
OPTIONS	CBC	Cable Clamp	FE	Filter Element
	DC	Desiccant Cartridge	JB	Cable Junction Box
			LP	Lightning Protection *
			LR	Lifting Ring
			PT1	PT100 RTD *

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Only available with PUR cable

EXAMPLE

Series 613 Series
 Pressure range 0 psi to 5 psi
 Accuracy ±0.25% full scale (BFSL)
 Output signal 4 mA to 20 mA, 2-wire
 Electrical connection 50' of submersible polyurethane cable
 Option Lifting Ring

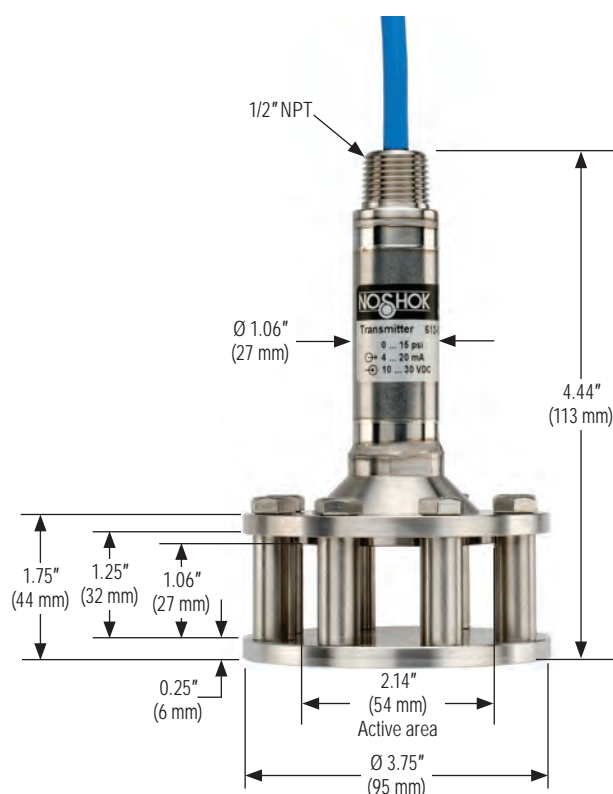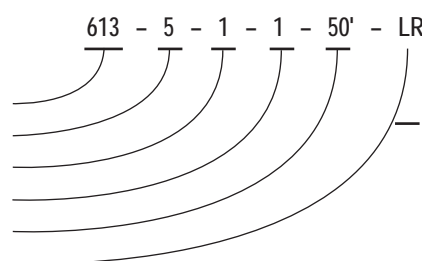

Optional Cable Clamp



Optional Cable Junction Box



Optional Desiccant Cartridge



Optional Filter Element



Optional Lifting Ring



WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

High pressure
model

APPLICATIONS

- Construction
- Hydraulics & pneumatics
- Laboratory & test equipment
- Power generation
- Stamping & forming presses
- Transportation



Also available with our 1800 Series Attachable Loop Indicator. Visit www.noshok.com for more information.

615/616 SERIES

- Vacuum ranges through 0 psig to 145,000 psig; absolute ranges from 0 psia to 15 psia through 0 psia to 300 psia
- Current and voltage outputs available
- 316 and 17-4PH Stainless Steel wetted parts
- CE compliant to suppress RFI, EMI and ESD

SPECIFICATIONS

Output signals	4 mA to 20 mA, 2-wire; 0 Vdc to 5 Vdc, 0 Vdc to 10 Vdc, 1 Vdc to 5 Vdc, 3-wire
Pressure ranges	Vacuum through 0 psig to 145,000 psig Absolute from 0 psia to 15 psia through 0 psia to 300 psia
Accuracy	± 0.25% full scale (BFSL); optional ± 0.125% full scale (BFSL); (includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	≤ ±0.2% full scale for 1 year, non-accumulating
Adjustment	± 10% full scale for zero and span
Response time	Less than 1 ms (between 10% and 90% full scale)
Service life	>100,000,000 load cycles
Temperature ranges	Compensated 32 °F to 175 °F (0 °C to 80 °C) Effect ± 0.01%/ °F for zero and span Media -20 °F to 212 °F (-30 °C to 100 °C) Ambient -15 °F to 175 °F (-10 °C to 80 °C) Storage -40 °F to 212 °F (-40 °C to 100 °C)
Power requirement*	10 Vdc to 30 Vdc (4 mA to 20 mA, 2-wire, 1 Vdc to 5 Vdc, 3-wire, 1 Vdc to 6 Vdc, 3-wire, 0 Vdc to 5 Vdc, 3-wire) 14 Vdc to 30 Vdc (0 Vdc to 10 Vdc, 3-wire, 1 Vdc to 11 Vdc, 3-wire)
Load limitations	≤ (VPower-10)/0.020 Amp for 4 mA to 20 mA ≥ 10,000 Ω for 0 Vdc to 10 Vdc, 3-wire ≥ 5,000 Ω for 0 Vdc to 5 Vdc, 3-wire
Proof pressure	3 times full scale for ranges 0 psi to 2 psi through 0 psi to 200 psi 1.75 times full scale for ranges 0 psi to 300 psi through 0 psi to 10,000 psi 1.5 times full scale for 0 psi to 15,000 psi 1.2 times full scale for ranges 0 psi to 20,000 psi through 0 psi to 145,000 psi
Burst pressure	3.8 times full scale for ranges 0 psi to 2 psi through 0 psi to 200 psi 4 times full scale for ranges 0 psi to 300 psi through 0 psi to 10,000 psi 3 times full scale for 0 psi to 15,000 psi 1.5 times full scale for ranges 0 psi to 20,000 psi through 0 psi to 145,000 psi
Measuring element	316 Stainless Steel for vacuum through 300 psi; 17-4PH Stainless Steel for ≥500 psi
Connection	316 Stainless Steel
Housing material	316 Stainless Steel
Environmental rating	IP65
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity, overvoltage and short circuit protection
Shock	1,000 g's according to IEC 60068-2-27
Vibration	15 g's according to IEC 60068-2-6
Weight	Approximately 7.2 oz.

* Unregulated



WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



ORDERING INFORMATION												
SERIES	615	(Internal diaphragm)			616	(Front flush diaphragm)						
PRESSURE RANGES	30vac	-30 inHg to 0 psig	2	0 psig to 2 psig	150	0 psig to 150 psig	2000	0 psig to 2,000 psig	20000	0 psig to 20,000 psig *	145000	0 psig to 145,000 psig
	30/15	-30 inHg to 15 psig	3	0 psig to 3 psig	200	0 psig to 200 psig	3000	0 psig to 3,000 psig	30000	0 psig to 30,000 psig	15A	0 psia to 15 psia
	30/30	-30 inHg to 30 psig	5	0 psig to 5 psig	300	0 psig to 300 psig	4000	0 psig to 4,000 psig	36000	0 psig to 36,000 psig	30A	0 psia to 30 psia
	30/60	-30 inHg to 60 psig	10	0 psig to 10 psig	500	0 psig to 500 psig	5000	0 psig to 5,000 psig	58000	0 psig to 58,000 psig	60A	0 psia to 60 psia
	30/100	-30 inHg to 100 psig	15	0 psig to 15 psig	600	0 psig to 600 psig	6000	0 psig to 6,000 psig	72000	0 psig to 72,000 psig	100A	0 psia to 100 psia
	30/150	-30 inHg to 150 psig	30	0 psig to 30 psig	750	0 psig to 750 psig	7500	0 psig to 7,500 psig	87000	0 psig to 87,000 psig	150A	0 psia to 150 psia
	30/200	-30 inHg to 200 psig	60	0 psig to 60 psig	1000	0 psig to 1,000 psig	10000	0 psig to 10,000 psig	100000	0 psig to 100,000 psig	200A	0 psia to 200 psia
	30/300	-30 inHg to 300 psig	100	0 psig to 100 psig	1500	0 psig to 1,500 psig	15000	0 psig to 15,000 psig	115000	0 psig to 115,000 psig	300A	0 psia to 300 psia
		psig = gauge pressure	psia = absolute pressure	Other ranges available on request			Note: 616 Series is available for pressure ranges up to 0 psig to 8,000 psig					
ACCURACIES	1	±0.25% full scale (BFSL)			2	±0.125% full scale (BFSL)						
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire			3	1 Vdc to 5 Vdc, 3-wire		NOTE: 0 Vdc to 5 Vdc and 0 Vdc to 10 Vdc outputs are also available in 4-wire configurations for use with other electrical systems.				
	2	0 Vdc to 5 Vdc, 3-wire			5	0 Vdc to 10 Vdc, 3-wire						
PROCESS CONNECTIONS	615:	2	1/4" NPT male			6	9/16" -18 UNF 2B high pressure cone ** (Standard on 30,000 to 120,000 psig)			8	1/2" NPT male	
	616:	11	G 1/2 B (Pressure ranges ≥ 0 psig to 30 psig)			13	G 1 B (Pressure ranges ≤ 0 psig to 30 psig)			Other connections available upon request		
ELECTRICAL CONNECTIONS	1	36" cable (connected to option 8)			8	Hirschmann (DIN EN 175301-803 Form A)			25	M12 x 1 (4-pin)		
	3	6-pin Bendix			14	Hirschmann type with 1/2" NPT female conduit			36	Integral 36" cable		
	6	1/2" NPT conduit w/ 36" cable										
OPTIONS	ST8	SS Threaded Orifice			G1	G 1 Weld-on adapter (616 only)			G½	G 1/2 Weld-on adapter (616 only)		

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Not available with 1/4" NPT

** Equivalent to F250C Parker Autoclave

EXAMPLE

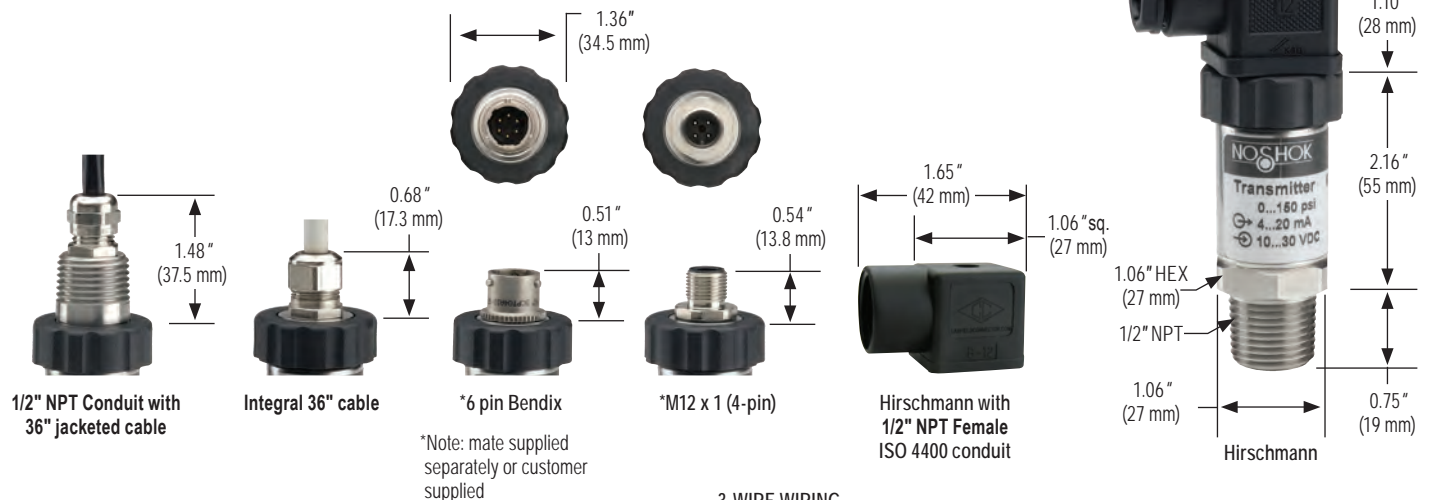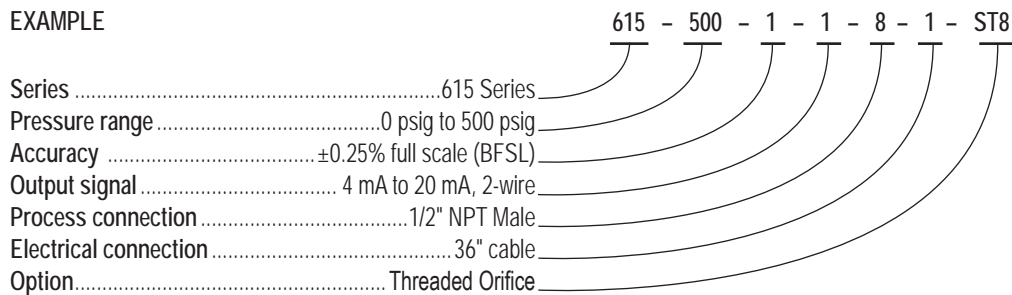

2-WIRE WIRING

	Hirschmann	Cable	M12	Bendix
+ Supply	1	Red	1	A
+ Output	2	Black	3	B

3-WIRE WIRING

	Hirschmann	Cable	M12	Bendix
+ Supply	1	Red	1	A
Common	2	Black	3	B
+ Output	3	White	4	C

NOTE
See 621/622 Series
for G1/2B and G1B
Front Flush Process
Connection Dimensions
pg. 85



640 SERIES

- Vacuum ranges through 0 psig to 15,000 psig; absolute ranges from 0 psia to 15 psia through 0 psia to 300 psia
- Standard 4 mA to 20 mA output
- 316 and 17-4PH Stainless Steel wetted parts
- CE compliant to suppress RFI, EMI and ESD

APPLICATIONS

- Aerospace equipment
- Laboratory & test equipment
- Precision measurement

SPECIFICATIONS

Output signals	4 mA to 20 mA, 2-wire; 0 Vdc to 5 Vdc and 0 Vdc to 10 Vdc, 3-wire
Pressure ranges	Vacuum through 0 psig to 15,000 psig Absolute from 0 to 15 psia through 0 psia to 300 psia
Accuracy	±0.05% full scale (BFSL); optional ±0.025% full scale (BFSL); (includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	≤ ±0.1% full scale; 5 psi ±0.2% full scale per year
Response time	< 300 ms (between 10% to 90% full scale)
Service life	> 100,000,000 load cycles
Temperature ranges	Compensated 32 °F to 160 °F (0 °C to 70 °C) Effect: ±0.005% °F (32 °F to 50 °F) to zero point and pressure range no effect (50 °F to 104 °F) for zero and span ±0.005%/ °F (104 °F to 158 °F) to zero point and pressure range Media - 5 °F to 160 °F (-20 °C to 70 °C) Ambient 32 °F to 160 °F (0 °C to 70 °C) Storage -5 °F to 160 °F (-20 °C to 70 °C)
Power requirement*	9 Vdc to 30 Vdc (4 mA to 20 mA, 2-wire, 0 Vdc to 5 Vdc, 3-wire) 14 Vdc to 30 Vdc (0 Vdc to 10 Vdc, 3-wire) Voltage supply via RS232 interface (RS232)
Load limitations	≤ (VPower-10)/0.020 Amp for 4 mA to 20 mA ≥ 10,000 Ω for 0 Vdc to 10 Vdc, 3-wire ≥ 5,000 Ω for 0 Vdc to 5 Vdc, 3-wire
Proof pressure	3 times full scale for ranges 0 psi to 5 psi through 0 psi to 200 psi 2 times full scale for ranges 0 psi to 300 psi through 0 psi to 10,000 psi 1.5 times full scale for 0 psi to 15,000 psi
Burst pressure	4 times full scale for ranges 0 psi to 5 psi through 0 psi to 200 psi 4 times full scale for ranges 0 psi to 300 psi through 0 psi to 10,000 psi 3 times full scale for 0 psi to 15,000 psi
Measuring element	316 Stainless Steel for vacuum through 300 psi; 17-4PH Stainless Steel for ≥500 psi
Connection	316 Stainless Steel
Housing material	316 Stainless Steel
Environmental rating	IP65
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity, overvoltage and short circuit protection
Shock	100 g's according to IEC 60068-2-27
Vibration	15 g's according to IEC 60068-2-6
Weight	Approximately 11 oz.

* Unregulated



ORDERING INFORMATION										
SERIES	640									
PRESSURE RANGES	30vac	-30 inHg to 0 psig	30/300	-30 inHg to 300 psig	150	0 psig to 150 psig	3000	0 psig to 3,000 psig	30A	0 psia to 30 psia
	30/15	-30 inHg to 15 psig	5	0 psig to 5 psig	200	0 psig to 200 psig	5000	0 psig to 5,000 psig	60A	0 psia to 60 psia
	30/30	-30 inHg to 30 psig	10	0 psig to 10 psig	300	0 psig to 300 psig	6000	0 psig to 6,000 psig	100A	0 psia to 100 psia
	30/60	-30 inHg to 60 psig	15	0 psig to 15 psig	500	0 psig to 500 psig	7500	0 psia to 7,500 psig	150A	0 psia to 150 psia
	30/100	-30 inHg to 100 psig	30	0 psig to 30 psig	750	0 psig to 750 psig	10000	0 psia to 10,000 psig	200A	0 psia to 200 psia
	30/150	-30 inHg to 150 psig	60	0 psig to 60 psig	1000	0 psig to 1,000 psig	15000	0 psia to 15,000 psig	300A	0 psia to 300 psia
	30/200	-30 inHg to 200 psig	100	0 psig to 100 psig	2000	0 psig to 2,000 psig	15A	0 psia to 15 psia		
psig = gauge pressure psia = absolute pressure Other ranges available on request										
ACCURACIES	1	±0.05% full scale (BFSL)				2	±0.025% full scale (BFSL)			
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire analog				5	0 Vdc to 10 Vdc, 3-wire analog			
	2	0 Vdc to 5 Vdc, 3-wire analog								
PROCESS CONNECTIONS	2	1/4"NPT male				8	1/2"NPT male; other connections available upon request			
ELECTRICAL CONNECTIONS	1	54" Integral cable				25	M12 x 1 (4-pin)			
OPTION	ST8	Threaded Orifice								

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

EXAMPLE

		640	-	3000	-	1	-	1	-	8	-	25	-	ST8
Series	640 Series													
Pressure range	0 psig to 3,000 psig													
Accuracy	±0.05% full scale (BFSL)													
Output signal	4 mA to 20 mA, 2-wire analog													
Process connection	1/2" NPT Male													
Electrical connection	M12 x 1 (4-pin)													
Option	Threaded Orifice													



2-WIRE WIRING

Wiring	M12	Cable
+ Supply	1	Brown
+ Output	3	Blue

3-WIRE WIRING

Wiring	M12	Cable
+ Supply	1	Brown
Common	3	Blue
+ Output	4	Black



660 SERIES

- Ranges from 0 psig to 200 through 0 psig to 15,000 psig
- Current & voltage outputs available
- Stainless Steel wetted parts
- 1.0 mm standard orifice size for improved performance in dynamic applications
- CE compliant to suppress RFI, EMI and ESD

APPLICATIONS

- Hydraulics & pneumatics
- Mobile hydraulics
- Power generation
- Pumps & compressors
- Refrigeration controls

SPECIFICATIONS

Output signals	4 mA to 20 mA 2-wire, 1 Vdc to 5 Vdc 3-wire; 0.1 Vdc to 10 Vdc, 3-wire
Pressure ranges	0 psig to 200 psig through 0 psig to 15,000 psig
Accuracy	±0.25% full scale (BFSL); (Includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	≤ ±2% full scale for 1 year, non-accumulating
Response time	<2 ms (between 10% and 90% full scale)
Service life	> 100,000,000 load cycles
Temperature ranges	Compensated -4 °F to 185 °F (-20 °C to 85 °C) Zero effect ±0.01% full scale/ °F Span effect ±0.01% full scale/ °F Media -13 °F to 185 °F (-40 °C to 100 °C); -40 °F to 257 °F (-40 °C to 125 °C) available on request Ambient -4 °F to 185 °F (-25 °C to 85 °C) Storage -40 °F to 212 °F (-40 °C to 100 °C)
Power requirement*	10 Vdc to 36 Vdc (4 mA to 20 mA, 2-wire) 8 Vdc to 36 Vdc (1 Vdc to 5 Vdc, 3-wire) 14 Vdc to 36 Vdc (0.1 Vdc to 10 Vdc, 3-wire)
Load limitations	≤ (VPower-10)/0.020 Amp for 4 mA to 20 mA ≥ 10,000 Ω for 1 Vdc to 10 Vdc, 3-wire ≥ 5,000 Ω for 1 Vdc to 5 Vdc, 3-wire
Proof pressure	2 times full scale for ranges 0 psi to 200 psi through 0 psi to 10,000 psi 1.5 times full scale for 0 psi to 15,000 psi range
Burst pressure	9 times full scale for 0 psi to 200 psi through 0 psi to 1,000 psi 3 times full scale for ranges 0 to 3,000 psi through 0 psi to 15,000 psi
Measuring element	17-4PH Stainless Steel
Connection	316 Stainless Steel
Housing material	316 Stainless Steel
Environmental rating	IP65; IP67 M12x1 electrical connection for pressure ranges 0 psig to 1,500 psig or higher
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity, over-voltage and short circuit protection
Shock	1,000 g's according to IEC 60068-2-27
Vibration	20 g's according to IEC 60068-2-6
Weight	Approximately 1.75 oz.

* Unregulated




ORDERING INFORMATION				
SERIES	660			
PRESSURE RANGES	200	0 psig to 200 psig	500	0 psig to 500 psig
	300	0 psig to 300 psig	1000	0 psig to 1,000 psig
			3000	0 psig to 3,000 psig
			5000	0 psig to 5,000 psig
			10000	0 psig to 10,000 psig
			15000	0 psig to 15,000 psig
psig = gauge pressure Other ranges available on request				
ACCURACY	1	±0.25% full scale (BFSL)		
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire	3	1 Vdc to 5 Vdc, 3-wire
			27	0.1 Vdc to 10 Vdc, 3-wire
PROCESS CONNECTIONS	2	1/4" NPT male		
ELECTRICAL CONNECTIONS	1	36" cable (connected to option 7)	7	Mini-Hirschmann (DIN EN 175301-803 Form C)
			25	M12 x 1 (4-pin)

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

EXAMPLE

Series660 Series
 Pressure range0 psig to 500 psig
 Accuracy±0.25% full scale (BFSL)
 Output signal 4 mA to 20 mA, 2-wire
 Process connection1/4" NPT Male
 Electrical connectionM12 x 1 (4-pin)

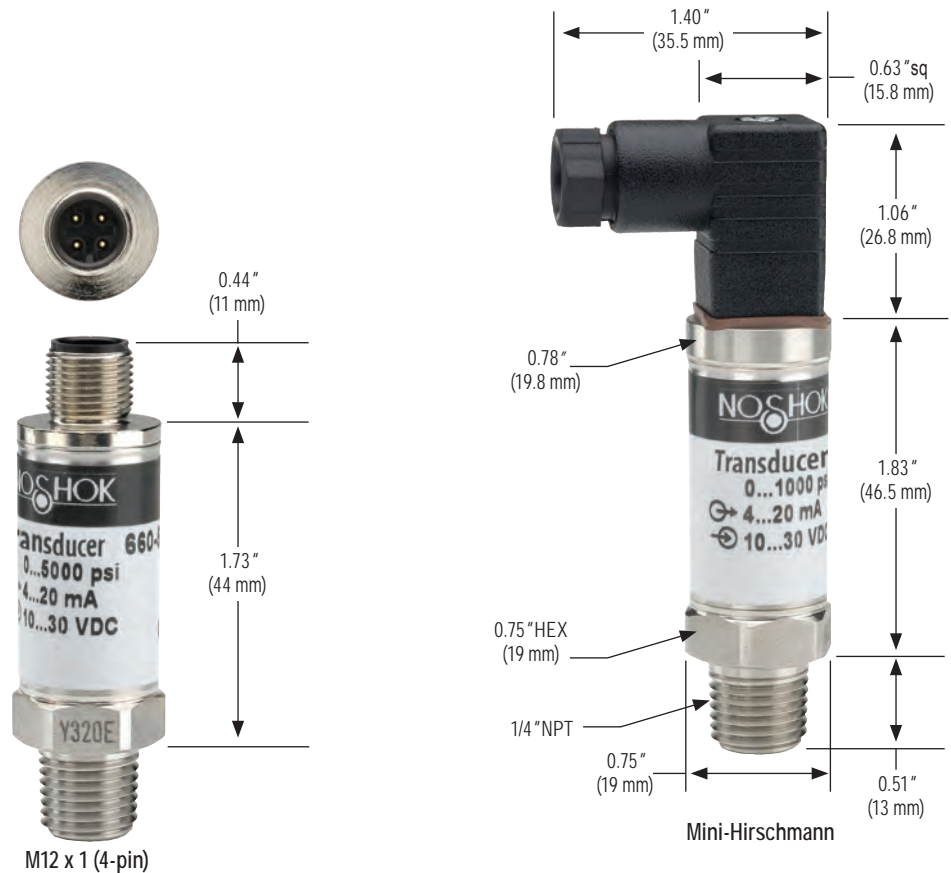

2-WIRE WIRING

Wiring	M12	Mini-Hirschmann	Cable
+ Supply	1	1	Red
+ Output	3	2	Black

3-WIRE WIRING

Wiring	M12	Mini-Hirschmann	Cable
+ Supply	1	1	Red
Common	3	2	Black
+ Output	4	3	White



APPLICATIONS

- Hydraulics & pneumatics
- Power generation
- Pumps & compressors
- Stamping & forming presses
- Water & wastewater

800 SERIES

- Compound and standard ranges from 0 psig to 10 psig through 0 psig to 7,500 psig
- 316L Stainless steel wetted parts
- Current and voltage outputs available
- 7 different output configurations available
- Display and electrical connection can be rotated independently
- CE compliant to suppress RFI, EMI and ESD
- RoHS compliant

SPECIFICATIONS

Pressure ranges	Compound and standard ranges from 0 psig to 10 psig through 0 psig to 7,500 psig
Switching parameters	Individually adjustable via external control keys
Number	1 or 2 (PNP or NPN)
Function	N.O., N.C., window, hysteresis (freely adjustable)
Contact rating	250 mA max.
Response time	≤5 ms
Accuracy	≤ 0.5 % of span
Switch point	.25 to 100% of full scale
Hysteresis	Fully adjustable
Transmitter parameters	
Output signal	4 mA to 20 mA or 0 Vdc to 10 Vdc; programmable and freely adjustable
Accuracy	≤±0.5% of span including non-linearity, hysteresis, zero offset and end value deviation (corresponds to measured error per IEC 61298-2)
Non-repeatability	< 0.1% of span (IEC 61298-2)
Adjustment	Freely scalable within the range of 5:1
Service life	100,000,000 load cycles
Temperature ranges	Compensated 32 °F to 176 °F (0 °C to 80 °C) Media -4 °F to 185 °F (-20 °C to 85 °C) Ambient -4 °F to 176 °F (-20 °C to 80 °C) Storage -4 °F to 158 °F (-20 °C to 70 °C)
Display	14 segment-LED, red 4-digit, height 0.35"
Power requirement*	15 - 35 Vdc
Current consumption	Max. 45 mA for versions without 4-20 mA output signal, Max. 70 mA for versions with 4-20 mA output signal, Total consumption max. 600 mA including switching current
Proof pressure	2 times full scale
Measuring element	<150 psi: 316L Stainless steel ≥150 psi: 316L, PH grade Stainless steel
Housing material	304 Stainless steel
Connection	316 stainless steel
Environmental rating	IP65 and IP67 per IEC 60529
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Protected against reverse polarity, over-voltage and short circuit
Shock	> 50 g's according to IEC 60068-2-27
Vibration	> 20 g's according to IEC 60068-2-6
Weight	Approx 0.49 lb.

* Unregulated



ORDERING INFORMATION								
SERIES	800	304 Stainless steel housing						
SWITCH FUNCTIONS	1	2 N.O. or N.C. (PNP or NPN)			5	2 N.O. or N.C. switch (PNP/NPN) with 0 Vdc to 10 Vdc 3-wire output *		
	2	1 N.O. or N.C. (PNP or NPN) with 4 mA to 20 mA 3-wire analog output			6	1 N.O. or N.C. switch (PNP/NPN) with 4 mA to 20 mA/0 Vdc to 10 Vdc 3-wire output 2 **		
	3	1 N.O. or N.C. (PNP or NPN) with 0 Vdc to 10 Vdc 3-wire output			7	2 N.O. or N.C. switch (PNP/NPN) with 4 mA to 20 mA/0 Vdc to 10 Vdc 3-wire output *. **		
	4	2 N.O. or N.C. (PNP or NPN) with 4 mA to 20 mA analog output*						
PROCESS CONNECTIONS	2	1/4" NPT male	10	G 1/4 B male	45	7/16-20 SAE J514 FIG 34B (Non-Adjustable)		
	8	1/2" NPT male	11	G 1/2 B male				
ADJUSTABLE RANGES (Max. working pressure)	14.5vac	-14.5 psig to 0 psig	15	0 psig to 15 psig	1000	0 psig to 1,000 psig	30A	0 psia to 30 psia
	14.5/15	-14.5 psig to 15 psig	25	0 psig to 25 psig	1500	0 psig to 1,500 psig	50A	0 psia to 50 psia
	14.5/30	-14.5 psig to 30 psig	30	0 psig to 30 psig	2000	0 psig to 2,000 psig	100A	0 psia to 100 psia
	14.5/50	-14.5 psig to 50 psig	50	0 psig to 50 psig	3000	0 psig to 3,000 psig	160A	0 psia to 160 psia
	14.5/100	-14.5 psig to 100 psig	100	0 psig to 100 psig	5000	0 psig to 5,000 psig	200A	0 psia to 200 psia
	14.5/160	-14.5 psig to 160 psig	160	0 psig to 160 psig	7500	0 psig to 7,500 psig	300A	0 psia to 300 psia
	14.5/200	-14.5 psig to 200 psig	200	0 psig to 200 psig	10A	0 psia to 10 psia		
	14.5/300	-14.5 psig to 300 psig	300	0 psig to 300 psig	15A	0 psia to 15 psia		
	10	0 psig to 10 psig	500	0 psig to 500 psig	25A	0 psia to 25 psia		
ELECTRICAL CONNECTIONS	2	M12 x 1 (4-pin)		3	M12 x 1 (5-pin), 2 switch and analog output			
OPTIONS	ST8	Threaded Orifice						




Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Available only with a M12 x 1 (5-pin) connector

** Can switch between 4 mA to 20 mA / 0 Vdc to 10 Vdc

EXAMPLE

Series 800 Series
 Switch function..... 2 N.O. or N.C. (PNP or NPN)
 Process connection 1/4" NPT Male
 Adjustable range 0 psig to 160 psig
 Electrical connection M12 x 1 (4-pin)
 Option..... Threaded Orifice

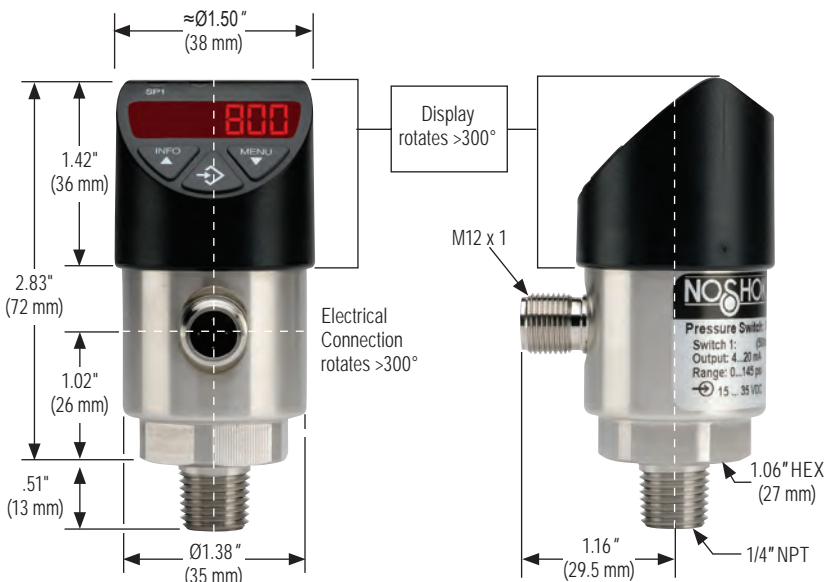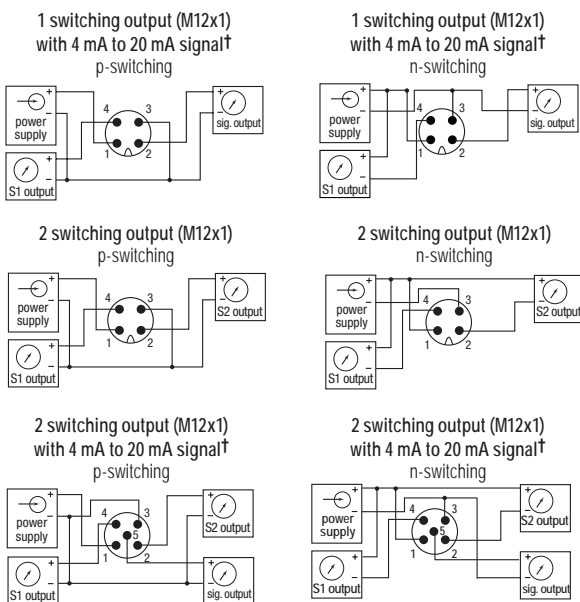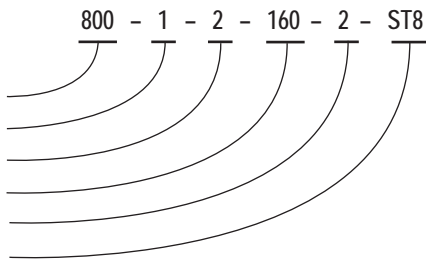

† Also applies to 0 Vdc to 10 Vdc output



300 SERIES

- Ranges from 0 psig to 15 through 0 psig to 10,000 psig; absolute ranges from 0 psia to 15 psia through 0 psia to 300 psia
- Current and voltage outputs available
- 316 and 13-8PH Stainless Steel wetted parts
- RoHS compliant
- CE compliant to suppress RFI, EMI and ESD

APPLICATIONS

- HVAC
- Hydraulics & pneumatics
- Injection molding machines
- Railroad equipment
- Stamping & forming presses

SPECIFICATIONS

Output signals	4 mA to 20 mA, 2-wire; 0 Vdc to 5 Vdc, 3-wire; 1 Vdc to 5 Vdc, 3-wire; 0 Vdc to 10 Vdc, 3-wire; 0.5 Vdc to 4.5 Vdc ratiometric, 3-wire
Pressure ranges	0 psig to 15 psig through 0 psig to 10,000 psig Absolute from 0 psia to 15 psia through 0 psia to 300 psia
Accuracy	±0.5% full scale (BFS), (includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	≤ ±0.2% full scale per year, non-accumulating
Response time	≤ 4 ms (between 10% and 90% full scale)
Service life	> 100,000,000 load cycles
Temperature ranges	Compensated 32 °F to 176 °F (0 °C to 80 °C) Media 32 °F to 176 °F (0 °C to 80 °C) Ambient 32 °F to 176 °F (0 °C to 80 °C) Storage -4 °F to 176 °F (0 °C to 80 °C)
Power requirement*	8 Vdc to 30 Vdc (4 mA to 20 mA, 2-wire, 0 Vdc to 5 Vdc, 3-wire, 1 Vdc to 5 Vdc, 3-wire, 0.5 Vdc to 4.5 Vdc, 3-wire) 14 Vdc to 30 Vdc (0 Vdc to 10 Vdc, 3-wire) 5 Vdc ± 10% (0.5 Vdc to 4.5 Vdc ratiometric, 3-wire)
Load limitations	≤ (VPower-10)/0.020 Amp for 4 mA to 20 mA output ≤ 5,000 Ω for 1 Vdc to 5 Vdc output ≤ 10,000 Ω for 0 Vdc to 10 Vdc output ≤ 4,500 Ω for 0.5 Vdc to 4.5 Vdc output
Proof pressure	2 times full scale
Burst pressure	6 times full scale
Measuring element	316 Stainless Steel for absolute through 150 psi 13-8PH Stainless Steel for ≥150 psi
Connection	316 Stainless Steel
Housing material	316 Stainless Steel
Environmental rating	IP65 to IP67 depending on electrical connection
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity, over-voltage and short circuit protection
Shock	500 g's according to IEC 60068-2-27
Vibration	10 g's according to IEC 60068-2-6
Weight	Approximately 2.8 oz.

* Unregulated



ORDERING INFORMATION					
SERIES	300				
PRESSURE RANGES	30inH ₂ O-vac	-30 inH ₂ O to 0 psig	1 0 psig to 1 psig	500 0 psig to 500 psig	10000 0 psig to 10,000 psig
	30vac	-30 inHg to 0 psig	5 0 psig to 5 psig	750 0 psig to 750 psig	15A 0 psia to 15 psia
	30/15	30 inHg to 15 psig	15 0 psig to 15 psig	1000 0 psig to 1,000 psig	30A 0 psia to 30 psia
	30/30	30 inHg to 30 psig	30 0 psig to 30 psig	1500 0 psig to 1,500 psig	60A 0 psia to 60 psia
	30/60	30 inHg to 60 psig	60 0 psig to 60 psig	2000 0 psig to 2,000 psig	100A 0 psia to 100 psia
	30/100	30 inHg to 100 psig	100 0 psig to 100 psig	3000 0 psig to 3,000 psig	150A 0 psia to 150 psia
	30/160	30 inHg to 160 psig	150 0 psig to 150 psig	5000 0 psig to 5,000 psig	200A 0 psia to 200 psia
	30/200	30 inHg to 200 psig	200 0 psig to 200 psig	6000 0 psig to 6,000 psig	300A 0 psia to 300 psia
	30/300	30 inHg to 300 psig	300 0 psig to 300 psig	7500 0 psig to 7,500 psig	
psig = gauge pressure psia = absolute pressure Other ranges available upon request.					
ACCURACIES	1 ±0.5% full scale (BFSL)				
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire	5	0 Vdc to 10 Vdc, 3-wire	
	2	0 Vdc to 5 Vdc, 3-wire	13	0.5 Vdc to 4.5 Vdc, 3-wire (ratiometric)	
PROCESS CONNECTIONS	2	1/4" NPT male	10	G 1/4 B	45 7/16-20 SAE J514 FIG 34B (Non-Adjustable)
	8	1/2" NPT male	11	G 1/2 B	
ELECTRICAL CONNECTIONS	1	36" cable (connected to option 8)		8 Hirschmann (DIN EN 175301-803 form A)	25 M12 x 1 (4-pin)
	7	Mini-Hirschmann (DIN EN 175301-803 form C)		14 Hirschmann type with 1/2" NPT female conduit	36 6' Integral cable
OPTION	ST8 Threaded Orifice (0.3 mm)				

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

EXAMPLE

Series	300 Series	300	-	500	-	1	-	1	-	2	-	8	-	ST8
Pressure range	0 psig to 500 psig													
Accuracy	±0.50% full scale (BFSL)													
Output signal	4 mA to 20 mA, 2-wire													
Process connection	1/4" NPT Male													
Electrical connection	Hirschmann													
Option	Threaded Orifice													



Integral cable




Mini-Hirschmann



*M12 x 1 (4-pin)

* Note: (mate supplied separately)

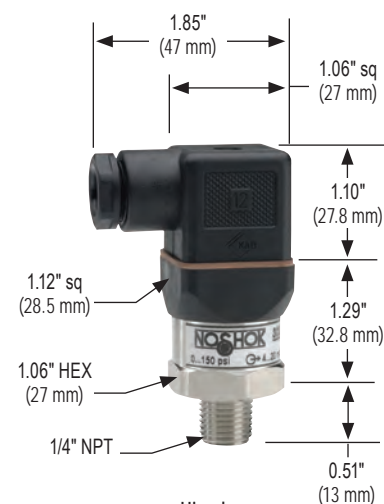

Hirschmann

2-WIRE WIRING			
Wiring	M12	Hirschmann	Cable
+ Supply	1	1	Brown
+ Output	3	2	Blue

3-WIRE WIRING			
Wiring	M12	Hirschmann	Cable
+ Supply	1	1	Brown
Common	3	2	Blue
+ Output	4	3	White



650 SERIES

- Ranges from 0 psig to 100 psig through 0 psig to 8,000 psig
- Current and voltage outputs available
- Stainless Steel wetted parts
- CE compliant to suppress RFI, EMI and ESD

APPLICATIONS

- Hydraulics & pneumatics
- Mobile hydraulics
- Pumps & compressors
- Refrigeration controls
- Transportation

SPECIFICATIONS

Output signals	4 mA to 20 mA 2-wire, or 1 Vdc to 5 Vdc 3-wire
Pressure ranges	0 psig to 100 psig through 0 psig to 8,000 psig
Accuracy	±0.50% full scale (BFSL) (Includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	±0.2% full scale for 1 year, non-accumulating
Response time	< 5 ms (between 10% and 90% full scale); restrictor port I.D. to dampen pulsations
Service life	> 100,000,000 load cycles
Temperature ranges	Compensated 32 °F to 176 °F (0 °C to 80 °C) Zero effect ±0.008% full scale/ °F Span effect ±0.008% full scale/ °F Media -40 °F to 257 °F (-40 °C to 125 °C) Ambient -40 °F to 212 °F (-40 °C to 100 °C) Storage -40 °F to 248 °F (-40 °C to 120 °C)
Power requirement*	8 Vdc to 36 Vdc (4 mA to 20 mA, 2-wire, 0 Vdc to 5 Vdc, 3-wire, 1 Vdc to 5 Vdc, 3-wire, 0.5 Vdc to 4.5 Vdc, 3-wire) 14 Vdc to 36 Vdc (0 Vdc to 10 Vdc, 3-wire) 5 Vdc ± 10% (0.5 Vdc to 4.5 Vdc ratiometric, 3-wire)
Load limitations	≤ (VPower-10)/0.020 amp for 4 mA to 20 mA output ≤ 5,000 Ω for 1 Vdc to 5 Vdc output ≤ 10,000 Ω for 0 Vdc to 10 Vdc output ≤ 4,500 Ω for 0.5 Vdc to 4.5 Vdc output
Proof pressure	2 times full scale
Burst pressure	8 times full scale for ranges 0 psi to 100 psi through 0 psi to 1,500 psi 4 times full scale for ranges 0 psi to 2,000 psi through 0 psi to 8,000 psi
Measuring element	17-4PH Stainless Steel
Connection	316 Stainless Steel
Housing material	PBT - fiber reinforced plastic
Environmental rating	IP67 for M12x1 (4-pin) electrical connection and Metri-Pack connection; IP69K (steam jet cleaning) for cable connection
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity, over-voltage and short circuit protection
Shock	500 g's according to IEC 60068-2-27
Vibration	20 g's according to IEC 60068-2-6
Weight	Approximately 2.5 oz.

* Unregulated




ORDERING INFORMATION									
SERIES	650								
PRESSURE RANGES	100	0 psig to 100 psig		300	0 psig to 300 psig		600	0 psig to 600 psig	
	150	0 psig to 150 psig		400	0 psig to 400 psig		750	0 psig to 750 psig	
	200	0 psig to 200 psig		500	0 psig to 500 psig		1000	0 psig to 1,000 psig	
	psig = gauge pressure		Other ranges available on request						
ACCURACY	1	±0.5% full scale (BFSL)							
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire		3	1 Vdc to 5 Vdc, 3-wire		5	0 Vdc to 10 Vdc, 3-wire	
PROCESS CONNECTIONS	2	1/4" NPT male							
	10	G1/4B male		24	7/16-20 2B Schrader		45	7/16-20 SAE J514 FIG 34B (Non-Adjustable)	
ELECTRICAL CONNECTIONS	25	M12 x 1 (4-pin)		36	18" Integral cable IP67		45	AMP Superseal 1.5	
	34	Metri-Pack 150 series		39	18" Integral cable IP69K		46	Deutsch (3-pin) DT04-3P	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for minimum quantity requirements and delivery information.

EXAMPLE

Series650 Series
 Pressure range0 psig to 500 psig
 Accuracy±0.5% full scale
 Output signal4 mA to 20 mA, 2-wire
 Process connection1/4" NPT Male
 Electrical connectionM12 x 1 (4-pin)

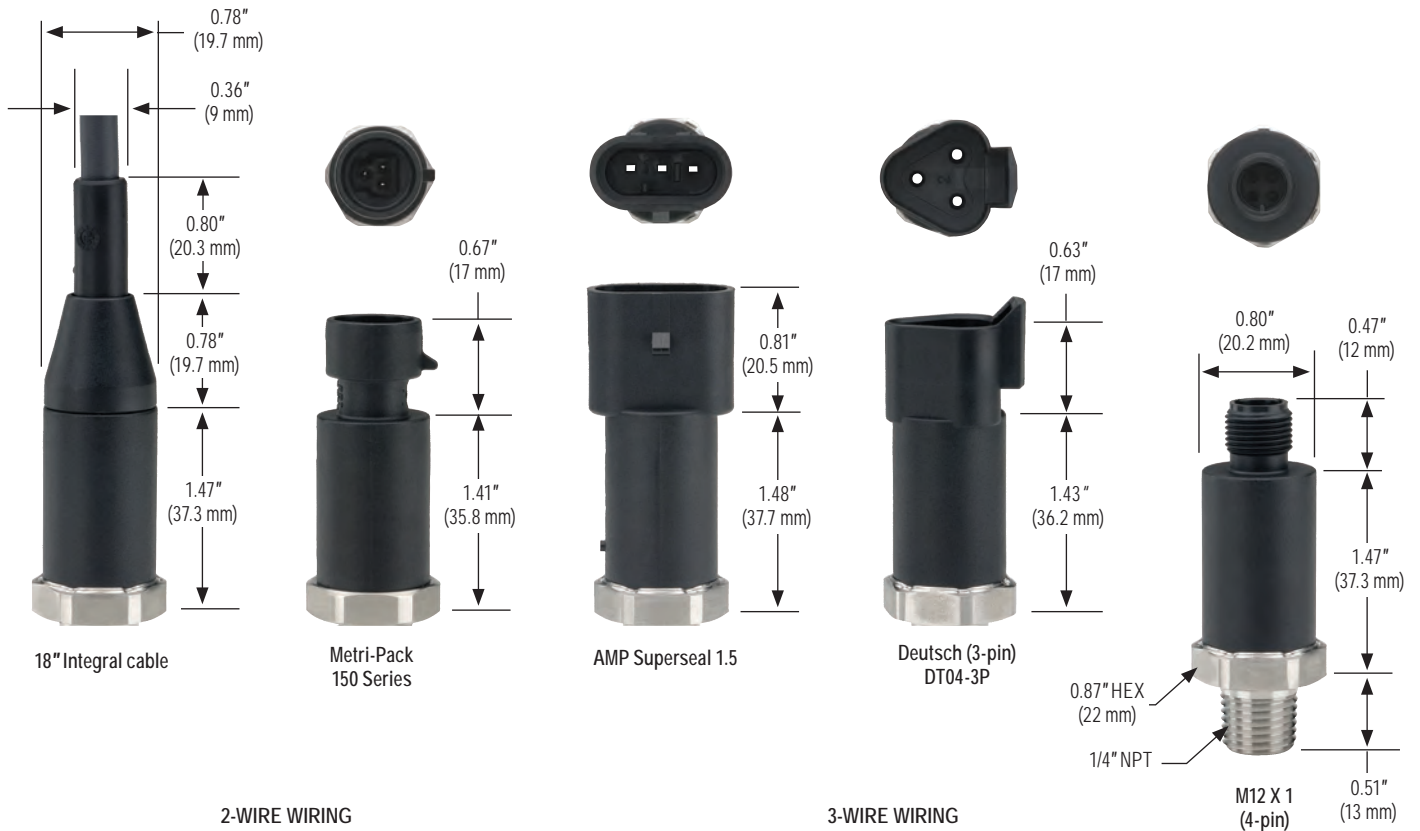

2-WIRE WIRING

Wiring	Cable	M12	Metri-Pack	AMP Superseal	Deutsch DT04-3P
+ Supply	Brown	1	B	3	A
+ Output	Black	3	A	1	B

3-WIRE WIRING

Wiring	Cable	M12	Metri-Pack	AMP Superseal	Deutsch DT04-3P
+ Supply	Brown	1	B	3	A
Common	Green	3	A	1	B
+ Output	White	4	C	2	C



621/622 SERIES

- Vacuum and compound ranges through 0 psig to 15,000 psig; absolute ranges from 0 psia to 15 psia through 0 psia to 100 psia
- Current and voltage outputs available
- 316 Stainless Steel and Elgiloy wetted parts
- CE compliant to suppress RFI, EMI and ESD
- NACE MR0175/ISO 15156 compliant
- NSI/ISA-12.27.01-2003 approved single seal

SPECIFICATIONS

Output signals	4 mA to 20 mA, 2-wire; 1 Vdc to 5 Vdc, 3-wire; 0.5 Vdc to 4.5 Vdc, 3-wire	
Pressure ranges	Vacuum through 0 psi to 15,000 psi Absolute from 0 psia to 15 psia through 0 psia to 100 psia	
Accuracy	±0.25% full scale (BFSL) (Includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)	
Stability	≤±0.2% full scale for 1 year, non-accumulating	
Response time	≤1 ms (between 10% and 90% full scale)	
Service life	>100,000,000 load cycles	
Temperature ranges	Compensated	32 °F to 176 °F (0 °C to 80 °C)
	Zero effect	±0.011% full scale/ °F
	Span effect	±0.011% full scale/ °F
	Media	T6: -40 °F to 131 °F (-40 °C to 55 °C) T5: -40 °F to 158 °F (-40 °C to 70 °C) T4: -40 °F to 212 °F (-40 °C to 100 °C)
Ambient	T6:	-40 °F to 140 °F (-40 °C to 60 °C)
	T5:	-40 °F to 167 °F (-40 °C to 75 °C)
	T4:	-40 °F to 221 °F (-40 °C to 105 °C)
Storage	-40 °F to 221 °F (-40 °C to 105 °C)	
Power requirement*	10 Vdc to 30 Vdc (4 mA to 20 mA, 2-wire)	
	6 Vdc to 30 Vdc (1 Vdc to 5 Vdc, 3-wire, 0.5 Vdc to 4.5 Vdc, 3-wire)	
	14 Vdc to 30 Vdc (0 Vdc to 10 Vdc, 3-wire)	
Load limitations	≤ (VPower-10)/0.020 Amp for 4 mA to 20 mA ≥ 10,000 Ω for 1 Vdc to 5 Vdc, 3-wire	
Proof pressure	3 times full scale for ranges 0 psi to 15 psi through 0 psi to 200 psi 1.75 times full scale for ranges 0 psi to 300 psi through 0 psi to 10,000 psi 1.5 times full scale for 0 psi to 15,000 psi	
Burst pressure	3.8 times full scale for ranges 0 psi to 15 psi through 0 psi to 200 psi 4 times full scale for ranges 0 psi to 300 psi through 0 psi to 10,000 psi 3 times full scale for 0 psi to 15,000 psi	
Measuring element	621 Series is 316 Stainless Steel for ranges up through 0 psi to 300 psi, 316 Stainless Steel with Elgiloy ranges 0 psig to 500 psig and higher; 622 Series is 316 Stainless Steel with NBR o-ring; (FKM o-ring optional)	
Connection	316 Stainless Steel	
Housing material	316 Stainless Steel	
Environmental rating	IP67	
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection	
Electrical protection	Reverse polarity, over-voltage and short circuit protected	
Shock	1,000 g's according to IEC 60068-2-27	
Vibration	20 g's according to IEC 60068-2-6	
Weight	Approximately 12 oz.	

* Unregulated

APPLICATIONS

- Chemical processing
- Gas pressure measurement
- Oil field & offshore
- Mining
- Well head measurement

NOSHOK 621 and 622 Series transmitters are Factory Mutual and Canadian Standards Association approved for use in hazardous location applications as follows:

Explosion-proof with entity approved for: Class I, Division 1, Groups A, B, C and D. Dust Ignition-proof with entity approval for class II/III, Division 1, Groups E, F and G. Maximum electrical ratings 30V, 20 mA.

CE compliant with pressure equipment directive 2014/68/EU.

ANSI/ISA-12.27.01, Approved single seal.



ORDERING INFORMATION				
SERIES	621	Stainless Steel threaded connection	622	316 Stainless Steel flush diaphragm
PRESSURE RANGES	30vac	-30 inHg to 0 psig	5	0 psig to 5 psig
	30/30	-30 inHg to 30 psig	10	0 psig to 10 psig
	30/60	-30 inHg to 60 psig	15	0 psig to 15 psig
	30/100	-30 inHg to 100 psig	30	0 psig to 30 psig
	30/160	-30 inHg to 160 psig	60	0 psig to 60 psig
	30/200	-30 inHg to 200 psig	100	0 psig to 100 psig
	30/300	-30 inHg to 300 psig	200	0 psig to 200 psig
	psig = gauge pressure psia = absolute pressure		Other ranges available on request	
			622H	Hastelloy C flush diaphragm
PRESSURE RANGES			300	0 psig to 300 psig
			500	0 psig to 500 psig
			1000	0 psig to 1,000 psig
			1500	0 psig to 1,500 psig
			2000	0 psig to 2,000 psig
			3000	0 psig to 3,000 psig
			5000	0 psig to 5,000 psig
			Note: 622 Series is available for pressure ranges up to 0 psig to 8,000 psig	
ACCURACY	1	±0.25% full scale (BFSL)		
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire	3	1 Vdc to 5 Vdc, 3-wire, low power
	2	0 Vdc to 5 Vdc, 3-wire	5	0 Vdc to 10 Vdc, 3-wire
PROCESS CONNECTIONS	2	1/4" NPT male	11	G 1/2 B *
	8	1/2" NPT male	13	G 1 B (622 Series only, <30 psig)
ELECTRICAL CONNECTIONS	6	1/2" NPT male conduit with 6' integral cable	37	1/2" NPT male conduit with 6' flying leads with epoxy seal
OPTIONS	ST8	Threaded Orifice (621 Series only)	20	20' Cable/lead (attached to electrical connection 6 or 37)
			30	30' Cable/lead (attached to electrical connection 6 or 37)

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* 622 Series only, G 1/2 B Flush (≥ 30 psig).


EXAMPLE

Series 621 Series
 Pressure range 0 psig to 500 psig
 Accuracy ±0.25% full scale (BFSL)
 Output signal 4 mA to 20 mA, 2-wire
 Process connection 1/2" NPT Male
 Electrical connection 1/2" NPT Male conduit with 6' integral cable
 Option Threaded Orifice


621 - 500 - 1 - 1 - 8 - 6 - ST8

Front flush process connections



For ranges 0 psi to 30 psi through 0 psi to 8,000 psi



For ranges 0 to 30 psi and below

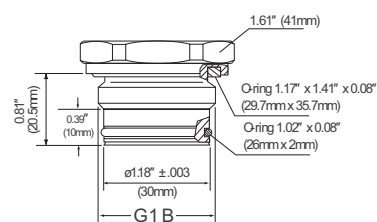

Flush corresponding port weld-on adapters



2-WIRE WIRING

+ Supply	Red
+ Output	Black
Ground	Gray

3-WIRE WIRING

+ Supply	Red
Common	Black
+ Output	Brown
Ground	Gray

Non-Incendive Pressure Transmitters



623/624 SERIES

- Vacuum and compound ranges through 0 psig to 15,000 psig; absolute ranges from 0 psia to 15 psia through 0 psia to 100 psia
- Current and voltage outputs available
- 316 Stainless Steel and Elgiloy wetted parts
- Factory Mutual and Canadian Standards Association approved
- CE compliant to suppress RFI, EMI and ESD
- NACE MR0175/ISO 15156 compliant
- NSI/ISA-12.27.01 approved single seal

APPLICATIONS

- Chemical processing
- Gas pressure measurement
- Oil field & offshore
- Mining
- Well head measurement

NOSHOK 623 and 624 Series transmitters are Factory Mutual and Canadian Standards Association approved for use in hazardous location applications as follows:

Non-Incendive for: Class I, Division 2, Groups A, B, C and D.I.P; Class II, Division 1, Groups E, F and G Maximum ratings 30 Vdc, 20 mA.

CE compliant with pressure equipment directive 2014/68/EU. ANSI/ISA-12.27.01, Approved single seal.

SPECIFICATIONS

Output signals	4 mA to 20 mA, 2-wire; 1 Vdc to 5 Vdc low power, 3-wire; 0.5 Vdc to 4.5 Vdc low power, 3-wire
Pressure ranges	Vacuum through 0 psig to 15,000 psig Absolute through 0 psia to 100 psia
Accuracy	±0.25% full scale (BFSL) (Includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	≤ ±0.2% full scale for 1 year, non-accumulating
Response time	≤1 ms (between 10% and 90% full scale)
Service life	>100,000,000 load cycles
Temperature ranges	Compensated 32 °F to 176 °F (0 °C to 80 °C) Zero effect is ±0.011% full scale/ °F within compensated range Span effect is ±0.011% full scale/ °F within compensated range Media -40 °F to 212 °F (-40 to 100 °C) Ambient -22 °F to 176 °F (-30 °C to 80 °C) Storage -22 °F to 212 °F (-30 °C to 100 °C)
Power requirement*	10 Vdc to 30 Vdc (4 mA to 20 mA, 2-wire) 6 Vdc to 30 Vdc (1 Vdc to 5 Vdc, 3-wire, 0.5 Vdc to 4.5 Vdc, 3-wire) 14 Vdc to 30 Vdc (0 Vdc to 10 Vdc, 3-wire)
Load limitations	≤ (VPower -10)/0.020 Amp for 4 mA to 20 mA; ≥ 10,000 Ω for 1 Vdc to 5 Vdc, 3-wire
Proof pressure	3 times full scale for ranges 0 psi to 15 psi through 0 psi to 200 psi 1.75 times full scale for ranges 0 psi to 300 psi through 0 psi to 10,000 psi 1.5 times full scale for 0 psi to 15,000 psi range
Burst pressure	3.8 times full scale for ranges 0 psi to 15 psi through 0 psi to 200 psi 4 times full scale for ranges 0 psi to 300 psi through 0 psi to 10,000 psi 3 times full scale for 0 psi to 15,000 psi
Measuring element	623 Series is 316 Stainless Steel for ranges up through 0 psi to 300 psi, 316 Stainless Steel and Elgiloy for ranges 0 psig to 500 psig and higher; 624 Series is 316 Stainless Steel with NBR o-ring; FKM o-ring optional
Connection	316 Stainless Steel
Housing material	316 Stainless Steel
Environmental rating	IP65 to IP67 dependent upon electrical connection
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity, over-voltage and short circuit protected
Shock	1000 g's according to IEC 60068-2-27
Vibration	20 g's according to IEC 60068-2-6
Weight	Approximately 12 oz.

* Unregulated



ORDERING INFORMATION								
SERIES	623	Stainless Steel threaded connection		624	316 Stainless Steel flush diaphragm *			
PRESSURE RANGES	30vac	-30 inHg to 0 psig	30	0 psig to 30 psig	500	0 psig to 500 psig	6000	0 psig to 6,000 psig
	30/30	-30 inHg to 30 psig	60	0 psig to 60 psig	1000	0 psig to 1,000 psig	8000	0 psig to 8,000 psig
	30/60	-30 inHg to 60 psig	100	0 psig to 100 psig	1500	0 psig to 1,500 psig	10000	0 psig to 10,000 psig
	30/100	-30 inHg to 100 psig	200	0 psig to 200 psig	2000	0 psig to 2,000 psig	15000	0 psig to 15,000 psig
	15	0 psig to 15 psig	300	0 psig to 300 psig	3000	0 psig to 3,000 psig	15A	0 psia to 15 psia
					5000	0 psig to 5,000 psig	100A	0 psia to 100 psia
	psig = gauge pressure	psia = absolute pressure	Other ranges available on request		Note: 624 Series is available for pressure ranges up to 0 psig to 8,000 psig			
ACCURACY	1	±0.25% full scale (BFSL)						
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire	3	1 Vdc to 5 Vdc, 3-wire, low power	31	0.5 Vdc to 4.5 Vdc, 3-wire, low power		
PROCESS CONNECTIONS	2	1/4" NPT male	11	G 1/2 B **				
	8	1/2" NPT male	13	G 1 B (624 Series only, <30 psig)				
ELECTRICAL CONNECTION	6	1/2" NPT male conduit with 6' integral cable						
OPTION	ST8	Threaded Orifice (623 Series only)						


Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Hastelloy flush diaphragm available upon request.

** 624 Series only, G 1/2 B Flush (≥ 30 psig).


EXAMPLE

Series 623 Series
 Pressure range 0 psig to 500 psig
 Accuracy ±0.25% full scale (BFSL)
 Output signal 4 mA to 20 mA, 2-wire
 Process connection 1/2" NPT Male
 Electrical connection 1/2" NPT Male conduit with 6' integral cable
 Option Threaded Orifice

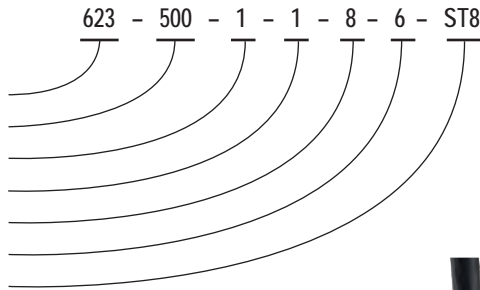


Front flush process connections




For ranges 0 psi to 30 psi
through 0 psi to 8,000 psi



For ranges 0 to 30 psi and below

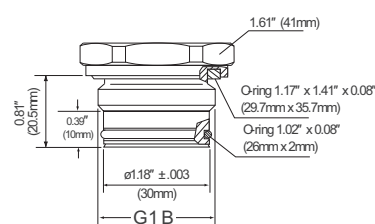

Flush corresponding port weld-on adapters

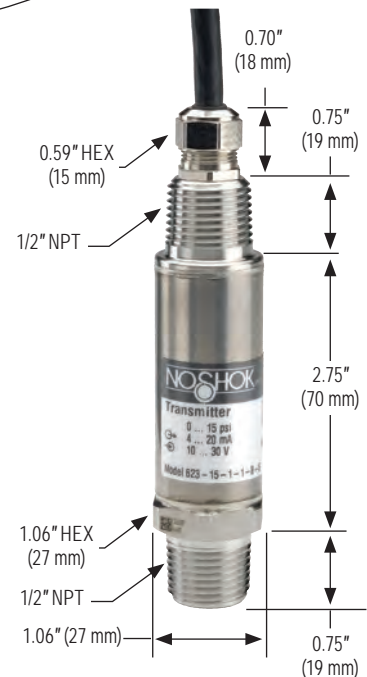

2-WIRE WIRING

+ Supply	Brown
+ Output	Green

3-WIRE WIRING

+ Supply	Brown
Common	Green
+ Output	White



625/626 SERIES

- Low pressure ranges for vapor recovery applications, vacuum and compound ranges through 0 psig to 15,000 psig; absolute ranges from 0 psia to 15 psia through 0 psia to 300 psia
- Current output
- 316 and 14-4PH Stainless Steel wetted parts
- Factory Mutual and Canadian Standards Association approved
- CE compliant to suppress RFI, EMI and ESD
- NSI/ISA-12.27.01 approved single seal

APPLICATIONS

- Chemical processing
- Gas pressure measurement
- Oil field & offshore
- Mining
- Vapor recovery systems
- Well head measurement

NOSHOK 625 and 626 Series transmitters are Factory Mutual and Canadian Standards Association approved for use in hazardous location applications as follows:

Intrinsically Safe, entity approval for Class I, II and III, Division 1, Groups A, B, C, D, E, F and G; and Class I, Zone 0 Aex ia IIC Dust Ignition-proof for Class II and III, Division 2, Groups F and G Non-incendive for Class I, Division 2, Groups A, B, C and D. CE compliant with pressure equipment directive 2014/68/EU. ANSI/ISA-12.27.01, Approved single seal.

SPECIFICATIONS

Output signal	4 mA to 20 mA, 2-wire
Pressure ranges	Vacuum through 0 psig to 15,000 psig Absolute from 0 psia to 15 psia through 0 psia to 300 psia
Accuracy	±0.25% full scale (BFSL); optional ±0.125% full scale (BFSL) (Includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	≤ ±0.2% full scale for 1 year, non-accumulating
Adjustment	± 10% full scale for zero and span
Response time	≤ 1 ms (between 10% and 90% full scale)
Service life	> 100,000,000 load cycles
Temperature ranges	Compensated 32 °F to 176 °F (0 °C to 80 °C) Zero effect is ±0.011% full scale/ °F Span effect is ±0.011% full scale/ °F Media -4 °F to 185 °F (-20 °C to 85 °C) Ambient -4 °F to 176 °F (-20 °C to 80 °C) Storage -22 °F to 221 °F (-30 °C to 105 °C)
Power requirement*	10 Vdc to 30 Vdc (4 mA to 20 mA, 2-wire)
Load limitations	≤ (VPower-10)/0.020 Amp
Proof pressure	3.5 times full scale for ranges 0 psi to 5 psi through 0 psi to 200 psi 2 times full scale for ranges 0 psi to 300 psi through 0 psi to 10,000 psi 1.5 times full scale for 0 psi to 15,000 psi
Burst pressure	4 times full scale for ranges 0 psi to 5 psi through 0 psi to 200 psi 4 times full scale for ranges 0 psi to 300 psi through 0 psi to 10,000 psi 3 times full scale for 0 psi to 15,000 psi
Measuring element	625 Series is 316 Stainless Steel for ranges up through 0 psi to 300 psi, 316 Stainless Steel with 17-4PH Stainless Steel for ≥300 psi; 626 Series is 316 Stainless Steel with NBR o-ring
Connection	316 Stainless Steel
Housing material	316 Stainless Steel
Environmental rating	IP65 to IP67 depending upon electrical connection
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity, over-voltage and short circuit protected
Shock	1,000 g's according to IEC 60068-2-27
Vibration	20 g's according to IEC 60068-2-6
Weight	Approximately 7 oz.

* Unregulated



ORDERING INFORMATION


SERIES	625	Stainless Steel threaded connection			626	316 Stainless Steel flush diaphragm			626H	Hastelloy flush diaphragm
PRESSURE RANGES	4/12 oz/in ²	-4 oz/in ² to 12 oz/in ²	30/100	-30 inHg to 100 psig	150	0 psig to 150 psig	5000	0 psig to 5,000 psig	100A	0 psia to 100 psia
	12 oz/in ²	0 oz/in ² to 12 oz/in ²	30/150	-30 inHg to 150 psig	200	0 psig to 200 psig	6000	0 psig to 6,000 psig	150A	0 psia to 150 psia
	16 oz/in ²	0 oz/in ² to 16 oz/in ²	30/200	-30 inHg to 200 psig	300	0 psig to 300 psig	7500	0 psig to 7,500 psig	200A	0 psia to 200 psia
	50 inH ₂ O	0 inH ₂ O to 50 inH ₂ O	3	0 psig to 3 psig	500	0 psig to 500 psig	8000	0 psig to 8,000 psig	250A	0 psia to 250 psia
	100 inH ₂ O	0 inH ₂ O to 100 inH ₂ O	5	0 psig to 5 psig	750	0 psig to 750 psig	10000	0 psig to 10,000 psig		
	30vac	-30 inHg to 0 psig	15	0 psig to 15 psig	1000	0 psig to 1,000 psig	15000	0 psig to 15,000 psig		
	30/15	-30 inHg to 15 psig	30	0 psig to 30 psig	1500	0 psig to 1,500 psig	15A	0 psia to 15 psia		
	30/30	-30 inHg to 30 psig	60	0 psig to 60 psig	2000	0 psig to 2,000 psig	30A	0 psia to 30 psia		
	30/60	-30 inHg to 60 psig	100	0 psig to 100 psig	3000	0 psig to 3,000 psig	60A	0 psia to 60 psia		
	psig = gauge pressure	psia = absolute pressure	Other ranges available on request		Note: 626 Series is available for pressure ranges up to 0 psig to 8,000 psig					
ACCURACY	1	±0.25% full scale (BFSL)			2	±0.125% full scale (BFSL)				
OUTPUT SIGNAL	1	4 mA to 20 mA, 2-wire								
PROCESS CONNECTIONS	2	1/4" NPT male			13	G 1 B (626 Series only, <30 psig)				
	8	1/2" NPT male			45	7/16-20 SAE J514 FIG 34B (Non-Adjustable)				
	11	G 1/2 B *								
ELECTRICAL CONNECTIONS	1	36" cable (connected to option 8)			14	Hirschmann connector 1/2 " NPT conduit - IP65				
	3	6-pin Bendix - IP65			25	M12x1 (4-pin) IP67				
	8	Hirschmann (DIN EN 175301-803 Form A)			36	Integral cable 36" - IP67				
OPTION	ST8	Threaded Orifice (625 Series only)								

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* 626 Series only, G 1/2 B Flush (≥ 30 psig).

EXAMPLE

Series	625 Series
Pressure range	0 psig to 500 psig
Accuracy	±0.25% full scale (BFSL)
Output signal	4 mA to 20 mA, 2-wire
Process connection	1/2" NPT Male
Electrical connection	Hirschmann (DIN EN 175301-803 Form A)
Option	Threaded Orifice

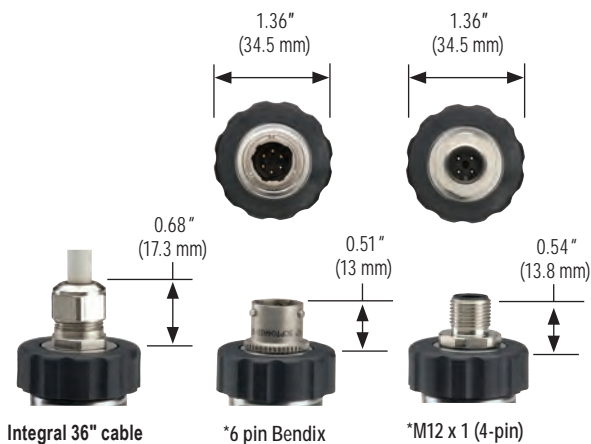

*Note: mate supplied separately

	Hirschmann	Cable	M12	Bendix
+ Supply	1	Red/Brown	1	A
+ Output	2	Black/Green	3	B

Series

00 psig

(BFSL)

2-wire

T Male

(orm A)

Orifice

625 - 500 - 1 - 1 - 8 - 8 - ST8

1.65" (42 mm)

1.06" sq. (27 mm)

1.85" (47 mm)

NOSHOK Transmitter

0 ... 100 psi

4 ... 20 mA

DC 10 ... 30 V

Model 625-100

1.06" HEX (27 mm)

1/2" NPT

Hirschmann with 1/2" NPT Female ISO 4400 conduit

NOTE

See 621/622 Series
for G1/2B and G1B
Front Flush Process
Connection Dimensions
pg. 85



Intrinsically Safe Submersible



627 SERIES

- Ranges from 0 inH₂O to 50 inH₂O through 0 psig to 350 psig
- Current output
- 316 Stainless and 17-4PH Steel wetted parts
- Canadian Standards Association approved
- CE compliant to suppress RFI, EMI and ESD

APPLICATIONS

- Irrigation
- Tank monitoring
- Water & wastewater
- Well head measurement

NOSHOK 627 Series transmitters are Canadian Standards Association approved for use in hazardous location applications as follows:
 Intrinsically Safe, entity approval for Class I, II and III, Division 1, Groups A, B, C, D, E, F and G; and Class I, Zone 0 Aex ia IIC
 Dust ignition-proof for Class II and III, Division 1, Groups E, F and G
 Non-incendive for Class I, Division 2, Groups A, B, C and D
 FMRC 3600, 3610, 3611, 3810 (including supplement #1),
 ISA-S12.0. 01, IEC 60529 (including amendment #1).
 CE compliant with pressure equipment directive 2014/68/EU.

SPECIFICATIONS

Output signal	4 mA to 20 mA, 2-wire
Pressure ranges	0 inH ₂ O to 50 inH ₂ O through 0 psig to 350 psig
Accuracy	±0.25 % full scale (BFSL); optional ±0.125% full scale (BFSL), for ranges ≥ 150 inH ₂ O (Includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	≤ ±0.2% full scale for 1 year, non-accumulating
Response time	≤1 ms (between 10% and 90% full scale)
Service life	>100,000,000 load cycles
Temperature ranges	Compensated 32 °F to 122 °F (0 °C to 50 °C) Zero effect is ±0.011% full scale/ °F within compensated range Span effect is ±0.011% full scale/ °F within compensated range Media 15 °F to 175 °F (-10 °C to 60 °C) Ambient 15 °F to 122 °F (-10 °C to 50 °C) Storage -30 °F to 175 °F (-34 °C to 60 °C)
Power requirement*	10 Vdc to 30 Vdc (4 mA to 20 mA, 2-wire)
Load limitations	≤ (VPower-10)/0.020 Amp-(0.043 Ω x length of cable in feet)
Proof pressure	2 times range
Burst pressure	3 times range
Measuring element	Diaphragm and cap: 316 Stainless Steel 17-4PH Stainless Steel for 0 psig to 350 psig Cable: Polyurethane, optional FEP
Connection	316 Stainless Steel
Housing material	316 Stainless Steel
Environmental rating	IP68
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity, over-voltage and short circuit protected
Weight	Approximately 7 oz. with standard nosecone - cable extra

* Unregulated



WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

ORDERING INFORMATION				
SERIES	627			
PRESSURE RANGES	50inH ₂ O	0 inH ₂ O to 50 inH ₂ O	5	0 psig to 5 psig (11.5 ftH ₂ O)
	100inH ₂ O	0 inH ₂ O to 100 inH ₂ O	10	0 psig to 10 psig (23.1 ftH ₂ O)
	150inH ₂ O	0 inH ₂ O to 150 inH ₂ O	15	0 psig to 15 psig (34.6 ftH ₂ O)
	250inH ₂ O	0 inH ₂ O to 250 inH ₂ O	25	0 psig to 25 psig (57.7 ftH ₂ O)
	400inH ₂ O	0 inH ₂ O to 400 inH ₂ O	30	0 psig to 30 psig (69.2 ftH ₂ O)
			60	0 psig to 60 psig (138.4 ftH ₂ O)
	psig = gauge pressure inH ₂ O = inches of water ftH ₂ O = feet of water		Other ranges available on request.	
ACCURACIES	1	±0.25% full scale (BFSL)	2	±0.125% full scale (BFSL) on ≥ 150 inH ₂ O
OUTPUT SIGNAL	1	4 mA to 20 mA, 2-wire		
PROCESS CONNECTIONS	N	Stainless Steel nosecone		
	T	G 1/2 B x 1/2" NPT male with 1/4" NPT female		
ELECTRICAL CONNECTIONS	XX	Standard Polyurethane cable		
	38-XX	Optional FEP cable		
		NOTE: XX = length of cable in feet		
OPTIONS	CBC	Cable Clamp	FE	Filter Element
	DC	Desiccant Cartridge	JB	Cable Junction Box


Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

EXAMPLE


Series 627 Series
 Pressure range 0 psig to 350 psig
 Accuracy ±0.25% full scale (BFSL)
 Output signal 4 mA to 20 mA, 2-wire
 Process connection Stainless Steel nosecone
 Electrical connection 300' of submersible Polyurethane cable

627 - 350 - 1 - 1 - N - 300

Weighted Nosecone

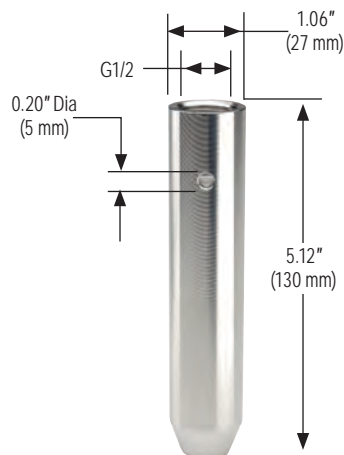

NPT Adapter

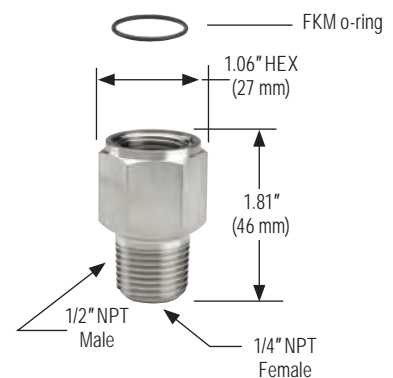

2-WIRE WIRING

+ Supply	Brown
+ Output	Green

Intrinsically Safe Hammer Union



628 SERIES

- Ranges from 0 psig to 5,000 psig through 0 psig to 20,000 psig
- Current output
- Inconel X-750 wetted parts
- Canadian Standards Association approved
- Every sensor comes with a Certificate of Calibration
- Certifications pending:
 - Factory Mutual
 - ATEX
 - CE



Shown with
optional Electrical
Connector Cage

APPLICATIONS

- Acidizing
- Choke & kill manifold
- Fracturing & cementing
- Mud logging & mud pumps
- Oil field & offshore
- Well head measurement

NOSHOK 628 Series transmitters are Canadian Standards Association approved for use in hazardous location applications as follows:

Intrinsically Safe Class I, DIV 1, Groups A,B,C,D,
-40°C, Tamb<+85°C T4, Class II, DIV 1, Groups E,F,G, Class III,
Class I, Zone 0 AEx/Ex ic IIC T4.

Non-Incendive Class I, DIV 2, Groups A,B,C,D,
-40°C, Tamb<+85°C T4, Class II, DIV 2, Groups F,G, Class III,
Class I, Zone 2 AEx/Ex ic IIC T4.

SPECIFICATIONS

Output signal	4 mA to 20 mA, 2-wire
Pressure ranges	0 psig to 5,000 psig through 0 psig to 20,000 psig
Accuracy	±0.25% full scale (BFSL) (Includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	≤ ±0.2% full scale for 1 year, non-accumulating
Response time	< 2 m/s
Service life	> 10,000,000 load cycles
Temperature ranges	Compensated 40 °F to 140 °F (5 °C to 60 °C) Zero effect is ±0.01% full scale/ °F Span effect is ±0.01% full scale/ °F Media -40 °F to 185 °F (-40 °C to 85 °C) Ambient -40 °F to 185 °F (-40 °C to 85 °C) Storage -40 °F to 185 °F (-40 °C to 85 °C)
Power requirement*	10 Vdc to 28 Vdc
Load limitations	≤ (VPower-10)/0.020 Amp
Proof pressure	1.5 times full scale (22,500 psi maximum)
Burst pressure	3 times full scale (22,500 psi maximum)
Measuring element	Inconel X-750
Connection	Inconel X-750
Housing material	316 Stainless Steel
Environmental rating	IP67 depending upon electrical connection
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity, over-voltage and short circuit protected
Shock	100 g's according to IEC 60068-2-27
Vibration	15 g's according to IEC 60068-2-6
Weight	Approximately 6 lb.

* Unregulated




ORDERING INFORMATION										
SERIES	628									
PRESSURE RANGES	5000	0 psig to 5,000 psig	6000	0 psig to 6,000 psig	10000	0 psig to 10,000 psig	15000	0 psig to 15,000 psig	20000	0 psig to 20,000 psig
ACCURACY	1	±0.25% full scale (BFSL)								
OUTPUT SIGNAL	1	4 mA to 20 mA, 2-wire								
WIRING CODE	A	E			H *					
(See Wiring Code Schematics below)	C	F			J					
	D	G								
PROCESS CONNECTIONS	14	2" Wing union (#1502)								
ELECTRICAL CONNECTIONS	3	6-pin Bendix (MIL-C-26482)				44	4-pin (MIL-C-5015)			
	36	Integral cable with gland								
OPTION	CH	Carrying Handle				EC	Electrical Connector Cage			

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* H is the standard wiring code.

EXAMPLE

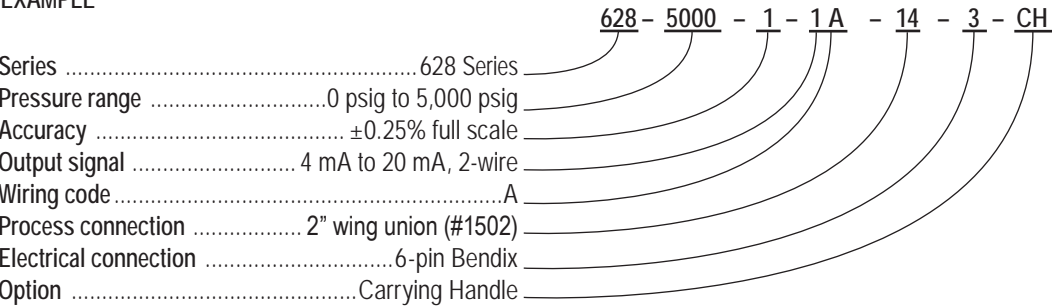

WIRING CODE SCHEMATICS

A	Pin A	+ Supply	E	Pin A	+ Supply	G	Pin B	+ Supply	J	Pin A	+ Supply
	Pin B	- Output		Pin B	- Output		Pin C	- Output		Pin B	- Output
	Pin E	Ground		Pin E	+ Shunt Cal		Pin D	Ground		Pin C	+ Shunt Cal
C	Red	+ Supply		Pin F	- Shunt Cal	Pin A	+ Supply	Pin D		- Shunt Cal	
	Black	- Output	Pin A	+ Supply	Pin B	- Output	Pin E	SHIELD, NOT CONNECTED**			
D	Red	+ Supply	F	Pin B	- Output	H*	Pin D	Ground		Pin F	SHIELD, NOT CONNECTED**
	Black	- Output		Pin C	+ Shunt Cal		Pin E	+ Shunt Cal			
	White	- Shunt Cal		Pin D	- Shunt Cal		Pin F	- Shunt Cal			
	Green	Ground		Pin E	Ground						

* H is the standard wiring code.
** No internal connection to E or F.





11 SERIES

- Ranges from vacuum through 0 psig to 400 psig
- Current and voltage outputs available
- 316 Stainless Steel wetted parts
- Can be cleaned-in-place (CIP) or steamed-in-place (SIP)
- Meets 3A requirements for the food and beverage, dairy, pharmaceutical and biotechnology industries
- CE compliant to suppress RFI, EMI and ESD

APPLICATIONS

- Food & beverage processing
- Pasteurization systems
- Pharmaceutical
- Medical

SPECIFICATIONS

Output signals	4 mA to 20 mA 2-wire, 0 Vdc to 5 Vdc 3-wire, 1 Vdc to 5 Vdc 3-wire, 1 Vdc to 6 Vdc 3-wire, 0 Vdc to 10 Vdc, 3-wire, 1 Vdc to 11 Vdc 3-wire
Pressure ranges	Vacuum through 0 psig to 400 psig
Accuracy	±0.25% full scale (BFS); Optional ±0.125% full scale (BFS); (Includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	±0.2% full scale for 1 year, non-accumulating
Adjustment	±10% full scale for zero and span
Response time	< 10 ms
Service life	> 100,000,000 load cycles
Temperature ranges	Compensated 32 °F to 175 °F (0 °C to 80 °C) Effect ±0.01%/°F for zero and span Media -40 °F to 300 °F (-40 °C to 150 °C) Ambient -40 °F to 176 °F (-40 °C to 80 °C) Storage -40 °F to 212 °F (-40 °C to 100 °C)
Power requirement*	10 Vdc to 30 Vdc (4 mA to 20 mA, 2-wire, 0 Vdc to 5 Vdc, 3-wire, 1 Vdc to 5 Vdc, 3-wire, 1 Vdc to 6 Vdc, 3-wire) 14 Vdc to 30 Vdc (0 Vdc to 10 Vdc, 3-wire, 1 Vdc to 11 Vdc, 3-wire)
Load limitations	≤ (VPower -10)/0.020 Amp for 4 mA to 20 mA output ≤ 5,000 Ω for 1 Vdc to 5 Vdc output ≤ 10,000 Ω for 0 Vdc to 10 Vdc output ≤ 4,500 Ω for 0.5 Vdc to 4.5 Vdc output
Proof pressure	3 times full scale for 0 psig to 2 psig through 0 psig to 200 psig 1.75 times full scale for 0 psig to 300 psig through 0 psig to 400 psig
Burst pressure	3.8 times full scale for 0 psig to 2 psig through 0 psig to 200 psig 4 times full scale for 0 psig to 300 psig through 0 psig to 400 psig
Measuring element	316 Stainless Steel
Connection	316 Stainless Steel
Housing material	316 Stainless Steel
Environmental rating	IP65
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity, overvoltage and short circuit protection
Shock	1,000 g's according to IEC 60068-2-27
Vibration	15 g's according to IEC 60068-2-6
Weight	Approximately 1.1 lb.

* Unregulated

Diaphragm seal must be installed facing downward or in a vertical position for drainability.
Do not install diaphragm seal facing in an upward position.





ORDERING INFORMATION									
SERIES	110								
CLAMP SIZES	12	1-1/2"	16	2"					
SEAL FILL FLUID	4	FFL77 White oil Other food grade quality fill fluids available — please consult factory							
TRANSDUCER	615	615 Series transducer							
ACCURACIES	1	±0.25% full scale (BFSL)	2	±0.125% full scale					
PRESSURE RANGES	01	-30 inHg to 0 psig	16	-30 inHg to 150 psig	37	0 psig to 10 psig	55	0 psig to 160 psig	
	04	-30 inHg to 15 psig		19	-30 inHg to 200 psig	40	0 psig to 15 psig	58	0 psig to 200 psig
	07	-30 inHg to 30 psig		22	-30 inHg to 300 psig	43	0 psig to 30 psig	61	0 psig to 300 psig
	10	-30 inHg to 60 psig		31	0 psig to 100 inH ₂ O	46	0 psig to 60 psig	64	0 psig to 400 psig
	13	-30 inHg to 100 psig		34	0 psig to 5 psig	49	0 psig to 100 psig		
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire		3	1 Vdc to 5 Vdc, 3-wire		5	0 Vdc to 10 Vdc, 3-wire	
	2	0 Vdc to 5 Vdc, 3-wire		4	1 Vdc to 6 Vdc, 3-wire		6	1 Vdc to 11 Vdc, 3-wire	
ELECTRICAL CONNECTIONS	1	36" Cable attached to Hirschmann		14	Hirschmann connection with ISO 4400 1/2" NPT conduit				
	3	6-pin Bendix		25	M12 X 1 (4-pin)				
	8	Hirschmann (DIN EN 175301-803 form A)		36	Integral 36" cable				

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

EXAMPLE

Series 11 Series
 Clamp size 1-1/2" ASME-BPE Sanitary Clamp
 Seal fill fluid FFL77 White oil
 Transmitter 615 Series
 Accuracy ±0.25% full scale (BFSL)
 Pressure range 0 psig to 5 psig
 Output signal 4 mA to 20 mA, 2-wire
 Electrical connection Hirschmann with 36" of cable

110 - 12 - 4 - 615 - 1 - 34 - 1 - 1

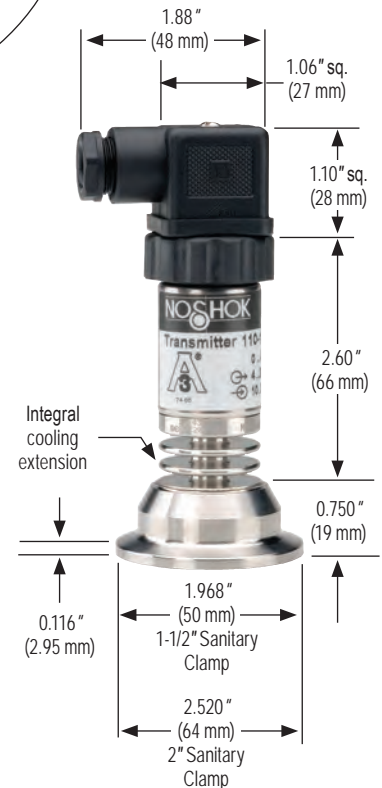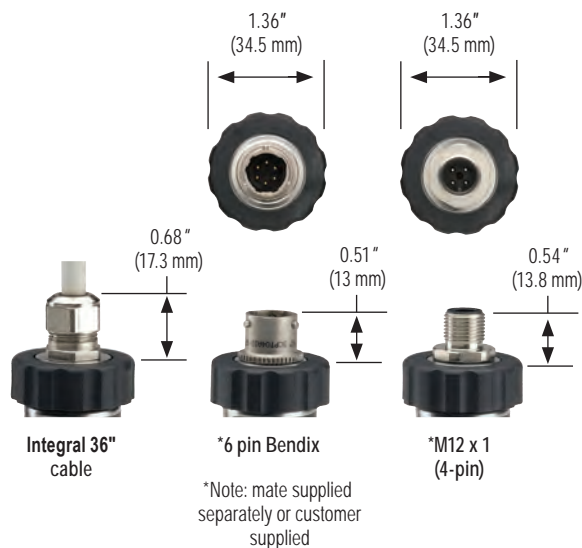

2-WIRE WIRING

	Hirschmann	Cable	M12	Bendix
+ Supply	1	Red	1	A
+ Output	2	Black	3	B

3-WIRE WIRING

	Hirschmann	Cable	M12	Bendix
+ Supply	1	Red	1	A
Common	2	Black	3	B
+ Output	3	White	4	C



20 SERIES

- Ranges from 16 inH₂O to 58 psig (1,600 inH₂O)
- Hart® protocol output available
- 316 Stainless Steel wetted parts
- Strong flush diaphragm with minimal fill volume
- Can be cleaned-in-place (CIP) or steamed-in-place (SIP)
- Meets 3A requirements



APPLICATIONS

- Food & beverage
- Dairy
- Chemical processing
- Pharmaceutical

FEATURES & BENEFITS

- All Stainless Steel housing
- Easy programming and range adjustment without test pressure via on-board display
- Accuracy 0.1% of adjusted span
- 10:1 turn down
- Active temperature compensation
- Hart® protocol optional
- 360° rotatable display

SPECIFICATIONS

Output signals	4 mA to 20 mA 2-wire, 4 mA to 20 mA 2-wire and Hart® signal
Pressure ranges	16 inH ₂ O to 58 psig (1,600 inH ₂ O)
Accuracy	0.1% of adjusted span
Stability	<0.1%/year
Adjustment	By 3 push buttons on display or optional Hart® signal
Response time	<150 ms
Service life	>10 years
Temperature ranges	-4 °F to 212 °F (-20 °C to 100 °C); 293 °F (145 °C) for 45 min.
Power requirement*	12 Vdc to 36 Vdc
Measuring element	316 Stainless Steel (Hastelloy C, Tantalum or Goldplated optional)
Connection	316 Stainless Steel
Housing material	304 Stainless Steel
Environmental rating	IP66 (IP68 optional)
Electrical protection	IP66 (NEMA 4X), IP68 (NEMA 6) optional
Weight	Approximately 3.3 lb. (Depending on process connection)

* Unregulated



ORDERING INFORMATION			
SERIES	204		
PROCESS CONNECTIONS	90	E&H Universal adapter short version	95 King Gage Standard - 6"
	91	E&H Universal adapter long version	96 King Gage Long - 8"
	92	Anderson Negele Type SL Short	97 Rosemount Tank Spud - 2"
	93	Anderson Negele Type SL Long - 6"	98 Rosemount Tank Spud - 6"
	94	King Gage Short	99 Tank Mate Medium - 6"
PRESSURE RANGES (Adjustable)*	16/160 inH ₂ O	16 inH ₂ O to 160 inH ₂ O (.06 psig to 6 psig)	6/58 psig 6 psig to 58 psig (160 inH ₂ O to 1,600 inH ₂ O)
	47/470 inH ₂ O	47 inH ₂ O to 470 inH ₂ O (1.7 psig to 17 psig)	
ACCURACIES	1	0.1% of adjusted span	
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire	43 4 mA to 20 mA, 2-wire and Hart® signal
ELECTRICAL CONNECTIONS	25	M12 x 1 (4-pin)	71 PG9 Cable Gland
	28	1/2" NPT Female	
OPTIONS	TC	Transparent Cover (for display)	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.


*Other ranges available, consult factory

EXAMPLE

	204	-	90	-	16/160 inH ₂ O	-	1	-	43	-	71	-	TC
Series	20 Series												
Process connection	E&H Universal adapter short version												
Pressure range	16 inH ₂ O to 160 inH ₂ O												
Accuracy	0.1% of span												
Output signal	4 mA to 20 mA, 2-wire and Hart® signal												
Electrical connection	PG9 Cable Gland												
Option.....	Transparent Cover												


Dimensions

204-91 (E&H Universal adapter)

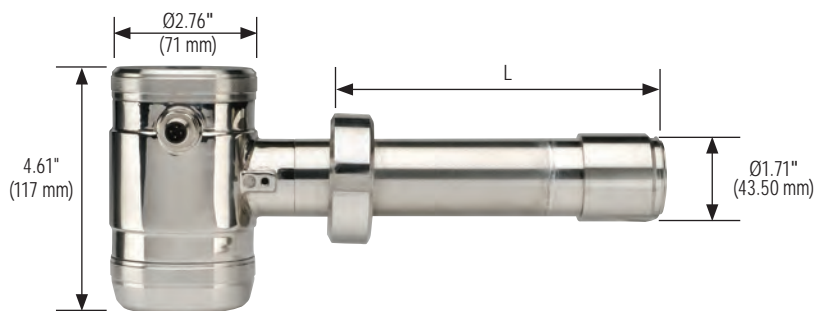


L	
Short	2.16" (54.86 mm)
Long	5.93" (150.50 mm)

204-93 (Anderson Negele Type SL)

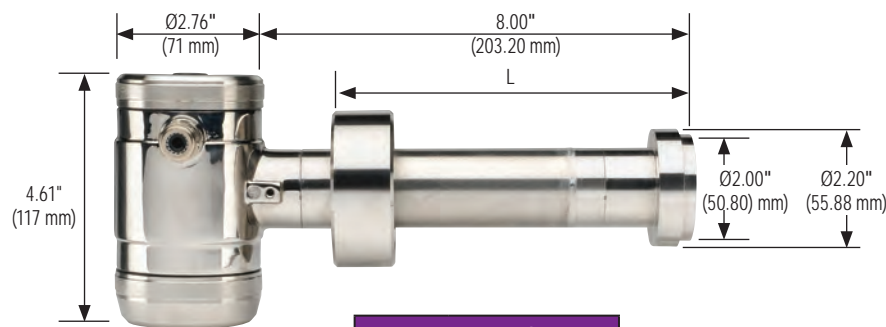


L	
Short	2.05" (52.0 mm)
Long	6.36" (161.50 mm)

204-95 (King Gage)

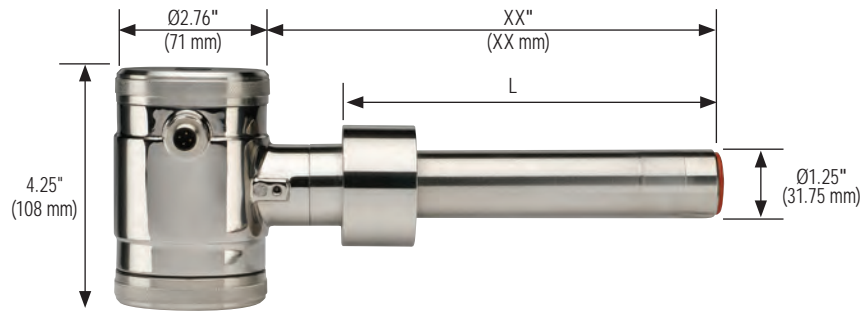


L	
Short	2.19" (55.63 mm)
Standard	6.62" (168.15 mm)
Long	8.81" (223.77 mm)

204-98 (Rosemount Tank Spud)

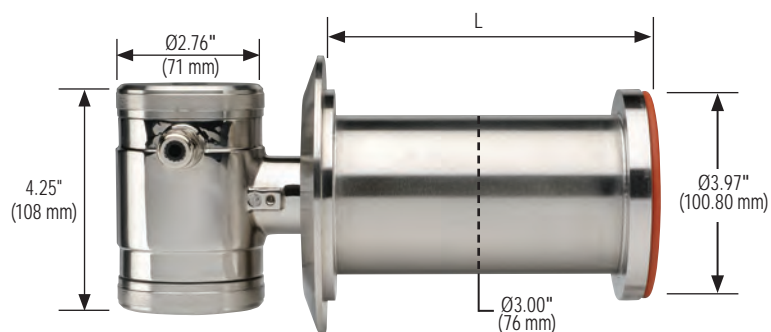

L	
Short	2.11" (53.58 mm)
Long	6.11" (155.19 mm)

204-99 (Tank Mate)

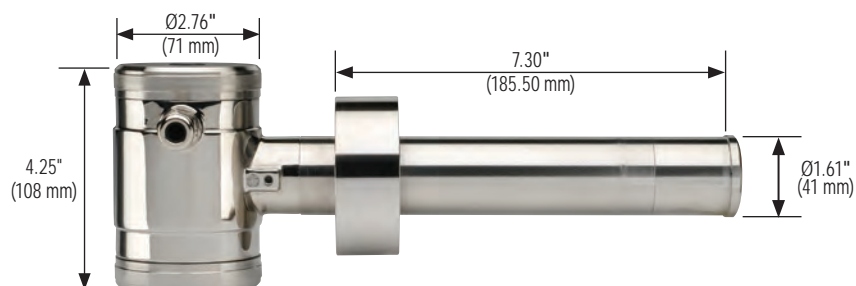



25 SERIES

- Ranges from -160 inH₂O vac to 1,160 psig
- Hart® protocol output available
- 316 Stainless Steel wetted parts
- Strong flush diaphragm with minimal fill volume
- Can be cleaned-in-place (CIP) or steamed-in-place (SIP)
- Meets 3A requirements



APPLICATIONS

- Food & dairy
- Chemical processing
- Pharmaceutical

FEATURES & BENEFITS

- All Stainless Steel housing
- Easy programming and range adjustment without test pressure via on-board display
- Accuracy 0.2% of adjusted span
- 4:1 turn down
- Active temperature compensation
- Hart® protocol optional

SPECIFICATIONS

Output signals	4 mA to 20 mA 2-wire, 4 mA to 20 mA 2-wire and Hart® signal
Pressure ranges	-160 inH ₂ O vac to 1,160 psig
Accuracy	0.2% of adjusted span
Stability	<0.1%/year
Adjustment	By 3 push buttons on display or optional Hart® signal
Response time	<100 ms
Service life	>10 years
Temperature ranges	-4 °F to 212 °F (-20 °C to 100 °C); 293 °F (145 °C) for 45 min.
Power requirement*	12 Vdc to 36 Vdc
Measuring element	316 Stainless Steel (Hastelloy C or Tantalum optional)
Connection	316 Stainless Steel
Housing material	304 Stainless Steel (316 Stainless Steel optional)
Environmental rating	IP66 (IP68 optional)
Electrical protection	IP66 (NEMA 4X), IP68 (NEMA 6) optional
Weight	Approximately 2.20 lb. (Depending on process connection)

* Unregulated



ORDERING INFORMATION			
SERIES	254		
TRI-CLAMP SIZE	12 1-1/2"	24 3"	
	16 2"		
PRESSURE RANGES (Adjustable)	40inH ₂ O-vac -40 inH ₂ O to 0 inH ₂ O*	16/40 inH ₂ O 0 inH ₂ O to 16 inH ₂ O to 0 inH ₂ O to 40 inH ₂ O (.6 psig to 1.45 psig)	
	160inH ₂ O-vac -160inH ₂ O to 0 inH ₂ O	40/160 inH ₂ O 0 inH ₂ O to 40 inH ₂ O to 0 inH ₂ O to 160 inH ₂ O (1.45 psig to 5.8 psig)	
	14.7/43-vac -14.7 psig to 43 psig	160/637 inH ₂ O 0 inH ₂ O to 160 inH ₂ O to 0 inH ₂ O to 637 inH ₂ O (5.8 psig to 23 psig)	
	14.7/130-vac -14.7 psig to 130 psig	14.5/58 14.5 psig to 58 psig (0 inH ₂ O to 400 inH ₂ O to 0 inH ₂ O to 1,607 inH ₂ O)	
	14.7/335-vac -14.7 to 335 psig	29/145 29 psig to 145 psig (0 inH ₂ O to 803 inH ₂ O to 0 inH ₂ O to 4,017 inH ₂ O)	
	14.7/1145-vac -14.7 psig to 1,145 psig	87/350 87 psig to 350 psig (0 inH ₂ O to 2,410 inH ₂ O to 0 inH ₂ O to 9,697 inH ₂ O)	
		290/1160 290 psig to 1,160 psig (0 inH ₂ O to 8,035 inH ₂ O to 0 inH ₂ O to 32,140 inH ₂ O)	
ACCURACIES	1 0.2% of adjusted span		
OUTPUT SIGNALS	1 4 mA to 20 mA, 2-wire	43 4 mA to 20 mA, 2-wire and Hart® signal	
ELECTRICAL CONNECTIONS	25 M12 x 1 (4-pin)	71 PG9 Cable Gland	
28 1/2" NPT Female			
OPTIONS	TC Transparent Cover (for display)		

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Not available in 1-1/2" Tri-Clamp

EXAMPLE

Series	254 Series	254	-	12	-	16/40 inH ₂ O	-	1	-	43	-	25	-	TC
Tri Clamp size	1-1/2"													
Pressure range	0 inH ₂ O to 16 inH ₂ O to 0 inH ₂ O to 40 inH ₂ O													
Accuracy	0.2% of span													
Output signal	4 mA to 20 mA, 2-wire and Hart® signal													
Electrical connection	M12 x 1 (4-pin)													
Option	Transparent Cover													



*1-1/2", 2" and 3" Tri-Clamp connections available

"SNORKEL" Pressure & Level Transmitter



304 Series shown
with transparent cover

APPLICATIONS

- Tank level measurement
- Food & beverage
- Dairy
- Breweries
- Chemical processing
- Pharmaceutical

FEATURES & BENEFITS

300/301 Series

- Cable connection only (no housing)
- Active temperature compensation
- Fixed range (300 Series)
- Range adjustment with Hart® (301 Series)
- 10:1 Turn down (301 Series)

302 Series

- All polished Stainless Steel housing
- Active temperature compensation
- Zero/span adjustable
- 4:1 Turn down

304 Series

- All polished Stainless Steel housing
- Active temperature compensation
- Accuracy 0.1% of adjusted span
- 10:1 Turn down
- Easy programming and range adjustment without test pressure via on-board display
- Hart® protocol available

30 SERIES

- 300 Series: ranges from 40 inH₂O to 60 psig
- 301 Series: adjustable ranges from 16 inH₂O to 1,450 psig via Hart®
- 302 Series: adjustable ranges from 40 inH₂O to 1,160 psig
- 304 Series: adjustable ranges from 16 inH₂O to 1,450 psig
- Hart® signal output available on 301 & 304 Series Transmitters
- 316 Stainless Steel wetted parts
- Strong flush diaphragm with minimal fill volume
- Can be cleaned-in-place (CIP) or steamed-in-place (SIP)
- Meets 3A requirements



	SERIES	SPECIFICATIONS
Output signals	All	4 mA to 20 mA 2-wire, 4 mA to 20 mA 2-wire and Hart® signal (301 & 304 Series only)
Pressure ranges	300 Series	Ranges from 40 inH ₂ O to 60 psig
	302 Series	Adjustable ranges from 40 inH ₂ O to 1,160 psig
	301/304 Series	Adjustable ranges from 16 inH ₂ O to 1,450 psig
Accuracy	300//302 Series	0.2% of adjusted span
	301/304 Series	0.1% of adjusted span
Stability	All	<0.1%/year
Adjustment	301 Series	Hart® signal
	302 Series	Zero and span internally
	304 Series	By 3 push buttons on display or optional Hart® signal
Response time	All	<150 ms
Service life	All	>10 years
Temperature ranges	300/301 Series	14 °F to 158 °F (-10 °C to 70 °C)
	302/304 Series	-4 °F to 212 °F (-20 °C to 100 °C) ; 293 °F (145 °C) for 45 min.
Power requirement*	All	12 Vdc to 36 Vdc
Measuring element	All	316L Stainless Steel (Hastelloy C, Tantalum or Gold plated optional)
Connection	All	316 Stainless Steel
Housing material	All	304 Stainless Steel (316 Stainless Steel optional)
Environmental rating	300/301 Series	IP68
	302/304 Series	IP66 (IP68 optional)
Electrical protection	All	IP66 (NEMA 4X), IP68 (NEMA 6) optional
Weight		Weight is dependent on model and cable length

* Unregulated



WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

ORDERING INFORMATION					
SERIES	300	Fixed range transmitter	302	Adjustable transmitter	
	301	Adjustable transmitter with Hart® signal	304	Intelligent transmitter	
TRI-CLAMP SIZE	12	1-1/2"	24	3"	
	16	2"			
300 SERIES PRESSURE RANGES (Fixed)	40 inH ₂ O	0 inH ₂ O to 40 inH ₂ O	120 inH ₂ O	0 inH ₂ O to 120 inH ₂ O	15 0 psig to 15 psig
	60 inH ₂ O	0 inH ₂ O to 60 inH ₂ O	5	0 psig to 5 psig	30 0 psig to 30 psig
	80 inH ₂ O	0 inH ₂ O to 80 inH ₂ O	10	0 psig to 10 psig	60 0 psig to 60 psig
301 SERIES PRESSURE RANGES (Adjustable with Hart®)	16/160 inH ₂ O	0 inH ₂ O to 16 inH ₂ O to 0 inH ₂ O to 160 inH ₂ O	14.5/145	0 psig to 14.5 to 0 psig to 145 psig	290/1450 0 psig to 290 psig to 0 psig to 1,450 psig
	47/470 inH ₂ O	0 inH ₂ O to 47 inH ₂ O to 0 inH ₂ O to 470 inH ₂ O	72.5/435	0 psig to 72.5 psig to 0 psig to 435 psig	
302 SERIES PRESSURE RANGES (Adjustable)	40/160 inH ₂ O	0 inH ₂ O to 40 inH ₂ O to 0 inH ₂ O to 160 inH ₂ O	14.5/58	0 psig to 14.5 to 0 to 58 psig	232/725 0 psig to 232 psig to 0 psig to 725 psig
	160/277 inH ₂ O	0 inH ₂ O to 160 inH ₂ O to 0 inH ₂ O to 277 inH ₂ O	36/145	0 psig to 36 psig to 0 psig to 145 psig	580/1160 0 psig to 580 psig to 0 psig to 1,160 psig
	277/609 inH ₂ O	0 inH ₂ O to 277 to 0 inH ₂ O to 609 inH ₂ O	100/232	0 psig to 100 psig to 0 psig to 232 psig	
304 SERIES PRESSURE RANGES (Intelligent)	16/160 inH ₂ O	0 inH ₂ O to 16 inH ₂ O to 0 inH ₂ O to 160 inH ₂ O	14.5/145	0 psig to 14.5 to 0 psig to 145 psig	290/1450 0 psig to 290 psig to 0 psig to 1,450 psig
	47/470 inH ₂ O	0 inH ₂ O to 47 inH ₂ O to 0 inH ₂ O to 470 inH ₂ O	72.5/435	0 psig to 72.5 psig to 0 psig to 435 psig	
ACCURACIES	1	0.2% of adjusted span*			
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire	43	4 mA to 20 mA, 2-wire and Hart® signal**	
ELECTRICAL CONNECTIONS †	25	M12 x 1 (4-pin)	71	PG9 Cable Gland	
	28	1/2" NPT Female			
CABLE LENGTHS † †	15P	15' Polyurethane cable	30P	30' Polyurethane cable	
OPTIONS	JB	Cable Junction Box	TC	Transparent Cover (for display)***	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Standard accuracy on the 304 Series is ±0.1% of adjusted span

** Required for the 301 Series, optional for the 304 Series

*** Available for the 304 Series only

† Available for the 302 and 304 Series only

† † Additional cable lengths available, consult factory

EXAMPLE


	301	-	12	-	14.5/145	-	1	-	43	-	15P
Series	301 Series										
Tri-Clamp size	1-1/2"										
Pressure range	0 psig to 14.5 to 0 psig to 145 psig										
Accuracy	0.2% of adjusted span										
Output signal	4 mA to 20 mA, 2-wire and Hart® signal										
Cable length	15' Polyurethane cable										

EXAMPLE

	304	-	16	-	72.5/435	-	1	-	43	-	28	-	15P	-	TC
Series	304 Series														
Tri-Clamp size	2"														
Pressure range	0 psig to 72.5 psig to 0 psig to 435 psig														
Accuracy	0.1% of adjusted span														
Output signal	4 mA to 20 mA, 2-wire and Hart®														
Electrical connection	1/2" NPT Female														
Cable length	15' Polyurethane cable														
Option	Transparent Cover														


Dimensions

300/301 Series

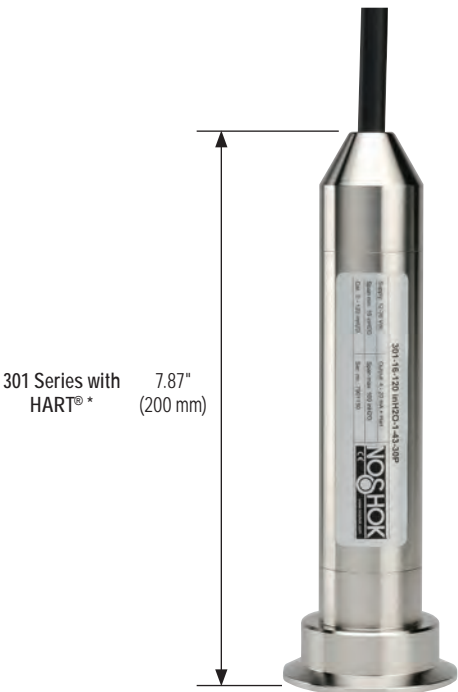

* 300 Series fixed range is 6.22" (158 mm)

302 Series

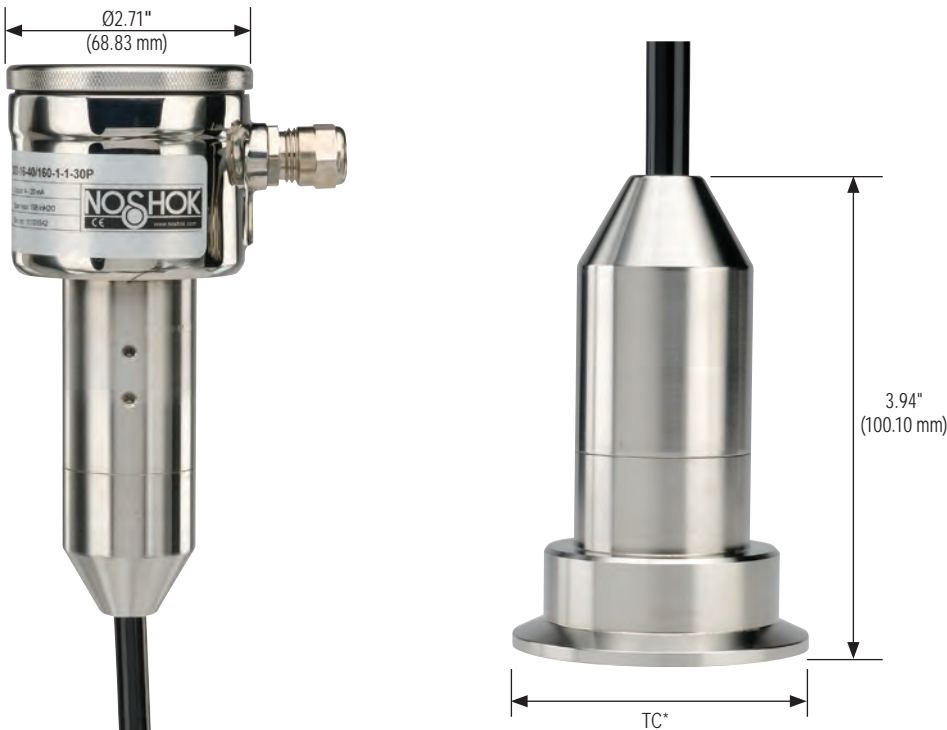

*1-1/2", 2" and 3" Tri-Clamp connections available

304 Series



*1-1/2", 2" and 3" Tri-Clamp connections available



100 SERIES

- Switch adjustment ranges from vacuum through 6,000 psi depending on model
- 100V: Standard Brass with Buna-N diaphragm wetted parts, 100L: Standard Brass with Kapton diaphragm wetted parts, 100H: Standard Zinc-nickel with Buna-N diaphragm wetted parts
- SPST creep action switch with Silver-plated contacts
- CE compliant to suppress RFI, EMI and ESD
- RoHS compliant

APPLICATIONS

- Hydraulics & pneumatics
- Pumps & compressors
- Tank monitoring
- Leak detection
- Water management

SPECIFICATIONS

Switching parameters

Function	SPST N.O. or N.C. contact
Contact rating	100 VA Max Voltage 42 Vdc
Repeatability	See Chart on page 107
Hysteresis	<10% of setpoint
Contact material	Silver-plated, optional gold-plated
Frequency	Max. 60 cycles/min

Switch type	Creep action
-------------	--------------

Pressure ranges	Vacuum through 6,000 psig
-----------------	---------------------------

Service life	>1,000,000 load cycles
--------------	------------------------

Temperature ranges	Media -13 °F to 185 °F (-25 °C to 85 °C) Ambient -13 °F to 185 °F (-25 °C to 85 °C) Storage -13 °F to 185 °F (-25 °C to 85 °C)
--------------------	--

Proof pressure	100V & 100L 350 psi 100H: 9,000 psi
----------------	--

Measuring element	100V: Brass, Buna-N diaphragm 100L: Brass, Kapton diaphragm 100H: Zinc-nickel plated Steel, Buna-N diaphragm
-------------------	--

Housing material	100V & 100L: Brass, optional Stainless Steel 100H: Plated Steel, optional Stainless Steel
------------------	--

Environmental rating	IP00 - Exposed Terminals IP69 - Flying Leads & Deutsch Integral
----------------------	--

Weight	Approximately 0.2 lb.
--------	-----------------------



ORDERING INFORMATION			
SERIES	100V	100 Vacuum Series	100H 100 High Pressure Series
	100L	100 Low Pressure Series	
SWITCH FUNCTIONS	1	SPST, Normally open	2 SPST, Normally closed
PROCESS CONNECTION	1	1/8" NPT male	31 9/16-18 SAE Male, Non-Adjustable
	2	1/4" NPT male	33 G 1/8B
	10	G 1/4B	45 7/16-20 SAE Male, Non-Adjustable
100V VACUUM PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)	3/25-vac	-3 inHg to -25 inHg (350 psig)	
100L LOW PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)	2/20	2 psig to 20 psig (350 psig)	
	15/100	15 psig to 100 psig (350 psig)	
100H HIGH PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)	2/30	2 psig to 30 psig (9,000 psig)	
	15/200	15 psig to 200 psig (9,000 psig)	
	125/600	125 psig to 600 psig (9,000 psig)	
ELECTRICAL CONNECTIONS [†]	4	Spade Terminals (1/4 x 1/32)	97 Weatherpack Tower, 2-Pin Male*
	66	Deutsch Integral 2-Pin (DT04-2P)	98 Weatherpack Shroud, 2-Pin Female*
	77	18" Flying Leads	99 Weatherpack Shroud, 2-Pin Male*
	78	6-32 Terminal Screws	100 Deutsch 2-Pin Male (DT04-2P)*
	96	Weatherpack Tower, 2-Pin Female*	103 Deutsch 2-Pin Female Socket (DT06-2S)*
OPTIONS**	AU	Gold Plated Contacts	VT FKM Diaphragm (0/250 °F)
	EP	EPDM Diaphragm (-10/250 °F)	SS 316 SS Wetted Materials
	HNBR	Low Temp Nitrile (-40/110 °F)	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Options attached to Flying Leads

** Not all options are available for all ranges, consult factory

† Other electrical connections available, consult factory



EXAMPLE

Series	100 High Pressure Series	100H
Switch function.....	SPST, normally closed	2
Process connection	1/8" NPT Male	1
Switch adjustment range.....	2 psig to 30 psig (9,000 psig)	2/30
Electrical connection	Spade Terminals (1/4 x 1/32)	4
Option.....	Gold plated contacts	AU

Series	Range	Repeatability
100V	3 - 25 inHg	1 psi or 5% of setpoint
100L	2 - 20 15 - 100 50 - 150	3% of full setpoint range
100H	2 - 30 15 - 200 125 - 600 300 - 2,500 500 - 3,500 3,000 - 6,000	3% of full setpoint range



100V & 100L Spade Terminals

100H Spade Terminals

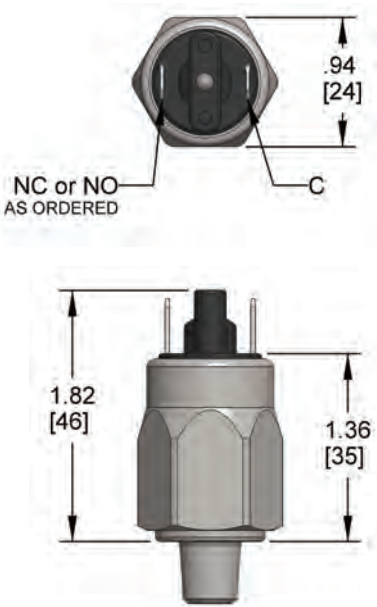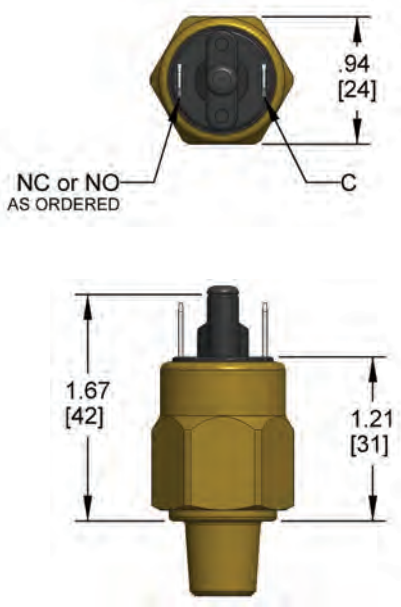


100V & 100L Deutsch 2-Pin


100H Deutsch 2-Pin

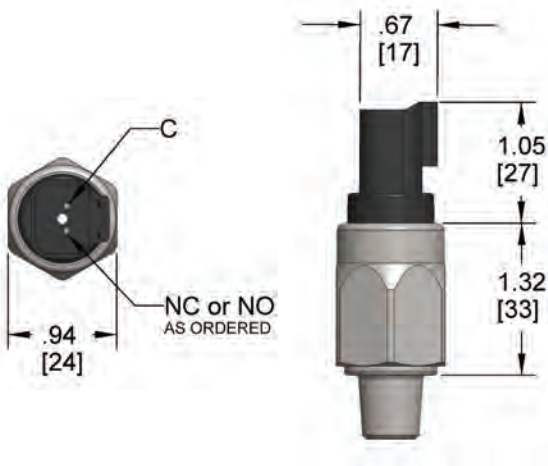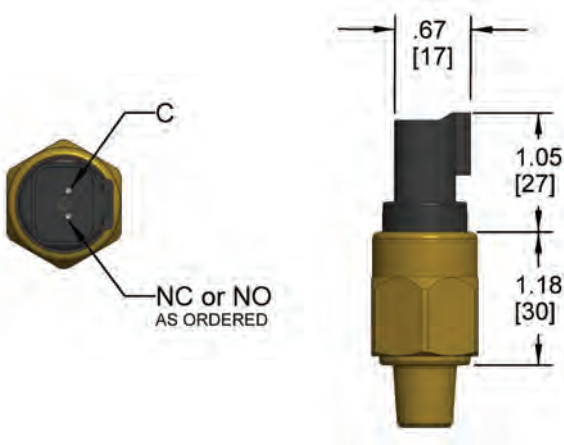

100V & 100L 18" Flying Leads

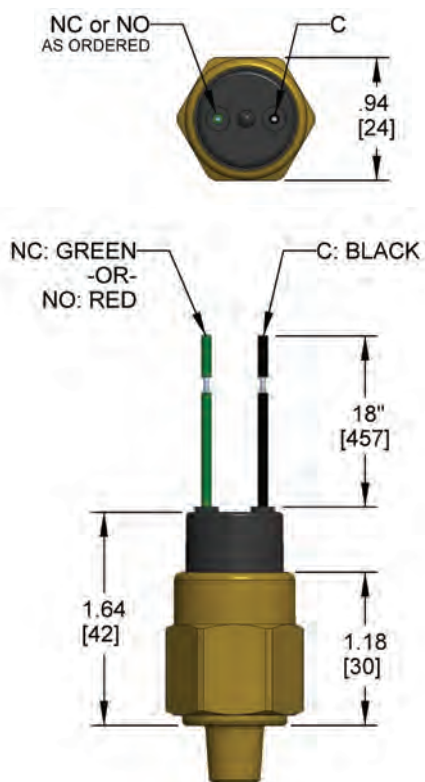

100H 18" Flying Leads

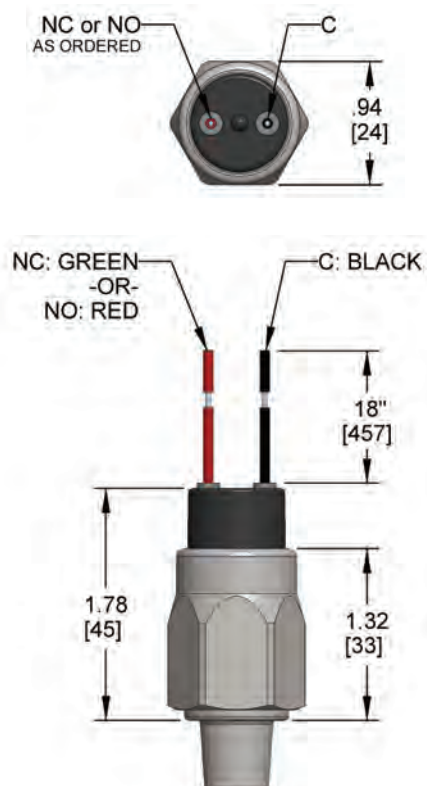



200 SERIES

- Switch adjustment ranges from vacuum through 6,000 psig depending on model
- 200V & 200L: Standard Brass with Buna-N diaphragm wetted parts, 200H: Standard Zinc-nickel with Buna-N diaphragm wetted parts
- SPST or SPDT snap-action switch with solid Silver contacts
- CE compliant to suppress RFI, EMI and ESD
- RoHS compliant

APPLICATIONS

- Hydraulics & pneumatics
- Pumps & compressors
- Tank monitoring
- Leak detection
- Water management

SPECIFICATIONS

Switching parameters	
Function	SPST or SPDT
Contact rating*	5A @ 125/250 Vac 5A @ 12/24 Vdc
Repeatability	See Chart 1 on page 111
Hysteresis	See Chart 2 on page 111
Contact material	Solid Silver, self-cleaning, optional gold-plated
Frequency	Max. 100 cycles/min
Switch type	Snap action
Pressure ranges	-5 inHg to -28 inHg (350 psig) through 1000 psig to 6,000 psig (9,000 psig)
Service life	>1,000,000 load cycles
Temperature ranges	Media -4 °F to 176 °F (-20 °C to 80 °C) Ambient -4 °F to 176 °F (-20 °C to 80 °C) Storage -4 °F to 176 °F (-20 °C to 80 °C)
Proof pressure	Static = 9000 psi (620 bar) Dynamic = 7500 psi (517 bar)
Measuring element	200V: Brass, Buna-N diaphragm 200L: Brass, Buna-N diaphragm 200H: Zinc-nickel, Buna-N diaphragm
Housing material	Zinc-nickel plated Steel
Environmental rating	IP00 - Exposed Terminals IP65 - Hirschmann IP69 - M12, Flying Leads & Deutsch Integral
Weight	Approximately 0.2 lb.

* Gold contacts may be required for less than 12 VDC and 20 milliamps



ORDERING INFORMATION			
SERIES	200V	200 Vacuum Series	200H 200 High Pressure Series
	200L	200 Low Pressure Series	
SWITCH FUNCTIONS	1	SPST, Normally open	3 SPDT
	2	SPST, Normally closed	
PROCESS CONNECTIONS	1	1/8" NPT male	31 9/16-18 SAE Male, Non-Adjustable
	2	1/4" NPT male	33 G 1/8B
	10	G 1/4B	45 7/16-20 SAE Male, Non-Adjustable
200V VACUUM PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)			
200L LOW PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)	5/25-vac	-5 inHg to -25 inHg (350 psig)	
	3/15	3 psig to 15 psig (350 psig)	15/75 15 psig to 75 psig (350 psig)
200H HIGH PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)	5/30	5 psig to 30 psig (350 psig)	50/150 50 psig to 150 psig (350 psig)
	10/85	10 psig to 85 psig (9,000 psig)	500/2500 500 psig to 2,500 psig (9,000 psig)
	65/300	65 psig to 300 psig (9,000 psig)	500/3500 500 psig to 3,500 psig (9,000 psig)
ELECTRICAL CONNECTIONS†	125/600	125 psig to 600 psig (9,000 psig)	1000/6000 1,000 psig to 6,000 psig (9,000 psig)
	4	Spade Terminals (1/4 x 1/32)	98 Weatherpack Shroud, 2-Pin Female*, **
OPTIONS***	8	Hirschmann (DIN EN 175301-803 Form A)	99 Weatherpack Shroud, 2-Pin Male*, **
	34	Packard 3-Pin	100 Deutsch 2-Pin Male (DT04-2P)*, **
	46	Deutsch Integral 3-Pin (DT04-3P)	101 Deutsch 3-Pin Male (DT04-3P)*
	66	Deutsch Integral 2-Pin (DT04-2P) **	103 Deutsch 2-Pin Female Socket (DT06-2S)*, **
	69	M12 x 1 3-Pin	104 Deutsch 3-Pin Female Socket (DT06-3S)*
	77	18" Flying Leads	110 Weatherpack Tower, 3-Pin Female*
	78	6-32 Terminal Screws	111 Weatherpack Tower, 3-Pin Male*
	96	Weatherpack Tower, 2-Pin Female*, **	112 Weatherpack Shroud, 3-Pin Female*
	97	Weatherpack Tower, 2-Pin Male*, **	113 Weatherpack Shroud, 3-Pin Male*
	AU	Gold Plated Contacts	VT FKM Diaphragm (0/250 °F)
	EP	EPDM Diaphragm (-10/250 °F)	KP KAPTON (-40/230 °F)
	HNBR	Low Temp Nitrile (-40/110 °F)	SS 316 SS Wetted Materials

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Options attached to Flying Leads

** For SPST only

*** Not all options are available for all ranges, consult factory

† Other electrical connections available, consult the factory

EXAMPLE

Series200 Low Pressure Series
 Switch function..... SPST, normally open
 Process connection 1/4" NPT Male
 Adjustable range 5 psig to 30 psig (350 psig)
 Electrical connection 316 SS Wetted materials

200L - 1 - 2 - 5/30 - SS

CHART 1



Series	Range	Repeatability
200V	5 - 25 inHg	1 psi or 5% of setpoint
200L	3 - 15	1 psi or 5% of setpoint
	5 - 30	
	15 - 75	
	50 - 150	
200H	10 - 85	2% of full setpoint range
	65 - 300	
	125 - 600	
	500 - 2,500	
	500 - 3,500	
	1,000 - 6,000	

CHART 2

Series	Range	Hysteresis
200V	5 - 25 inHg	4-6 inHg
200L	3 - 15	2-5 psi
	5 - 30	3-7 psi
	15 - 75	4-7 psi
	50 - 150	7-15 psi
200H	10 - 85	1-10 psi
	65 - 300	8-30 psi
	125 - 600	20-80 psi
	500 - 2500	70-300 psi
	500 - 3500	75-300 psi
	1000 - 6000	150-600 psi



200V & 200L Spade Terminals

200H Spade Terminals

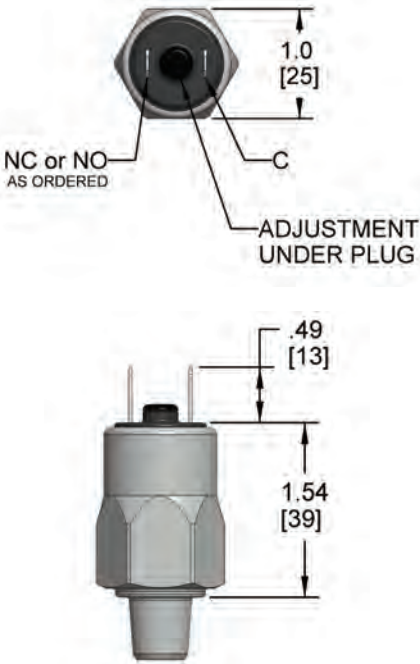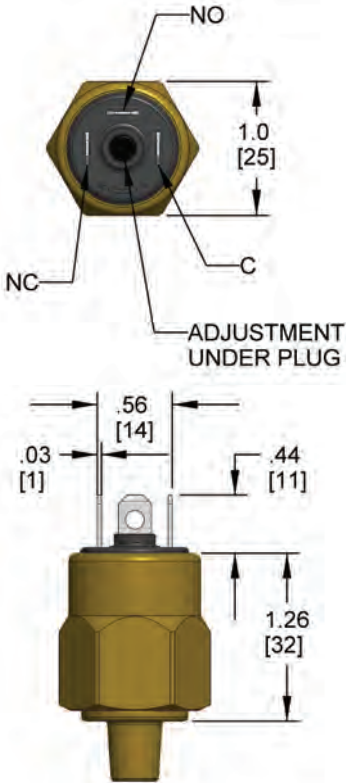



200V & 200L Hirschmann DIN EN 175301-803 Form A

200H Hirschmann DIN EN 175301-803 Form A

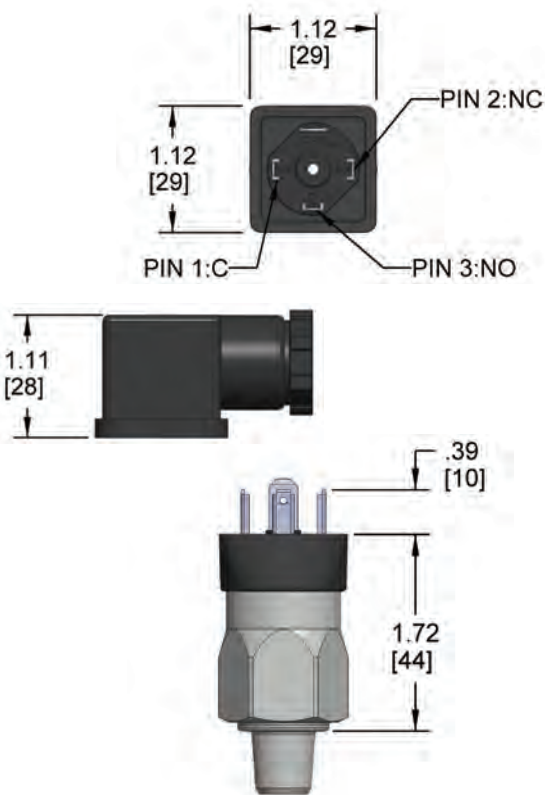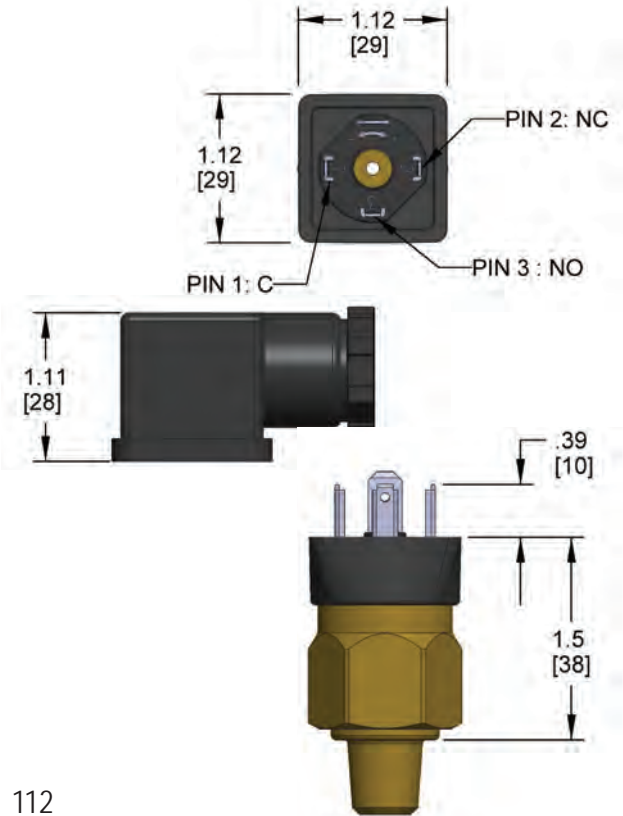



200V & 200L Packard 3-Pin

200H Packard 3-Pin

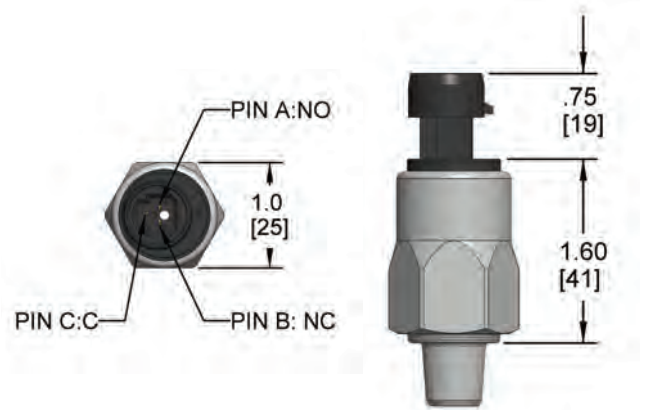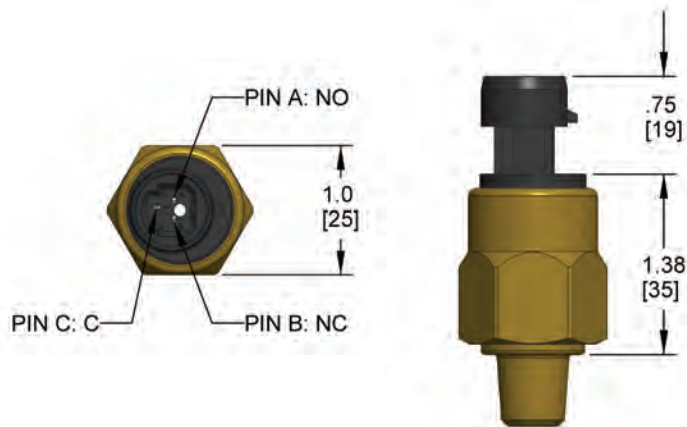





200V & 200L 2-Pin Deutsch

200H 2-Pin Deutsch

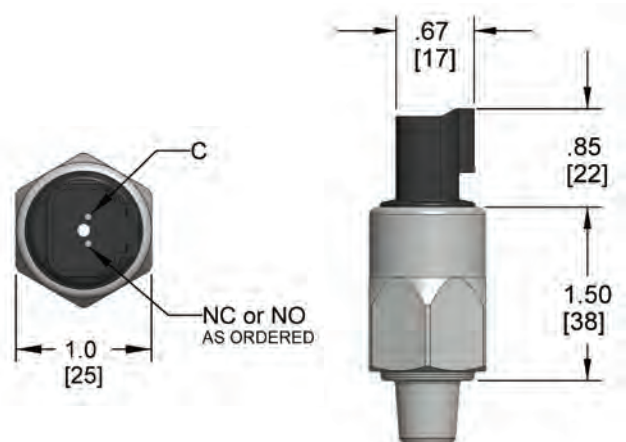
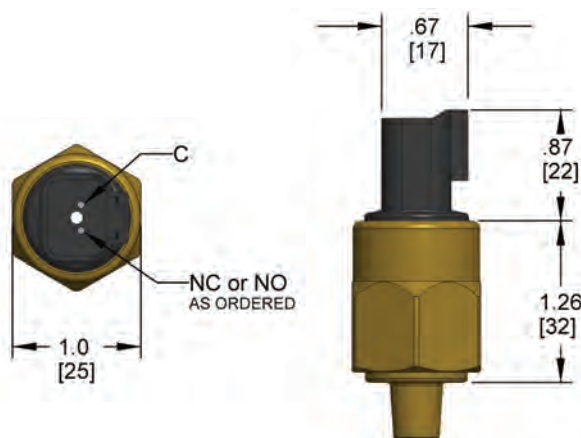


200V & 200L 3-Pin Deutsch



200H 3-Pin Deutsch

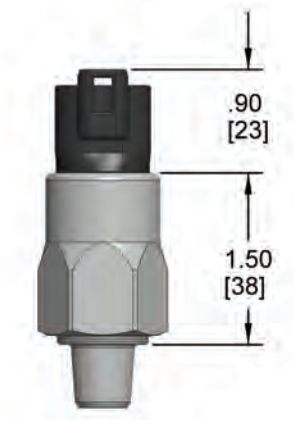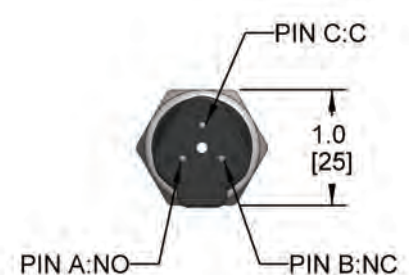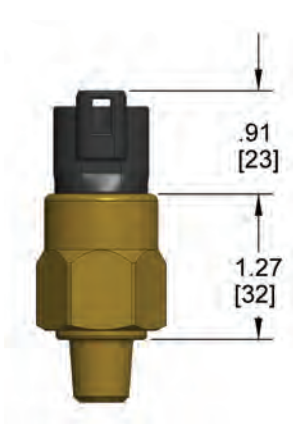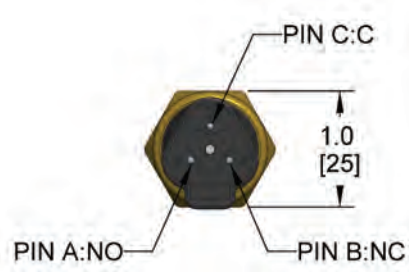


200V & 200L M12 x 1 (3-Pin)

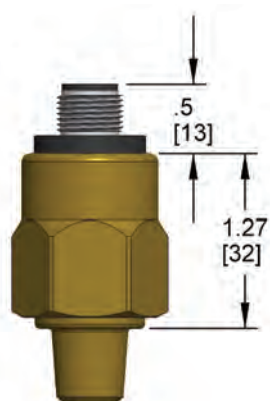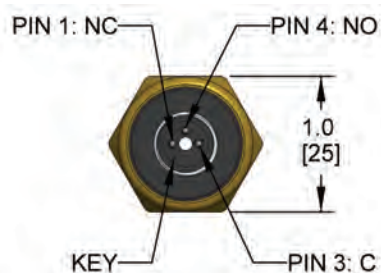


200H M12 x 1 (3-Pin)

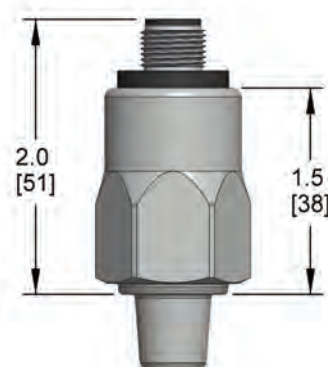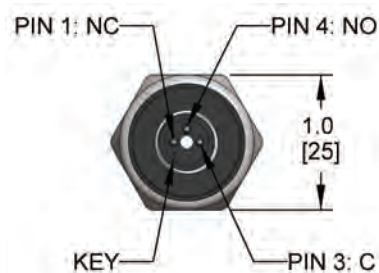



200V & 200L 18" Flying Leads

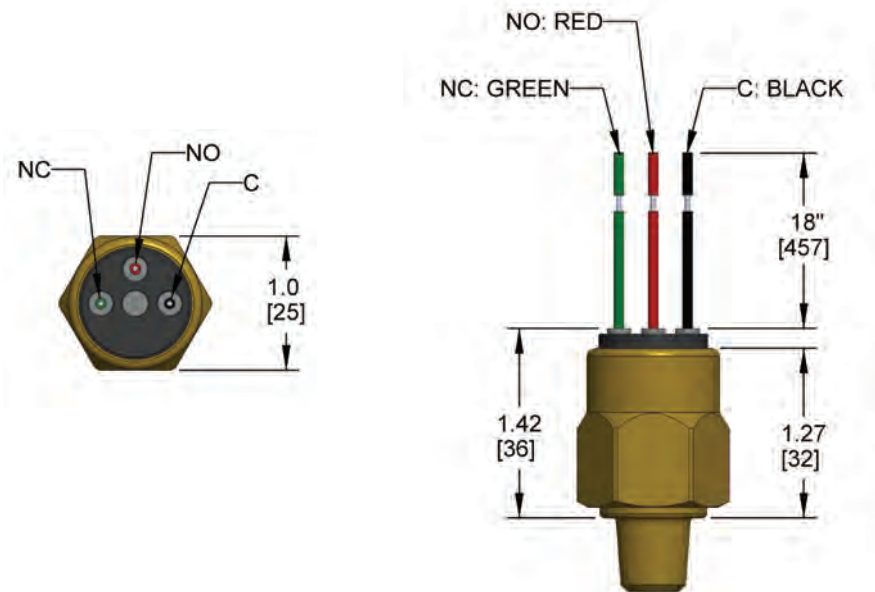



200H 18" Flying Leads

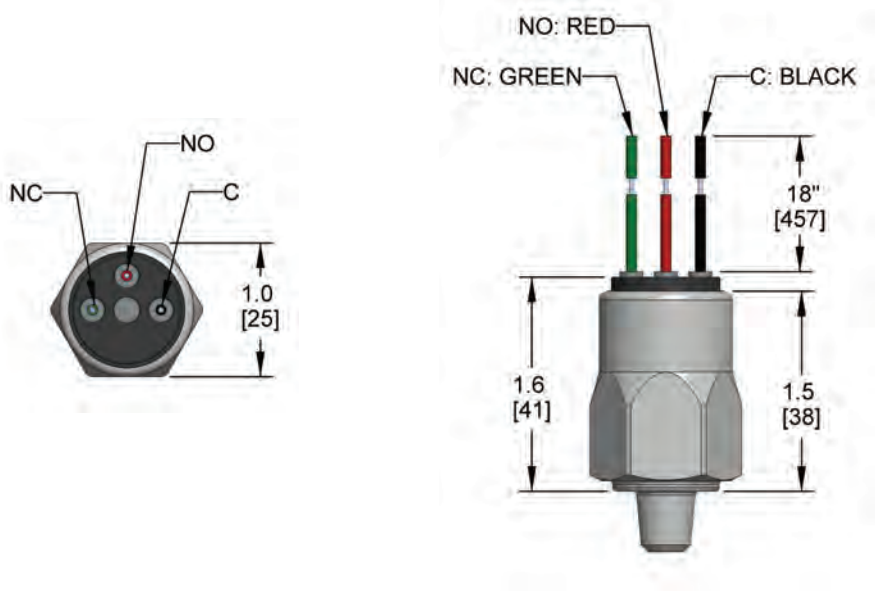

200V & 200 L Terminal Screws

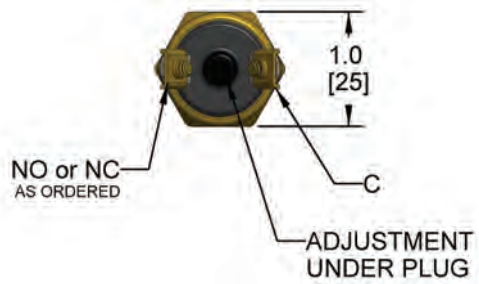

200H Terminal Screws

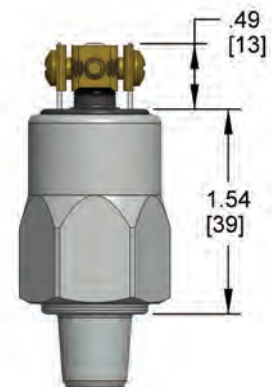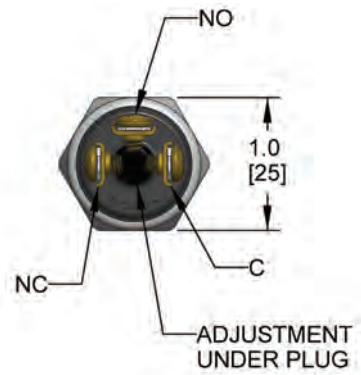



300 SERIES

- Switch adjustment ranges from vacuum through 4,600 psig depending on model
- Standard Zinc-nickel with Buna-N diaphragm wetted parts
- SPST or SPDT snap-action switch with solid Silver contacts
- CE compliant to suppress RFI, EMI and ESD
- RoHS compliant

APPLICATIONS

- Hydraulics & pneumatics
- Pumps & compressors
- Tank monitoring
- Leak detection
- Water management

SPECIFICATIONS

Switching parameters

Function	SPST or SPDT
Contact rating	6A @ 125/250 Vac 6A @ 12/24 Vdc
Repeatability	2% of full set point range at 70 °F
Hysteresis	Adjustable, see charts below
Contact material	Solid Silver, self-cleaning
Frequency	Max. 100 cycles/min

Switch type Snap action with adjustable hysteresis

Pressure ranges -5 inHg to -28 inHg (350 psig) through 450 psig to 4,600 psig (5,000 psig)

Service life >1,000,000 load cycles

Temperature ranges
Media -4 °F to 176 °F (-20 °C to 80 °C)
Ambient -4 °F to 176 °F (-20 °C to 80 °C)
Storage -4 °F to 176 °F (-20 °C to 80 °C)

Proof pressure 870 psig or 5,000 psig depending on adjustment range


Measuring element Buna-N

Housing material Zinc-nickel plated Steel


Environmental rating IP65

Weight Approximately 0.2 lb.

Adjustable Hysteresis (piston type)

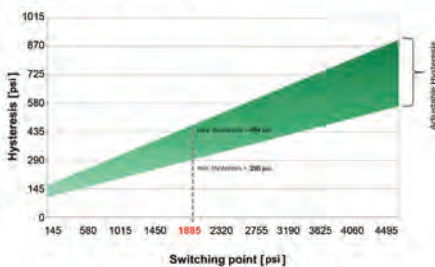

Adjustable Hysteresis (membrane type)

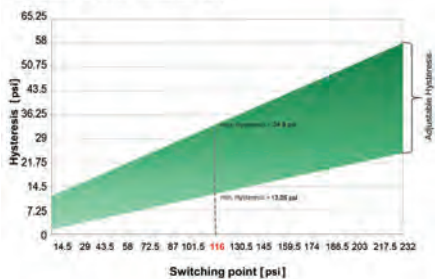

ORDERING INFORMATION			
SERIES	300V 300 Vacuum Series	300H 300 High Pressure Series	
	300L 300 Low Pressure Series		
SWITCH FUNCTIONS	1 SPST, Normally open	3 SPDT	
	2 SPST, Normally closed		
PROCESS CONNECTIONS	1 1/8" NPT male	33 G 1/8B	
	2 1/4" NPT male	45 7/16-20 SAE Male, Non-Adjustable	
	10 G 1/4B		
300V VACUUM PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)	5/28-vac -5 inHg to -28 inHg (350 psig)		
300L LOW PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)	3/7 3 psig to 7 psig (870 psig)	7/120 7 psig to 120 psig (870 psig)	
	3/15 3 psig to 15 psig (870 psig)	15/200 15 psig to 200 psig (870 psig)	
	3/30 3 psig to 30 psig (870 psig)	15/230 15 psig to 230 psig (870 psig)	
	7/70 7 psig to 70 psig (870 psig)	30/290 30 psig to 290 psig (870 psig)	
300H HIGH PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)	100/220 100 psig to 220 psig (5,000 psig)	145/2320 145 psig to 2,320 psig (5,000 psig)	
	145/435 145 psig to 435 psig (5,000 psig)	300/2900 300 psig to 2,900 psig (5,000 psig)	
	145/1160 145 psig to 1,160 psig (5,000 psig)	300/3600 300 psig to 3,600 psig (5,000 psig)	
	145/1750 145 psig to 1,750 psig (5,000 psig)	450/4600 450 psig to 4,600 psig (5,000 psig)	
ELECTRICAL CONNECTIONS†	1 36" Cable attached to option 8	100 Deutsch 2-Pin Male (DT04-2P)*, **	
	8 Hirschmann (DIN EN 175301-803 Form A)	101 Deutsch 3-Pin Male (DT04-3P)*	
	25 M12 x 1 4-Pin	103 Deutsch 2-Pin Female Socket (DT06-2S)*, **	
	36 3' Integral Cable	104 Deutsch 3-Pin Female Socket (DT06-3S)*	
	66 Deutsch Integral 2-Pin (DT04-2P)**	110 Weatherpack Tower, 3-Pin Female*	
	96 Weatherpack Tower, 2-Pin Female*, **	111 Weatherpack Tower, 3-Pin Male*	
	97 Weatherpack Tower, 2-Pin Male*, **	112 Weatherpack Shroud, 3-Pin Female*	
	98 Weatherpack Shroud, 2-Pin Female*, **	113 Weatherpack Shroud, 3-Pin Male*	
	99 Weatherpack Shroud, 2-Pin Male*, **		
OPTIONS***	EP EPDM Diaphragm (-10/250 °F)	VT FKM Diaphragm (0/250 °F)	
	HNBR Low Temp Nitrile (-40/110 °F)	SS 316 SS Wetted Materials	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.


* Options attached to 18" cable

** For SPST only


*** Not all options are available for all ranges, consult factory

† Other electrical connections available, consult the factory


EXAMPLE

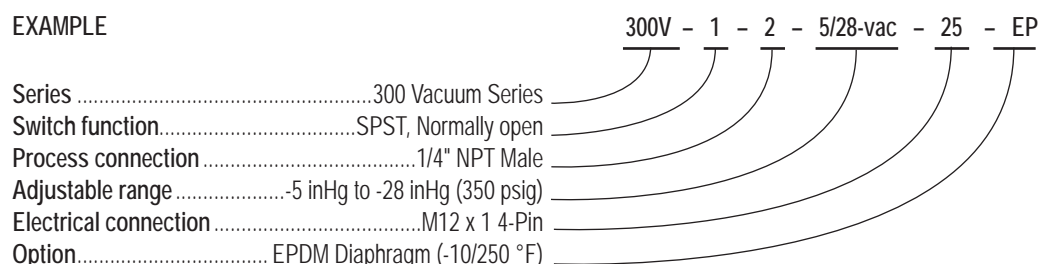


Hirschmann (DIN EN 175301-803 Form A)

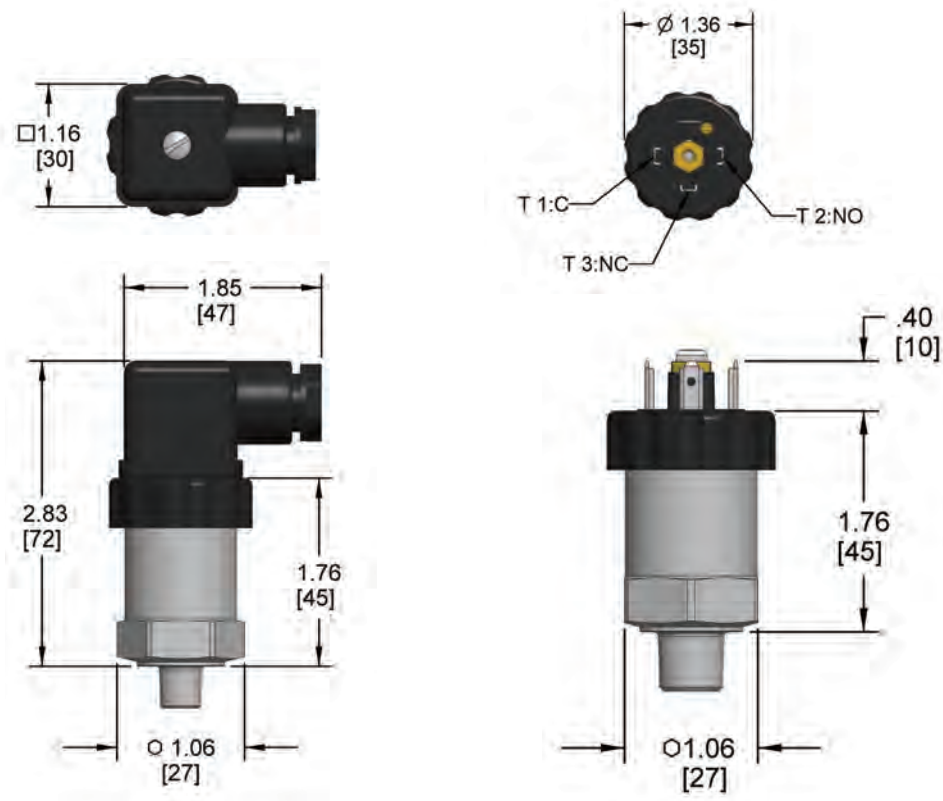


M12 x 1 4-Pin

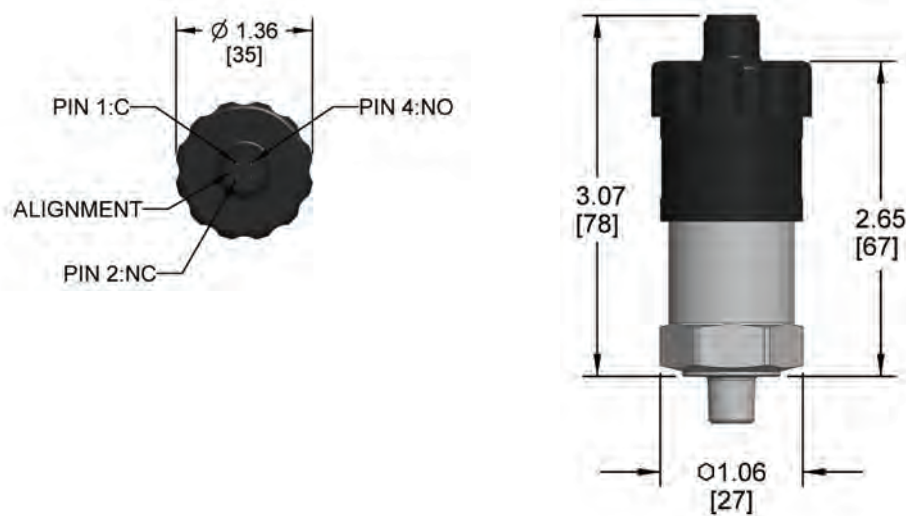

300H 3' Integral Cable

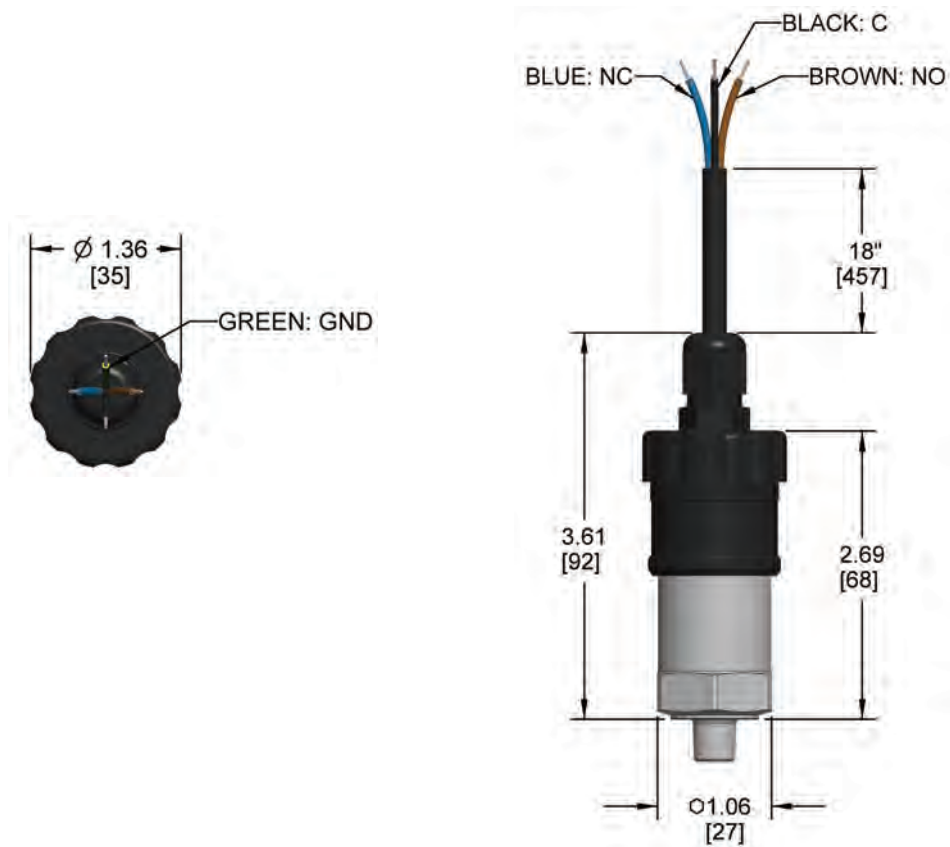

300H Deutsch Integral 2-Pin (DT04-2P)

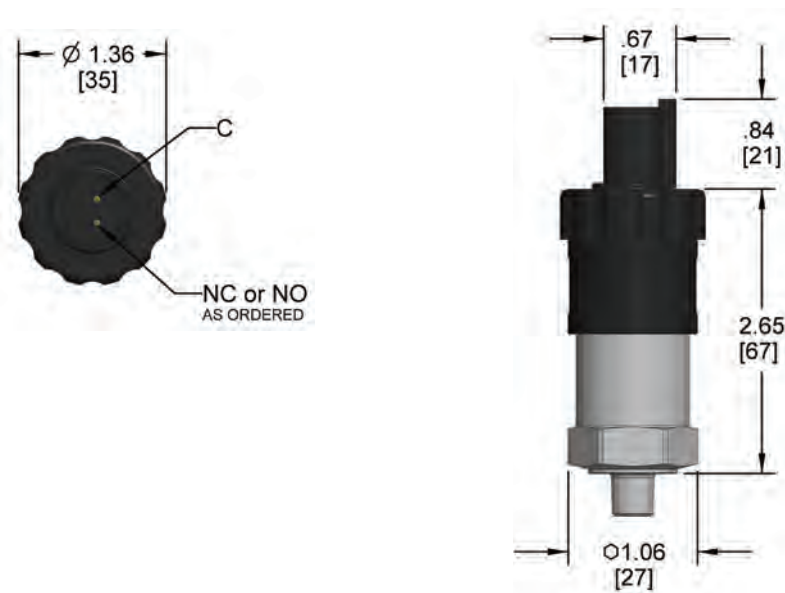



400 SERIES

- Switch adjustment ranges from vacuum through 4,600 psig depending on model
- Standard zinc-plated Steel with NBR diaphragm (< 225 psig); Steel piston with NBR seal (> 225 psig) wetted parts
- SPDT snap-action switch
- CE compliant to suppress RFI, EMI and ESD
- RoHS compliant

APPLICATIONS

- Hydraulics & pneumatics
- Mobile hydraulics
- Power generation
- Pumps & compressors
- Tank monitoring
- Water management

SPECIFICATIONS

Switching parameters	
Function	SPST or SPDT snap-action micro switch
Contact rating	6A @ 125/250 Vac 6A @ 12/24 Vdc
Repeatability	±2% of full scale of adjustment range
Hysteresis	Diaphragm type, 1% to 11% of adjustment range full scale Piston type, 2% to 8% of adjustment range full scale
Contact material	Solid Silver, self-cleaning
Frequency	Max. 200 cycles/min.
Pressure ranges	0 psig to 300 psig through 0 psig to 5,000 psig Adjustment knob from 3 psig to 4,600 psig dependent on full scale range
Service life	>1,000,000 load cycles
Temperature ranges	Media -4 °F to 176 °F (-20 °C to 80 °C) Ambient -4 °F to 176 °F (-20 °C to 80 °C) Storage -13 °F to 185 °F (-25 °C to 85 °C)
Proof pressure	300 psi or 5,000 psi depending on adjustment range
Measuring element	NBR diaphragm ≤ 230 psig Stainless Steel piston with NBR seal ≥ 500 psig 1/4" NPT and 7/16-20 SAE zinc-plated Steel connections standard, others available on request
Housing material	Zinc die-cast
Environmental rating	IP65 for Hirschmann IP67 for M12 x 1
Electromagnetic rating	CE compliant to EU Standard 73/23/EWG RFI, EMI and ESD protection
Shock	30 g's according to IEC 60068-2-27
Vibration	10 g's according to IEC 60068-2-6
Weight	Approximately 0.66 lb.



ORDERING INFORMATION			
SERIES	400V 400 Vacuum Series	400H 400 High Pressure Series	
	400L 400 Low Pressure Series		
SWITCH FUNCTION	3 Single Pole Double Throw (SPDT)		
PROCESS CONNECTIONS	2 1/4" NPT male	19 G 1/4 B female	
	5 1/4" NPT female	45 7/16-20 SAE Male, Non-Adjustable	
	10 G 1/4 B male		
400V VACUUM PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)	5/28-vac -5 inHg to -28 inHg (350 psig)		
400L LOW PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)	3/30 3 psig to 30 psig (870 psig)	15/230 15 psig to 230 psig (870 psig)	
	7/120 7 psig to 120 psig (870 psig)		
400H HIGH PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)	145/435 145 psig to 435 psig (5,000 psig)	300/2900 300 psig to 2,900 psig (5,000 psig)	
	145/1160 145 psig to 1,160 psig (5,000 psig)	300/3600 300 psig to 3,600 psig (5,000 psig)	
	145/1750 145 psig to 1,750 psig (5,000 psig)	450/4600 450 psig to 4,600 psig (5,000 psig)	
	145/2320 145 psig to 2,320 psig (5,000 psig)		
ELECTRICAL CONNECTIONS†	1 36" Cable (connected to option 8)	25 M12 x 1 4-Pin*	
	8 Hirschmann Connector (DIN EN 175301-803 Form A)	46 Hirschmann with LED Status Indicator	
OPTIONS	EP EPDM Diaphragm (-40/212 °F)	VT FKM Diaphragm (0/212 °F)	
	HNBR Low Temp NBR (-40/176 °F)		

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.



* Available in adjustment ranges to 225 psig

† Other electrical connections available, consult factory


EXAMPLE

Series	400 Vacuum Series	400V	-	3	-	2	-	5/28-vac	-	8
Switch function.....	Single pole double throw									
Process connection.....	1/4" NPT Male									
Adjustable range	-5 inHg to -28 inHg (350psig)									
Electrical connection	Hirschmann connector									


Switching Output Schematic



400H Hirschmann (DIN EN 175301-803 Form A)

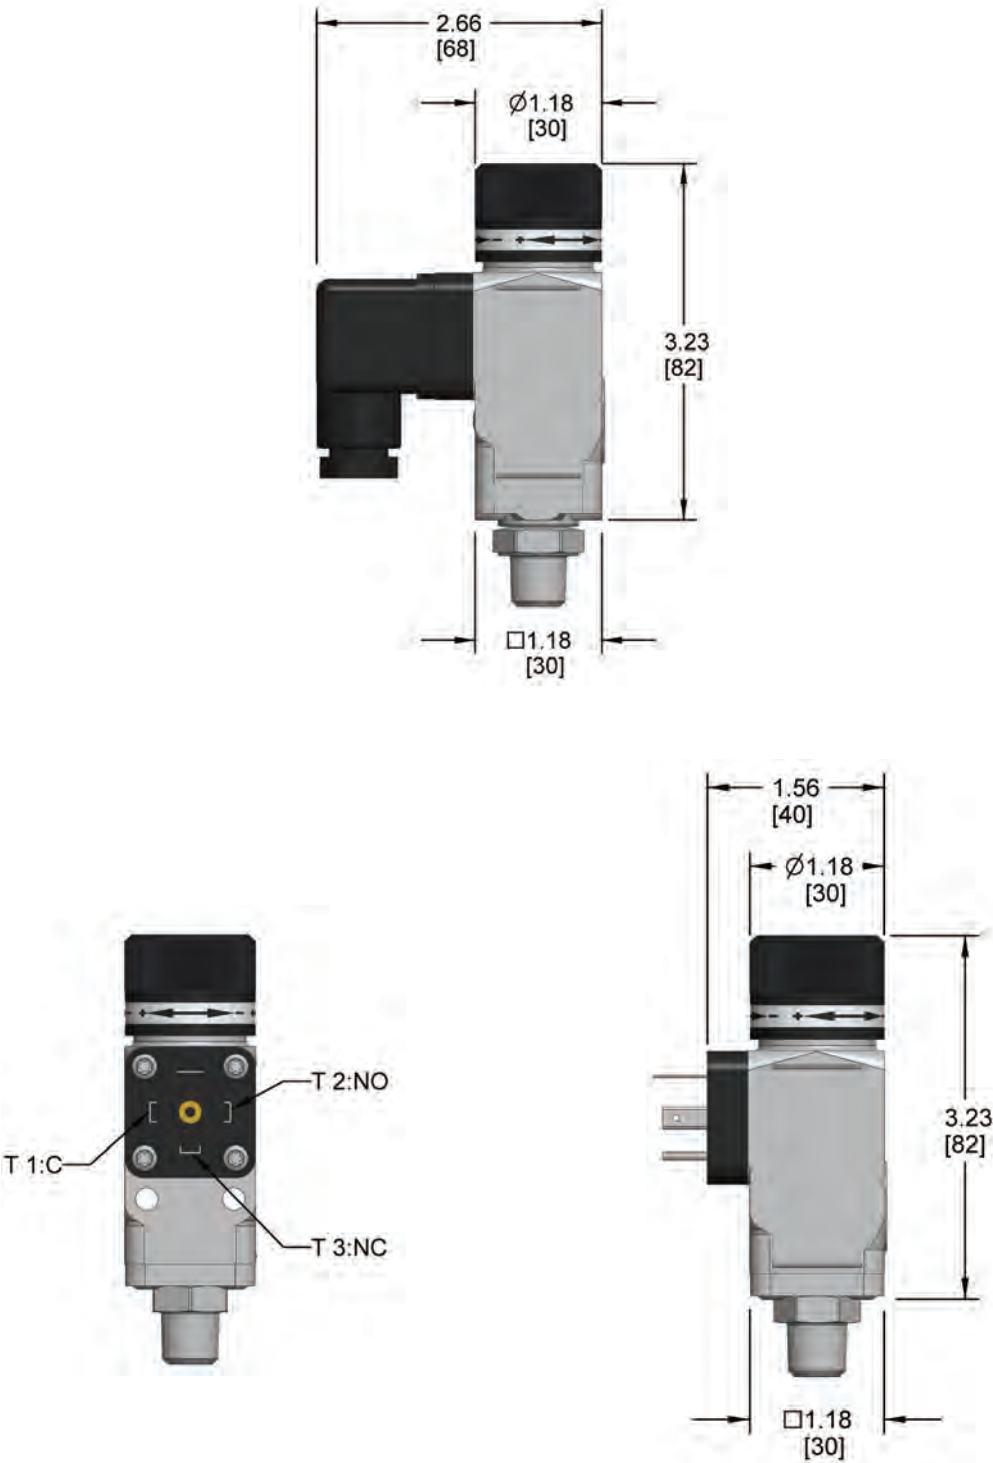

400H M12 x 1 4-Pin

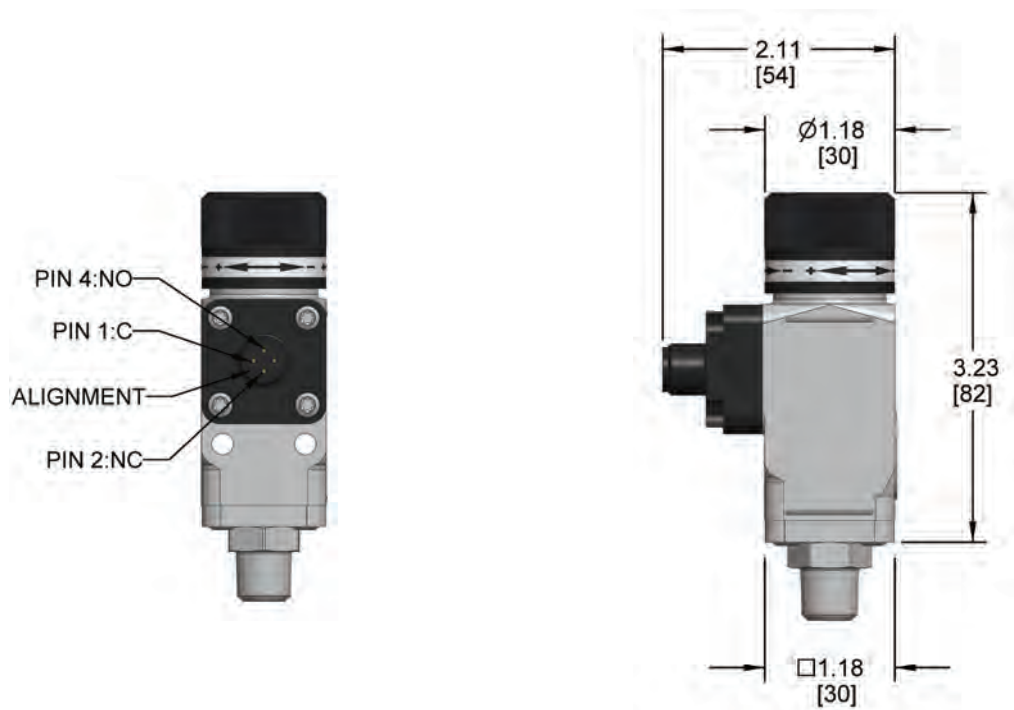



APPLICATIONS

- Hydraulics & pneumatics
- Power generation
- Pumps & compressors
- Stamping & forming presses
- Water & wastewater

800 SERIES

- Compound and standard ranges from 0 psig to 10 psig through 0 psig to 7,500 psig
- 316L Stainless steel wetted parts
- Current and voltage outputs available
- 7 different output configurations available
- Display and electrical connection can be rotated independently
- CE compliant to suppress RFI, EMI and ESD
- RoHS compliant

SPECIFICATIONS

Pressure ranges	Compound and standard ranges from 0 psig to 10 psig through 0 psig to 7,500 psig
Switching parameters	Individually adjustable via external control keys
Number	1 or 2 (PNP or NPN)
Function	N.O., N.C., window, hysteresis (freely adjustable)
Contact rating	250 mA max.
Response time	≤5 ms
Accuracy	≤ 0.5 % of span
Switch point	.25 to 100% of full scale
Hysteresis	Fully adjustable
Transmitter parameters	
Output signal	4 mA to 20 mA or 0 Vdc to 10 Vdc; programmable and freely adjustable
Accuracy	±0.5% of span including non-linearity, hysteresis, zero offset and end value deviation (corresponds to measured error per IEC 61298-2)
Non-repeatability	< 0.1% of span (IEC 61298-2)
Adjustment	Freely scalable within the range of 5:1
Service life	100,000,000 load cycles
Temperature ranges	Compensated 32 °F to 176 °F (0 °C to 80 °C) Media -4 °F to 185 °F (-20 °C to 185 °C) Ambient -4 °F to 176 °F (-20 °C to 80 °C) Storage -4 °F to 158 °F (-20 °C to 70 °C)
Display	14 segment-LED, red 4-digit, height 0.35"
Power requirement*	15 - 35 Vdc
Current consumption	Max. 45 mA for versions without 4-20 mA output signal, Max. 70 mA for versions with 4-20 mA output signal, Total consumption max. 600 mA including switching current
Proof pressure	2 times full scale
Measuring element	<150 psi: 316L Stainless steel ≥150 psi: 316L, PH grade Stainless steel
Housing material	304 Stainless steel
Connection	316 stainless steel
Environmental rating	IP65 and IP67 per IEC 60529
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014/A1:1998 RFI, EMI and ESD protection
Electrical protection	Protected against reverse polarity, over-voltage and short circuit
Shock	> 50 g's according to IEC 60068-2-27
Vibration	> 20 g's according to IEC 60068-2-6
Weight	Approx 0.49 lb.

* Unregulated

ORDERING INFORMATION									
SERIES	800	304 Stainless steel housing							
SWITCH FUNCTIONS	1	2 N.O. or N.C. (PNP or NPN)			5	2 N.O. or N.C. switch (PNP/NPN) with 0 Vdc to 10 Vdc 3-wire output *			
	2	1 N.O. or N.C. (PNP or NPN) with 4 mA to 20 mA 3-wire analog output			6	1 N.O. or N.C. switch (PNP/NPN) with 4 mA to 20 mA/0 Vdc to 10 Vdc 3-wire output 2 **			
	3	1 N.O. or N.C. (PNP or NPN) with 0 Vdc to 10 Vdc 3-wire output			7	2 N.O. or N.C. switch (PNP/NPN) with 4 mA to 20 mA/0 Vdc to 10 Vdc 3-wire output *,**			
	4	2 N.O. or N.C. (PNP or NPN) with 4 mA to 20 mA analog output *							
PROCESS CONNECTIONS	2	1/4" NPT male		10	G 1/4 B male		45	7/16-20 SAE J514 FIG 34B (Non-Adjustable)	
	8	1/2" NPT male		11	G 1/2 B male				
ADJUSTABLE RANGES (Max. working pressure)	14.5vac	-14.5 psig to 0 psig		15	0 psig to 15 psig		1000	0 psig to 1,000 psig	
	14.5/15	-14.5 psig to 15 psig		25	0 psig to 25 psig		1500	0 psig to 1,500 psig	
	14.5/30	-14.5 psig to 30 psig		30	0 psig to 30 psig		2000	0 psig to 2,000 psig	
	14.5/50	-14.5 psig to 50 psig		50	0 psig to 50 psig		3000	0 psig to 3,000 psig	
	14.5/100	-14.5 psig to 100 psig		100	0 psig to 100 psig		5000	0 psig to 5,000 psig	
	14.5/160	-14.5 psig to 160 psig		160	0 psig to 160 psig		7500	0 psig to 7,500 psig	
	14.5/200	-14.5 psig to 200 psig		200	0 psig to 200 psig		10A	0 psia to 10 psia	
	14.5/300	-14.5 psig to 300 psig		300	0 psig to 300 psig		15A	0 psia to 15 psia	
	10	0 psig to 10 psig		500	0 psig to 500 psig		25A	0 psia to 25 psia	
ELECTRICAL CONNECTIONS	2	M12 x 1 (4-pin)		3	M12 x 1 (5-pin), 2 switch and analog output				
OPTIONS	ST8	Threaded Orifice							

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.








* Available only with a M12 x 1 (5-pin) connector

** Can switch between 4 mA to 20 mA / 0 Vdc to 10 Vdc

EXAMPLE

800 - 1 - 2 - 160 - 2 - ST8

Series 800 Series
 Switch function..... 2 N.O. or N.C. (PNP or NPN)
 Process connection 1/4" NPT Male
 Adjustable range 0 psig to 160 psig
 Electrical connection M12 x 1 (4-pin)
 Option..... Threaded Orifice

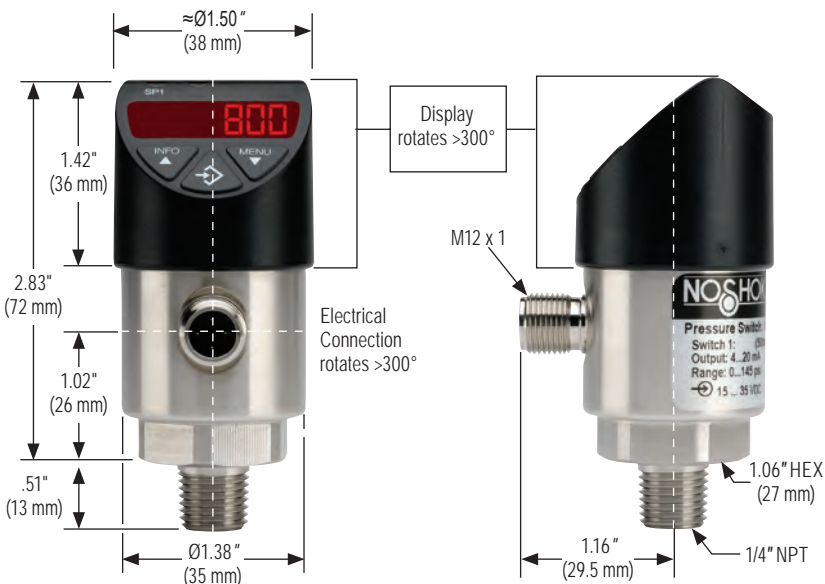

† Also applies to 0 Vdc to 10 Vdc output

All Pressure Measurement Instrumentation Options & Accessories

PISTON-TYPE SNUBBERS

- Resist clogging and are self cleaning
- Five different sized pistons included with each snubber to ensure the correct amount of snubbing for virtually every application
- Available in Brass and 316 Stainless Steel in 1/4" NPT, 1/2" NPT or SAE J1926-3: 7/16-20
- Weight approximately 0.2 lb. for 1/4" & 7/16", and approximately 0.4 lb. for 1/2"

Options & Accessories


Piston-Type Snubbers Specifications

PART NO.	SIZE	MATERIAL	PRESSURE RATING
1325	1/4" NPT	Brass	6,000 psi
1335	SAE J1926-3:7/16-20	Brass	5,000 psi
1350	1/2" NPT	Brass	6,000 psi
5025	1/4" NPT	316 Stainless Steel	15,000 psi
5035	SAE J1926-3:7/16-20	316 Stainless Steel	8,000 psi
5050	1/2" NPT	316 Stainless Steel	15,000 psi



Piston-Type Snubbers

DIMENSIONS		1/4" NPT	1/2" NPT	SAE J1926-3: 7/16-20
A	IN	0.812	1.125	0.812
	MM	20.6	28.6	20.6
B	IN	1.60	1.875	1.60
	MM	40.6	47.6	40.6
C	IN	1.04	1.25	1.24
	MM	26.4	31.8	31.5
D	IN	0.56	0.625	0.36
	MM	14.2	15.9	9.1

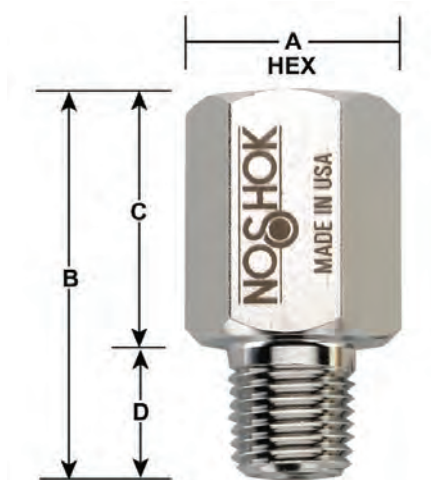

PISTON	SUGGESTED USE
A, B*	Gases
B, C	Water
C, D	Light Oil
E	Heavy Oil

* Snubber assembled and shipped with the B piston installed

For products shown that are composed of Brass or Carbon Steel:



WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

For products shown that are composed of Stainless Steel:



WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

SINTERED SNUBBERS

- Cost effective solution to protect expensive instrumentation
- Increases gauge readability by smoothing out pressure surges, pulsations and spikes
- 5 basic elements available for each snubber to accommodate specific application needs
- Snubbing action achieved by utilizing a corrosion resistant 316 Stainless Steel sintered porous element
- Exotic materials or intermediate disc grades available
- Provides long service life with no moving parts to wear out
- Weight approximately 0.2 lb. for 1/4" & 7/16", and approximately 0.4 lb. for 1/2"




Sintered Snubbers

Options & Accessories Sintered Snubbers Specifications

PART NO.	SIZE	MATERIAL	PRESSURE RATING
1125-X	1/4" NPT	Brass	6,000 psi
1135-X	SAE J1926-3:7/16-20	Brass	5,000 psi
1150-X	1/2" NPT	Brass	6,000 psi
5125-X	1/4" NPT	316 Stainless Steel	15,000 psi
5150-X	1/2" NPT	316 Stainless Steel	15,000 psi

Note: The "X" in the part number denotes the Disc option (example: 1135-C).
See chart below for Disc options.

DIMENSIONS		1/4" NPT	1/2" NPT	SAE J1926-3 :7/16-20
A	IN	0.812	1.125	0.812
	MM	20.6	28.6	20.6
B	IN	1.60	1.875	1.60
	MM	40.6	47.6	40.6
C	IN	1.04	1.25	1.24
	MM	26.4	31.8	31.5
D	IN	0.56	0.625	0.36
	MM	14.2	15.9	9.1

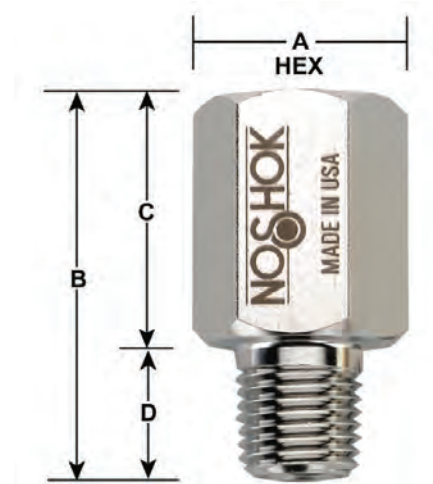

Sintered Snubbers Replacement Disc Options

DISC GRADE	PART NO.	AVERAGE AIR FLOW ESTIMATE	MICRON GRADE (reference)	SUGGESTED USE
A	PD8-A-SS1	0.25 L/MIN @ 1 psi	2	Gases
B	PD8-B-SS1	0.63 L/MIN @ 1 psi	10	Gases, Water
C	PD8-C-SS1	1.46 L/MIN @ 1 psi	20	Water, Light Oil
D	PD8-D-SS1	2.79 L/MIN @ 1 psi	40	Light Oil
E	PD8-E-SS1	3.14 L/MIN @ 1 psi	60	Heavy Oil



Sintered Snubbers Replacement Discs

All Pressure Measurement Instrumentation Options & Accessories

PIGTAIL STEAM SYPHONS

- Protect the instrument from the damaging effects of high temperature steam
- Recommended for use in steam applications and systems that contain superheated vapor
- Available in 1/4 "and 1/2 "NPT sizes in welded Steel, welded 316 Stainless Steel or seamless 316 Stainless Steel with ratings to 3,800 psi @ 850 °F





Product Specifications

PART NO.	COIL STYLE	SIZE	MATERIAL
1225	90°	1/4" NPT	Welded Steel, schedule 40
1250		1/2" NPT	Welded Steel, schedule 80
2225		1/4" NPT	Welded 316SS, schedule 40
2250		1/2" NPT	Seamless 316SS, schedule 80
1025	180°	1/4" NPT	Welded Steel, schedule 40
1050		1/2" NPT	Welded Steel, schedule 80
2025		1/4" NPT	Welded 316SS, schedule 40
2050		1/2" NPT	Seamless 316SS, schedule 80
1425	270°	1/4" NPT	Welded Steel, schedule 40
1450		1/2" NPT	Welded Steel, schedule 80
2325		1/4" NPT	Welded 316SS, schedule 40
2350		1/2" NPT	Seamless 316SS, schedule 80
1525	360°	1/4" NPT	Welded Steel, schedule 40
1550		1/2" NPT	Welded Steel, schedule 80
2525		1/4" NPT	Welded 316SS, schedule 40
2550		1/2" NPT	Seamless 316SS, schedule 80



Pigtail Steam Syphons

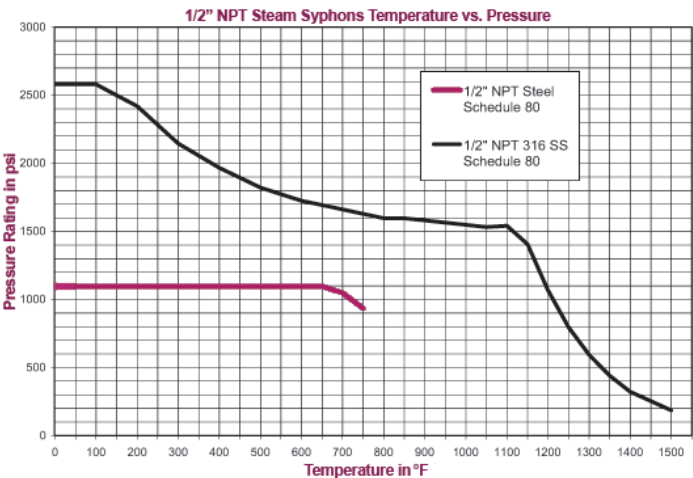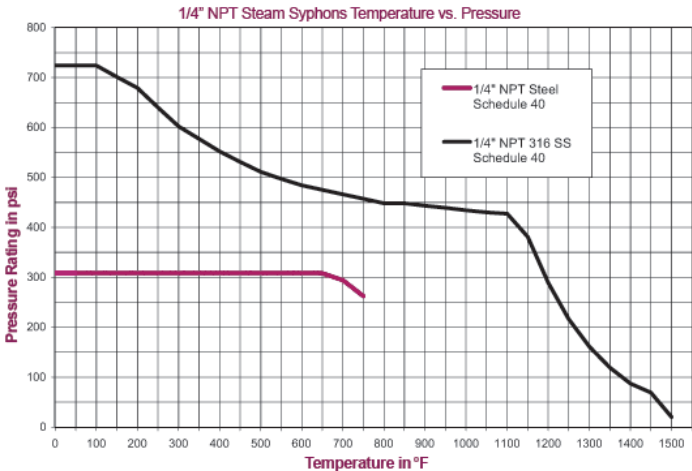

For products shown that are composed of Brass or Carbon Steel:







WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

For products shown that are composed of Stainless Steel:




WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

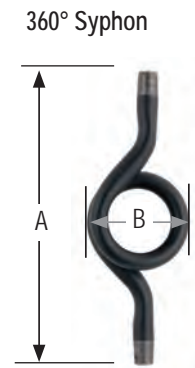

CONNECTION SIZE			1/4" NPT	1/2" NPT
90°	A	IN MM	4.25 107.95	6.5 165.1
	B	IN MM	2.625 66.675	4.0 101.6
180°	A	IN MM	5.5 139.7	8.875 225.425
	B	IN MM	2.5 63.5	4.0 101.6
270°	A	IN MM	4.5 114.3	7.5 190.5
	B	IN MM	2.625 66.675	4.0 101.6
360°	A	IN MM	7.25 184.15	12.0 304.8
	B	IN MM	2.625 66.675	4.125 104.775

SWIVEL ADAPTORS

- Temperature ratings: 15,000 psi @ 200 °F and 3,000 psi @ 1,000 °F
- Used with gauges and gauge valves to adjust the line of sight
- Rotates 360° to allow the connected instrument to be positioned in the desired direction
- The pressure connection is achieved with a tapered cone style compression fitting simply by tightening the swivel hex nut
- All 316 Stainless Steel construction
- Standard with 1/2" NPT male process – 1/2" NPT female instrument connections
- Also available with 1/4" NPT connections, same specifications apply
- Weight approximately 0.8 lb.

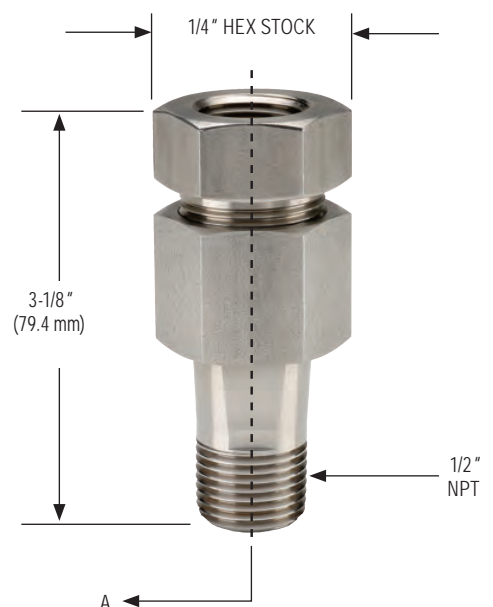

WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Gauge Configurations for High Temperature Applications

140 °F is the maximum recommended ambient media temperature for NOSHOK pressure gauges with Brass wetted parts, and 212 °F for gauges with Stainless Steel wetted parts. For applications in which media reaches temperatures above 212 °F, NOSHOK offers several accessories designed to prevent damage to the gauge, and maintain maximum performance and accuracy.

Recommended gauge configurations are listed below. Please note that these guidelines are intended to be general recommendations. Many conditions may affect the amount of temperature reduction; including ambient temperature, media type, and process configuration.

- **Up to 140 °F:** All NOSHOK pressure gauges will provide peak performance in this range
- **Up to 212 °F:** A gauge with Stainless Steel wetted parts is required, such as the NOSHOK 400 and 740 Series. Do NOT use a gauge with Brass wetted parts.
- **Up to 287 °F:** Accessories must be used to maintain gauge integrity and accuracy. Options include:
 - o **Pigtail Steam Syphon:** For use with a Stainless Steel wetted parts gauge. Should be used in steam applications and systems that contain superheated vapor. The pigtail buffers the instrument from the damaging effects of high temperature steam by holding system fluid in the coil to provide a steam trap for the fluid to condensate and dissipate the heat. Reduces temperature by 75° F/ft. on average. Multiple configurations are available.
 - o **Armored Capillary Tube:** For use with a Stainless Steel wetted parts gauge. Average temperature reduction is 75 °F/ft. Two feet of capillary tube can increase the media temperature range to 362 °F. Standard length is five feet, provided with thread connections; other lengths available on request. Gauge must be separated from the process with a mounting bracket or flange, and the extra capillary length can be rolled up if necessary. Recommended for use with clean media or gases.
 - o **Long Pipe:** 1/2" in diameter or greater in either Steel or Stainless Steel construction with a Stainless Steel wetted parts gauge. Average temperature reduction is 75 °F/ft. Pipes can be cut and threaded for custom applications.
 - o **Cooling Element:** For use with a Stainless Steel wetted parts gauge. Average temperature reduction is 75 °F/4" element. Use with other accessories for additional temperature decrease (long pipe, syphon, diaphragm seal).
 - o **Cooling Tower:** For use with a Stainless Steel wetted parts gauge. Approved usage up to temperatures of 312 °F. Average temperature reduction is 100 °F/8" cooling tower. Recommended for use with clean media or gases.
- **Up to 300 °F:** A high temperature system fill is required, such as silicone D.C 550, and a diaphragm seal is recommended on a Stainless Steel wetted parts gauge.

For more information, contact NOSHOK at 440.243.0888

The technology used in today's pressure gauges has been around since the mid-eighteen hundreds, and the pressure gauge is still one of the most common methods of measuring pressure today. The majority of pressure gauges today still incorporate the Bourdon tube, socket, and geared movement; along with a pointer and dial to indicate process pressure.

Since the pressure gauge is a purely mechanical device, attention to three process conditions is necessary. The three factors that can adversely affect accuracy and performance are **Temperature, Vibration and Pulsation**.

Temperature Influence:

For every 18 °F (10 °C) shift in temperature from which the gauge is calibrated, the user can experience up to a $\pm 0.4\%$ additional error. The cause is the change in the elasticity or spring rate of the Bourdon tube element with temperature. While it is difficult to circumvent the influence of ambient temperature, we can address the influence of process temperature. In steam service, the common practice is to install coil syphons or pigtail syphons to dissipate process heat. Another common practice is to install a diaphragm seal with capillary to separate the gauge from the high heat source. There are many options available with fill fluid in the seal and capillary system to withstand temperatures up to 600 °F. In severe cold ambient conditions, many users elect to heat trace their instrumentation via electric or steam trace. Process and ambient temperature is an important consideration when selecting and applying pressure gauges.

Vibration Influence:

Vibration due to pumps, motors, and other rotating equipment can cause excess wear and possible premature failure of internal working parts of a pressure gauge, which include the Bourdon tube and the movement or gear mechanism. Vibration also causes difficulty in accurate reading of the gauge, due to pointer oscillation. One of the most common causes of pressure gauge failure is exposure to continuous vibration. The most widely accepted remedy is to utilize a liquid filled pressure gauge. The fill fluid of choice is either Glycerin or Silicone. Liquid filled gauges address not only pointer oscillation, but also serve to protect and lubricate the internal geared movement.

Pulsation Influence:


Process pulsation can occur around the discharge of pumps as well as quick operating valves. Many users assume that liquid filling a pressure gauge will fully address pulsation. Although a liquid filled gauge helps to dampen the effects of pulsation, it often does not fully address this process condition. Pulsation dampeners are installed upstream of the gauge socket and they can be a piston-type snubber, a sintered metal snubber, or a threaded in-flow restrictor in the socket of the gauge. A needle valve installed upstream of the gauge that is "pinched down" or slightly opened, is another common practice to address pulsation. It is not recommended to rely solely on a needle valve to address pulsation, due to the fact that the user could inadvertently open the valve, and thereby negate flow restriction. In clean fluids (gases or clean low viscosity liquids) a threaded orifice/flow restrictor or a sintered metal snubber is the least costly way to address pulsation. In dirtier and higher viscosity fluids a piston snubber is usually installed.

Summary:


Temperature, vibration and pulsation are three process conditions that adversely affect a pressure gauge. Being aware of these three process conditions, and taking the necessary steps to address them, can help minimize accuracy errors and add to the service life of the pressure gauge.

NOSHOK Transducer and Transmitter Pressure Sensing Technologies


Diffused Silicon Semiconductor Strain Gauge Sensor (used in 100, 200, 612, 613, 615, 616, 621, 622, 623, 624, 625, 626, 627, 640 and 650 Series - ranges up to 0 psi to 300 psi)

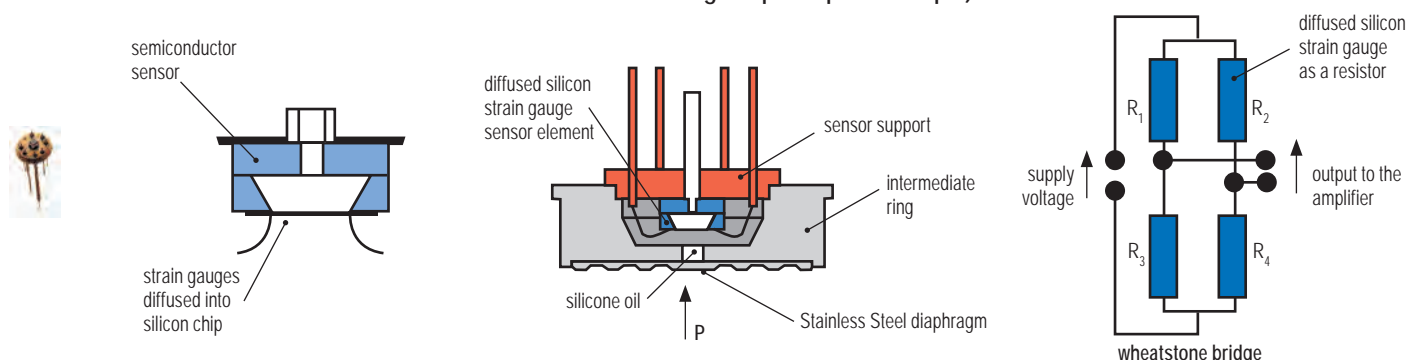


Sputtered Thin Film Strain Gauge Sensor (used in 100, 200, 612, 613, 615, 616, 621, 622, 623, 624, 625, 626, 627, 640, 650, 660, 800/810 Series - ranges 0 psi to 500 psi and higher)

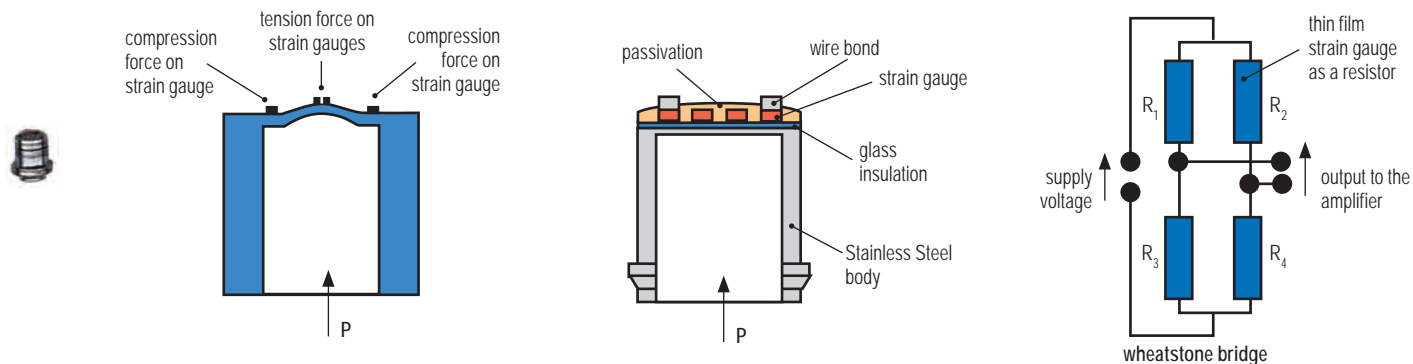


Ceramic Thick Film Strain Gauge Sensor (used in 800/810 and 1000 Series)

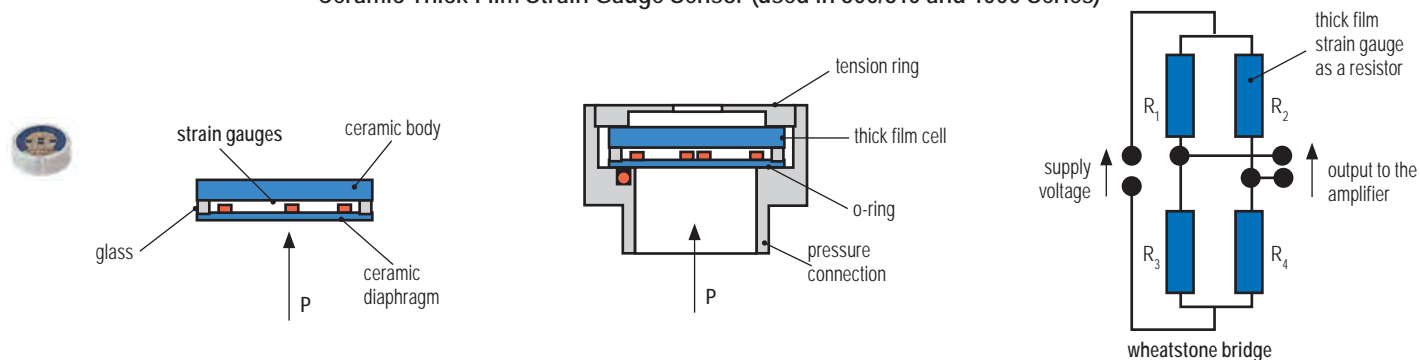

Hall Effect Sensor

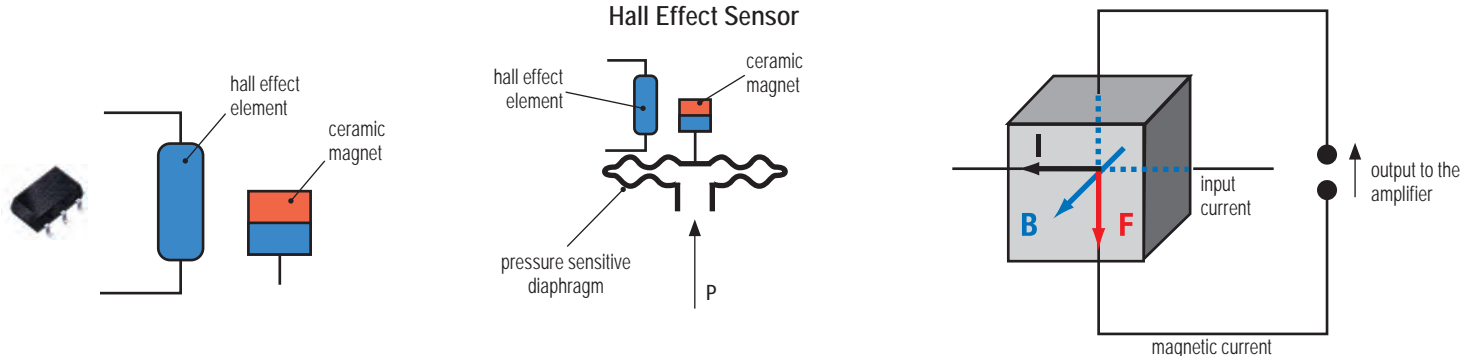

Accuracy according to IEC 61298-2

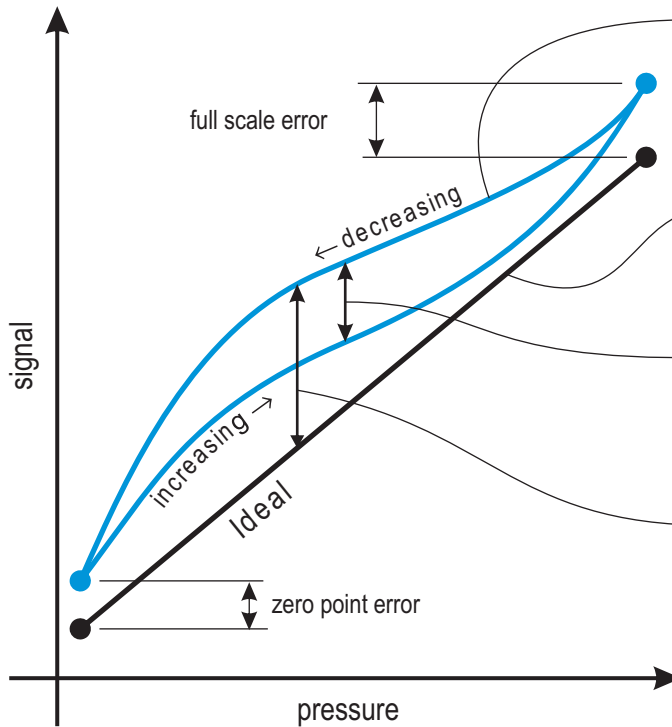

Definitions

Characteristic Curves:

A smooth curve generated through data points recorded from actual input pressures and output signals at increasing and decreasing pressures (upscale and downscale readings)

Ideal Characteristic Line :

A straight line representing an ideal linear relationship between the input pressure and output signal.

Hysteresis:

The maximum difference between the characteristic lines recorded at increasing and decreasing pressure. Expressed in percent of ideal span.


Accuracy :

The maximum deviation from an ideal characteristic line including the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors. Expressed in percent of ideal span

Non-Repeatability :

The maximum deviation between values of output for any single input of multiple cycles considering decreasing and increasing pressures separately. Expressed in percent of ideal span.

Non-linearity according to IEC 61298-2

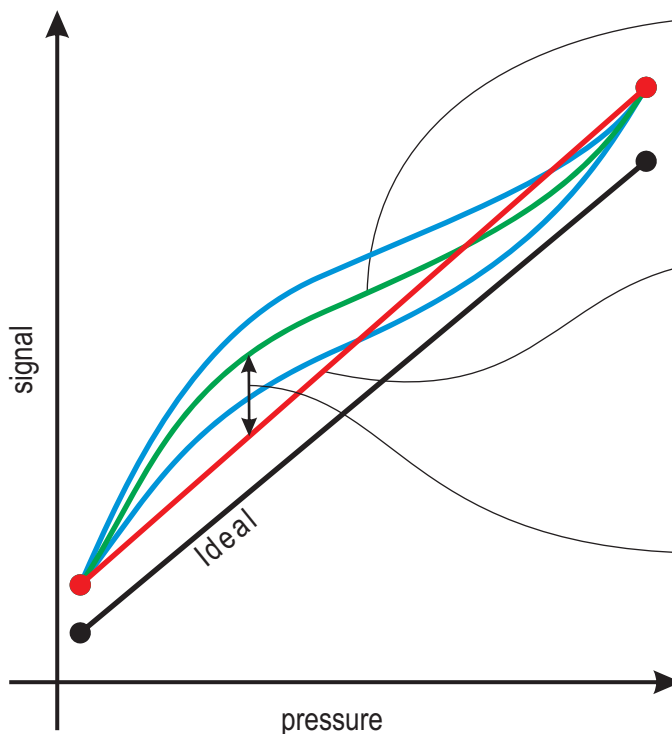

Averaged Characteristic Curve:

A single curve generated through the averaged data of input pressures and output signals at increasing and decreasing pressures. (average of upscale and downscale curves)


Reference line (TP or BFSL):

A straight line coinciding with the actual output data and the averaged characteristic curve.
(TP) Terminal Point connects the actual zero point value and the full scale value
(BFSL) Best Fit Straight Line connects the data using the least square method to minimize the maximum deviation
 $TP \cong 2 \times BFSL$

Non-Linearity:

The maximum deviation from the averaged characteristic line to the reference line. Expressed in percent of ideal span.

Thermal Performance of NOSHOK Pressure Transducers

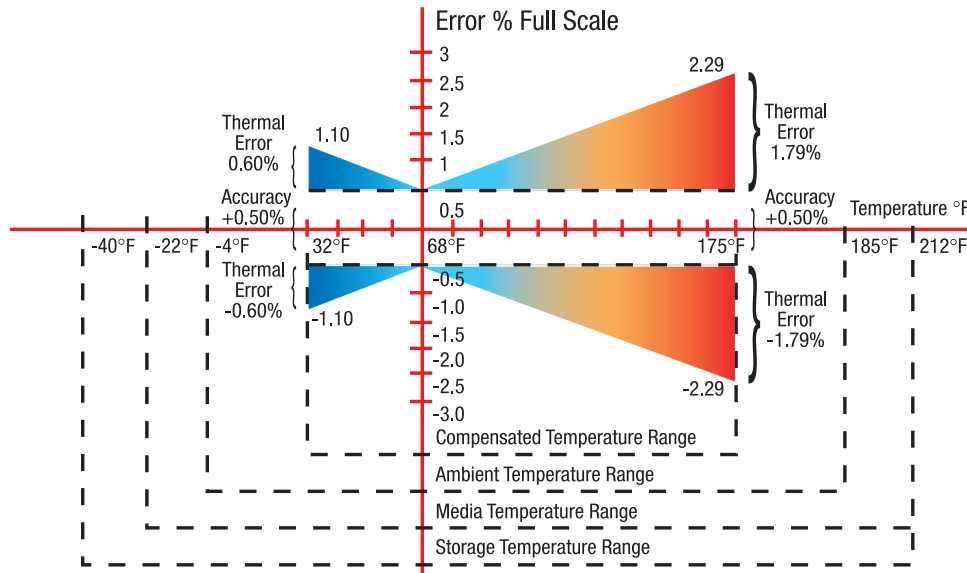

Temperature Performance 100 Series Pressure Transmitter

The above diagram illustrates transducer performance related to the temperature of the environment and media being measured.

The graph shows the worst case performance of the series 100 pressure transmitter as an example (other series follow the same pattern). The thermal specification as indicated in the 100 series specifications is given in a worst case coefficient for the combined effects on zero and span. The definitions are as follows.


The **Compensated Temperature Range** is the thermal band over which the effect specification is guaranteed. For the 100 series, the coefficient is $\pm 0.0167\%$ full scale per $^{\circ}\text{F}$. This means that over the compensated temperature range the thermal boundaries are straight lines as shown. This is sometimes called a “bow-tie effect” or “butterfly effect”.

The **Ambient Temperature Range** is the maximum and minimum ratings over which the transducer will output a correct signal.


The **Media Temperature Range** is the maximum and minimum ratings of the media at the process connection.

The **Storage Temperature Range** is the maximum and minimum ratings for no damage on the shelf.

The Minimum Power Supply Voltage Required For A 2-Wire 4 mA to 20 mA Loop

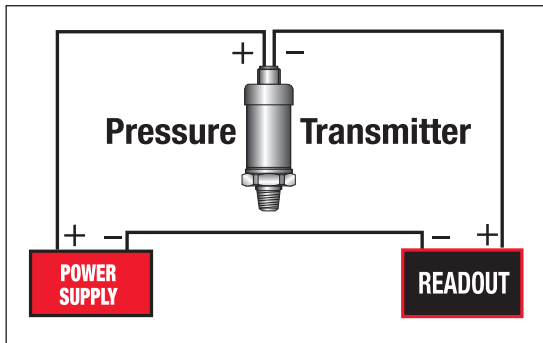

Single instrument 2 wire current loop

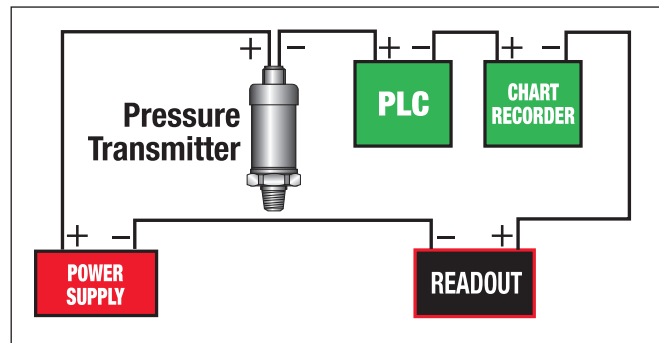

Single instrument 2 wire current loop

For the single instrument 2 wire current loop, the minimum power supply voltage is equal to the required voltage across the transmitter plus the voltage drop across the instrumentation plus the voltage drop caused by the resistance of the wiring.

As an example, for a 100 series (4 mA to 20 mA output) pressure transmitter, $V_{\text{transmitter}} = 10 \text{ Vdc}$

$V_{\text{wiring}} = \text{Resistance of the wiring (handbook data)} \times 20 \text{ mA maximum current flow in the circuit}$. If the instrumentation has an input resistance of 250Ω and if the resistance of the wiring is minimal (100 ft of 24 AWG leadwire has less than 0.6Ω (negligible) of resistance), then the calculation including the leadwire is as follows:

$$V_{\text{min}} = 10 \text{ Vdc} + (250 \Omega) \times .020 \text{ Amp} + (0.6 \Omega) \times .020 \text{ Amp} = 15.012 \text{ Vdc}$$

The power supply must provide at least this voltage with the current consumption of .020 Amp.

In a multiple instrument 2 wire current loop, if the second instrument also has an input resistance of 250Ω , then a second component on the right side of the equation must be included. In this case, the $V_{\text{min}} = 20.012 \text{ Vdc}$. A power supply of 24 Vdc, 1 Amp would be a typical choice.

If there is more than 1 transmitter loop operating off of the same power supply then the current (.020 Amp) must be multiplied by the number of loops. It is recommended that the power supply provide 20% to 30% higher excitation voltage than that calculated above.


Load Limitations 4 mA to 20 mA output
$V_{\text{min}} = 10\text{V} + (.020 \times R_L)$
$R_L = \text{Loop resistance } (\Omega)$
$R_L = R_S + R_W$
$R_S = \text{Sensor resistance } (\Omega)$
$R_W = \text{Wire Resistance } (\Omega)$

Measuring The Pressure Of High Temperature Media

In many applications the medium that the transducer or transmitter will contact may be at an elevated temperature beyond the operational limit of the measuring instrument. Selecting an instrument with a high temperature rating or using diaphragm seals to provide isolation from the medium may not be feasible from a design or economic standpoint.

One way to address this situation is to mount the instrument with a short length of tubing away from the hot area where the measurement needs to be made. With a dead ended pressure chamber, the tubing will effectively dissipate much of the heat and bring the medium in contact with the measuring instrument down to a lower temperature that is within its safe and accurate limit.

The following chart provides the basic information needed to determine the size and material of the tubing needed.

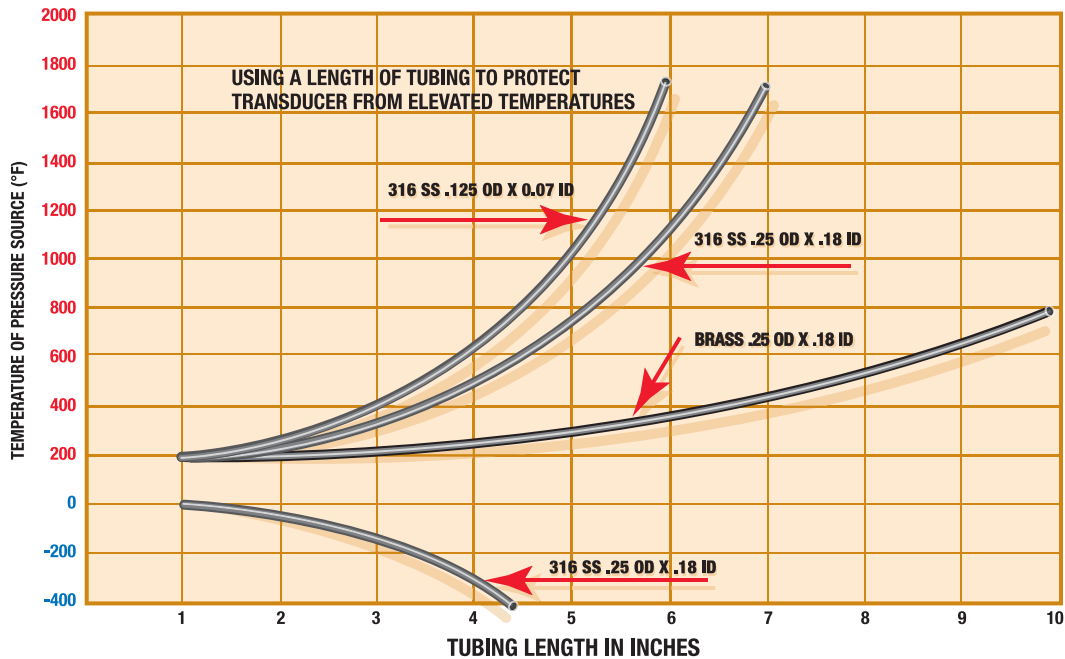

These curves are based upon the following assumptions:

1. The pressure vessel is insulated to limit radiant heat transfer to the transducer – the major source of thermal input is via the connecting tube.
2. The pressure medium has a coefficient of thermal conductivity less than $.4 \text{ btu} / \text{hr} / \text{ft}^2 / \text{ft} / ^\circ\text{F}$. This figure encompasses a wide range of liquids and gases.
3. The ambient temperature T_A around the transducer is 100°F .
4. The heat transfer rate (convection) from the tubing to still air is $1.44 \text{ btu} / \text{ft}^2 / \text{hr} / ^\circ\text{F}$.

Environmental Ratings

IP Environmental Protection Codes

First Numeral - Protection from Particles

- 0 No protection
- 1 Particles >50 mm
- 2 Particles >12 mm
- 3 Particles >2.5 mm
- 4 Particles >1 mm
- 5 Dust protected - limited ingress, no deposits
ingress permitted
- 6 Dust tight - totally protected

IP (first numeral, second numeral), for
example IP67

Second Numeral - Protection from Water

- 0 No protection
- 1 Vertical falling water
- 2 Direct sprays up to 15° from vertical
- 3 Direct sprays up to 60° from vertical
- 4 Direct sprays from all directions - limited ingress permitted
- 5 Low pressure jets of water from all directions - limited
- 6 Strong jets of water from all directions
- 7 Immersion in water from 15 cm to 1 m
- 8 Immersion in water under pressure for long periods of time
- 9 High pressure steam jet up to 100 bar

Environmental ratings on NOSHOK transducers are indicated with the individual specifications throughout this catalog. The following ratings are used and this is how they are defined.

- IP65** Totally protected from dust as well as protection from low pressure jets of water from all directions - limited ingress permitted (no effect on performance)
- IP67** Dust tight and capable of immersion in water from 15 cm to 1 m
- IP68** Capable of immersion in water for long periods of time.
- IP69K** Capable of steam jet washdown.

Since IP65, NEMA 4 and NEMA 4X are related, the differences are in the standards used in qualification. Here they are:

	IP65	NEMA 4
Method	Stream of water	Stream of water
Nozzle Size	1/2 "	1 "
Distance	10 ft	10 ft
Duration	15 minutes	5 minutes
Direction	All angles	All angles
Pressure/Flow	10 m of water	65 gallons/min.

In order to meet the standard, the IP65 test results allow some ingress of water as long as it does not affect the performance of the instrument. In order to meet the standard, the NEMA 4 test results do not allow any ingress of water. NEMA 4X includes the NEMA 4 standard requirements plus corrosion resistance.

Hazardous Location Classifications (NEC)

Class I: *Areas in which flammable gases or vapors may be present in the air in sufficient quantities to be explosive*

Group A: Atmospheres containing acetylene

Group B: Atmospheres such as butadiene, ethylene oxide, propylene oxide, acrolein, or hydrogen (gases or vapors equivalent in hazard to hydrogen, such as manufactured gas)

Group C: Atmospheres such as cyclopropane, ethyl ether, ethylene, gas or vapors of equivalent hazard

Group D: Atmospheres such as acetone, alcohol, ammonia, benzene, benzol, butane, gasoline, hexane, lacquer solvent vapors, naphtha, natural gas, propane, or gas or vapors of equivalent hazard

Class II: *Areas made hazardous by the presence of combustible dust*

Group E: Atmospheres containing combustible metal dusts, regardless of resistivity; dust of similarly hazardous characteristics having a resistivity of less than 100 K Ω -cm; electrically conductive dusts

Group F: Atmospheres containing combustible carbon black, charcoal, or coke dusts having more than 8% total volatile material; dusts so sensitized that they present an explosion hazard, and dusts having a resistivity of greater than 100 Ω -cm but less than or equal to 1x10⁸ Ω -cm

Group G: Atmospheres containing combustible dust having resistivity equal to or greater than 100K Ω -cm; electrically nonconductive dusts

Class III: *Areas made hazardous by the presence of easily ignitable fibers or dust, but which are not likely to be in suspension in the air in quantities that are sufficient to ignite*

Division 1: Atmospheres where hazardous concentrations exist continuously, intermittently or periodically under normal operating conditions

Division 2: Atmospheres where hazardous concentrations exist only in case of accidental rupture or breakdown of equipment

Hazardous Location Pressure Measurement with NOSHOK Pressure Transmitters

NOSHOK has solutions to your applications in areas with flammable gases and liquids. Let's start with the definitions related to equipment used in hazardous environments:

Intrinsic Safety Protection

Protection in which the measurement system contains only transmitters and associated equipment that are incapable of causing ignition of the surrounding flammable atmosphere. Normally an intrinsic safety barrier is employed between the transmitter which is located in the hazardous area and the downstream receiving equipment. This barrier contains a electrical network designed to limit the energy (voltage and current) available to the protected circuit in the hazardous location under specified fault conditions. NOSHOK 625, 626 and 627 Series are Factory Mutual and Canadian Standards Association approved as intrinsically safe.

Non-Incendive Protection

Protection in which the measurement may contain arcing or sparking equipment but is still incapable, under specified test conditions, of igniting the flammable gas, vapor or dust-air mixture. This applies only in Division 2 environments. An intrinsic safety barrier is not required in this measurement system. No special wiring is required. NOSHOK 623 and 624 Series are Factory Mutual and Canadian Standards Association approved as non-incendive.

Explosion-Proof Protection

Protection in which the enclosure of the transmitter is capable of withstanding an explosion of the specified gas or vapor that may occur within it and of preventing the ignition of a specified gas or vapor surrounding the enclosure by sparks, flashes or explosion of the gas or vapor within, and that operates at such an external temperature that a surrounding flammable atmosphere will not be ignited. Explosion-proof installation techniques are required including special electrical conduit and junction boxes. NOSHOK 621 and 622 Series are Factory Mutual approved as explosion-proof.

Why NOSHOK Is The Best Choice

- Stable sensing technologies mean that there is no need for periodic recalibration. NOSHOK transducers do not have glues, epoxies or adhesives in the transduction portion of the sensor module because such organic agents cause calibration drift with temperature and pressure cycling, and over time in some applications, cause complete failure.
- Broad product offering results in best fit of product configuration to customer application requirements.
- CE compliance and an environmentally hardened design mean maximum performance and reliability in difficult real world applications. Products are manufactured in an ISO 9001 certified facility.
- All product specifications are conservatively stated in the literature so that product performance exceeds customer expectations.
- No specsmanship or games are ever employed, only honest information.
- The calibration of every product is verified in NOSHOK's modern facility with the best available pressure controllers and computerized readout equipment that are at least 4 times the accuracy of the product being checked.
- Highly automated production minimizing the variations in product caused by human labor mean more consistency from unit to unit resulting in interchangeability and consistent performance.
- Simple and proven dc electronics improves reliability and longer mean time between failure (MTBF) characteristics.
- While field failures are few, NOSHOK backs its electronic products with a 3-year warranty that is the best in the market.
- Products provide significant performance and application flexibility at competitive prices addressing the needs of the OEM and the user alike.
- As a privately owned and run business, NOSHOK employees focus on continually improving customer satisfaction.

Specsmanship - What to Look for in Comparing Other Transducers and Transmitters to NOSHOK Products

- Be on the lookout for suppliers specifying "high accuracy" with a low price. In many cases you will find indications of zero offsets and span offsets of up to 2% each. The specified accuracy of NOSHOK transducers includes any offsets and is a true accuracy upon which you can depend.
- If the competitors do not specify a long term stability specification, then this bears out our contention that many of these other sensing technologies do not yield an attractive stability specification otherwise it would be printed in the literature.
- Look out for the "typical" nomenclature or the Root-Sum-Square (RSS) designation. While these methods provide a statistical probability of how most of the products will perform, it means that if a quantity of units is considered then a percentage of the products will not meet the listed specification. NOSHOK specifications are worst case, so all the transducers meet that specification.

NOSHOK Transmitters/Transducers Wiring Diagrams & Electrical Connections for 100, 200, 300, 612, 615/616, 640, 660 and 800 Series


Installation: NOSHOK pressure transmitters/transducers may be mounted in any plane with negligible effect on performance. Although these units are designed and manufactured to withstand substantial shock and vibration, it is recommended that they be mounted in an area of minimal vibration. Always use a wrench on the wrench flats when installing. NEVER use a pipe wrench on the housing or in the area of the electrical connection.

Maintenance/Calibration: NOSHOK pressure transmitters/transducers require no maintenance. Recalibration is dependent on the users Quality Assurance Program. If no program is in place, NOSHOK recommends a 1 year cycle.


Alignment Procedure

Using a pressure source and meter with adequate accuracy, perform the following steps:

- Open sensor
- With no pressure applied, adjust the "Z" potentiometer for the correct Zero output
- Apply the correct full scale pressure to the unit
- Adjust the "S" potentiometer for the correct Span output



SERIES 100

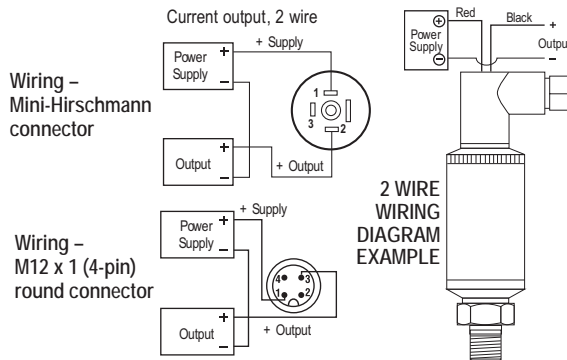


Load Limitations
4 mA to 20 mA Output Only
 $V_{min} = 10V + (.020 \times R_L)$
 $R_L = R_S + R_W$
 R_L = Loop Resistance (Ω s)
 R_S = Sense Resistance (Ω s)
 R_W = Wire Resistance (Ω s)

Series 100	4 mA to 20 mA 2-wire
+ Supply	Red/1/A/1/Brown
+Output	Black/2/B/3/Blue

Example: Red/1/A/1 = Applicable color wire/din plug number/Bendix pin/M12 x 1 pin number/M12 integral cable color wire

SERIES 200

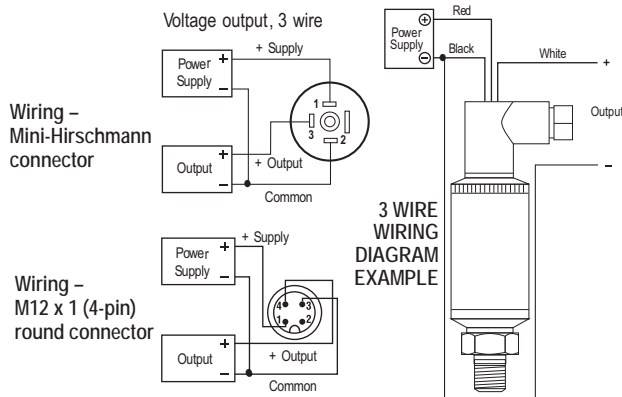


Series 200	0-5, 1-6, -10 1 Vdc to 11 Vdc 3-WIRE
+ Supply	Red/1/A/1/Brown
Common	Black/2/B/3/Blue
+Output	White/3/C/4/Black

Example: Red/1/A/1 = Applicable color wire/din plug number/Bendix pin/M12 x 1 pin number/M12 integral cable color wire

SERIES 612 & 613

2 WIRE WIRING DIAGRAM EXAMPLE



Load Limitations


4 mA to 20 mA Output Only

$$V_{min} = [10V + (.020 \times R_L)] - 0.04352 \frac{\Omega}{Ft.} \times \text{cable length}$$

$R_L = R_S + R_W$
 R_L = Loop Resistance (Ω s)
 R_S = Sense Resistance (Ω s)
 R_W = Wire Resistance (Ω s)

Series 612	4 mA to 20 mA 2-wire
+ Supply	Red
+Output	Black
Case ground	Blue

3 WIRE WIRING DIAGRAM EXAMPLE

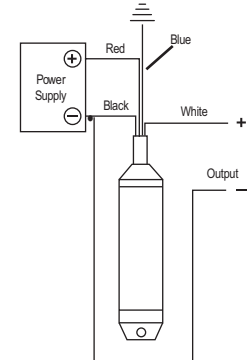

Load Limitations


4 mA to 20 mA Output Only

$$V_{min} = [10V + (.020 \times R_L)] - 0.04354 \frac{\Omega}{Ft.} \times \text{cable length}$$

$R_L = R_S + R_W$
 R_L = Loop Resistance (Ω s)
 R_S = Sense Resistance (Ω s)
 R_W = Wire Resistance (Ω s)

Series 612	Voltage Output
+ Supply	Red
Common	Black
+Output	White
Case ground	Blue

SERIES 615/616

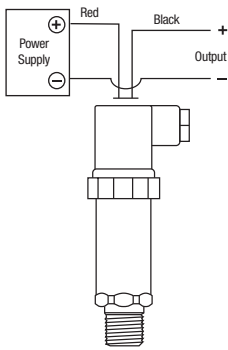


2 WIRE WIRING
DIAGRAM EXAMPLE

Load Limitations 4 mA to 20 mA Output Only
 $V_{min} = 10V + (.020 \times R_L)$
 $R_L = R_S + R_W$
 R_L = Loop Resistance (Ω s)
 R_S = Sense Resistance (Ω s)
 R_W = Wire Resistance (Ω s)

Series 615/616	4 mA to 20 mA 2-wire
+ Supply	Red/1/A/1/1/Brown
+ Output	Black/2/B/2/3/Blue


Series 615/616	Voltage Output
+ Supply	Red/1/A/1/1/Brown
Common	Black/2/B/2/3/Blue
+ Output	White/3/C/3/4/Black

Example: Red/1/A/1/1 = Applicable color wire/
din plug number/Bendix pin/junction
box pin/M12 x 1 pin number/M12 integral
cable color wire



3 WIRE WIRING
DIAGRAM EXAMPLE

SERIES 300




2 WIRE WIRING
DIAGRAM EXAMPLE

Load Limitations 4 mA to 20 mA Output Only
 $V_{min} = 10V + (.020 \times R_L)$
 $R_L = R_S + R_W$
 R_L = Loop Resistance (Ω s)
 R_S = Sense Resistance (Ω s)
 R_W = Wire Resistance (Ω s)

Series 300	4 mA to 20 mA 2-wire
+ Supply	Red/1/1/1/Brown
+ Output	Black/2/2/3/Blue

Series 300	Voltage Output
+ Supply	Red/1/A/1/1/Brown
Common	Black/2/2/3/Blue
+ Output	White/3/3/4/Black



Example: Red/1/1/1 = Applicable color wire/din
plug number/junction box pin/
M12 x 1 pin number/M12 integral
cable color wire



3 WIRE WIRING
DIAGRAM EXAMPLE

SERIES 660

Wiring - Mini-Hirschmann
connector





Load Limitations 4 mA to 20 mA Output Only
 $V_{min} = 10V + (.020 \times R_L)$
 $R_L = R_S + R_W$
 R_L = Loop Resistance (Ω s)
 R_S = Sense Resistance (Ω s)
 R_W = Wire Resistance (Ω s)

Series 660	4 mA to 20 mA 2-wire
+ Supply	Brown/1/1/Brown
+ Output	Green/2/3/Blue

Series 660	Voltage Output
+ Supply	Brown/1/1/Brown
Common	Green/2/3/Blue
+ Output	White/3/4/Black



Example: Brown/1/1 = Applicable color wire/
din plug number M12 x 1 pin number/M12
integral cable color wire

Wiring - M12 x 1 (4-pin)
round connector




SERIES 640

Wiring - M12 x 1 (4-pin)
round connector



Load Limitations
4 mA to 20 mA Output Only
 $V_{min} = 10V + (.020 \times R_L)$
 $R_L = R_S + R_W$
 R_L = Loop Resistance (Ω s)
 R_S = Sense Resistance (Ω s)
 R_W = Wire Resistance (Ω s)


RS 232 Interface

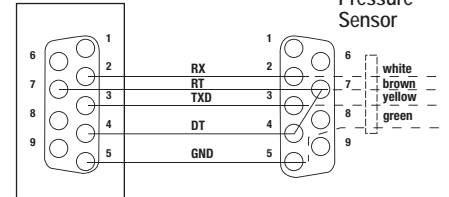


Pressure
Sensor

SERIES 800

4 mA to 20 mA, 2 wire



0 Vdc to 10 Vdc, 3 wire



Load Limitations
4 mA to 20 mA Output Only
 $V_{min} = 10V + (.020 \times R_L)$
 $R_L = R_S + R_W$
 R_L = Loop Resistance (Ω s)
 R_S = Sense Resistance (Ω s)
 R_W = Wire Resistance (Ω s)

Series 800	4 mA to 20 mA 2-wire
+ Supply	Red/1
+ Output	Black/2

Series 800	Voltage Output
+ Supply	Red/1
Common	Black/2
+ Output	White/3

Example: Red/1 = Applicable color wire/din
plug number.

Q: What is the purpose of the ventable & non-ventable fill plug/relief plug?

A: A fill plug seals the fill hole in a pressure gauge case. On liquid filled pressure gauges, a ventable fill plug is used to relieve internal case pressures that occur due to thermal expansion of the fill fluid. In non-filled dry gauges, a non-ventable fill plug is used to occasionally drain the interior of the case from condensate or relieve internal case pressures. Ventable fill plugs incorporate a vent pin to open and close a hole for relieving internal case pressures and do not have to be removed from the case hole like non-ventable fill plugs.

Q: What are the designed overpressure ratings for NOSHOK gauges?

A: Overpressure ratings are specific to the gauge type, pressure range and accuracy ratings of the gauge. Normal overpressure protection can range from 1.1X to 1.3X depending on the gauge selected. NOSHOK gauges comply to the EN-837-1 and ASME B40.1 standards in regards to overpressure protection. When selecting a pressure gauge, it is recommended that the normal system pressure be maintained around half of the full range of the gauge as to avoid overpressure conditions. Overpressure protection of 3 times up to 10 times of the dial range is available on some series as a production option.

Q: How is the accuracy of a gauge affected by a Maximum Indicating Pointer?

A: A Maximum Indicating Pointer (MIP), also commonly referred to as a Tell Tale Pointer, adds an additional $\pm 1\%$ error to the pressure gauge due to the increase load on the Bourdon tube.

Q: What is a Certified Calibration?

A: Certified Calibrations provide the user with a serial numbered gauge along with a calibration certificate that it has been certified in accordance to the pressure gauge standard with instruments that are traceable to NIST with accuracies of at least 4 to 1.

Q: What is a Certificate of Conformance?

A: A Certificate of Conformance is a formal statement on company letterhead stating that an instrument complies with a particular standard. It contains the signatures of the required personnel. These Certificates are often needed to show industry inspectors that a system and its components are in compliance.

Q: How often does a gauge need to be calibrated?

A: NOSHOK pressure gauges require little or no calibration within the Warranty period. Some applications may be more aggressive than others, resulting in an increased frequency in the need for calibration. The environmental limitations for the pressure gauge series should be observed in all cases. Gauges used in situations outside these requirements may result in inaccuracies, premature wear and/or failure of the gauge and would require additional maintenance. The frequency of calibration, therefore, is up to the user to judge.

Q: When is it recommended to use an orifice?

A: Orifices are a type of snubber. On pressure systems that have rapidly increasing or decreasing pressure spikes, orifices lessen the effects of these energy pulses by blocking the wave energy using restricted flow. They are recommended in dynamic pressure applications with mild pressure spikes.

Q: When is a diaphragm seal used, and when would you apply a diaphragm seal and capillary?

A: A diaphragm is used to isolate and protect the instrument from the process media. Damaging process media may include corrosives, particulates, temperatures, or any state that is not suitable for direct contact with the measuring element. Diaphragms indirectly transmit system pressures by segregating the process pressure with a thin flexible membrane that in turn transfers the pressure through a fill fluid to the instrument. Diaphragms are often used in conjunction with capillaries to further distance the instrument from the process media. Capillary tubes transmit the diaphragm fill fluid to the instrument. Capillary tubes come in several lengths and provide the user a means to measure in a remote location and may also act as heat dissipaters in high temperature applications.

Q: What is the purpose of liquid filling a gauge, and in what applications would a liquid filled gauge be used?

A: Primarily, in applications that have vibrations or pulsations, liquid filling enables reading the dial pointer by dampening the movement. Liquid filling should be considered in any system that has high dynamic operating conditions. In general, liquid filling helps extend the life of a gauge. It reduces damaging resonance induced fracturing, reduces frictional wear, prevents aggressive ambient air from entering, prevents condensation formation, and improves reliability.

Q: How does temperature affect the accuracy of a pressure gauge?

A: Temperature changes affect the stiffness of a Bourdon tube. The stiffness change is produced by a combination of changes in the elastic (Young's) modulus and a change in linear dimensions due to linear expansion and contraction. The error caused by temperature change will follow the approximate formula: $\pm 0.04 \times (t_2 - t_1) \% \text{ of the span}$.

Q: How do you select a pressure gauge relative to process pressures, normal operating pressures, and maximum pressures in the process? (Dynamic or static process pressures)

A: The pressure range of a gauge should be 10% over the maximum working pressure in static conditions (no pressure fluctuations). In dynamic conditions, the gauge range should be 40% over the maximum working pressure. Ideally, the pressure gauge range should be selected for a midscale reading during normal operating pressures.

Q: What applications require the various lens materials, and to what maximum temperature can each be subjected?

A: Lens materials include Instrument Glass, Laminated Safety Glass, Tempered Glass, and plastic. Glass lenses are used for abrasion, chemical and wear resistant properties. Laminated Safety Glass reduces the possibility of shattering if the Bourdon tube ruptures. Tempered Glass is 2 to 5 times stronger than Instrument Glass. Plastic lenses are used for impact, corrosion and chemical resistance. Special attention should be paid to the temperature and corrosive environments. Polycarbonate is selected for its superior impact resistance, acrylic for its clarity and scratch resistance and Homalite for its superior chemical resistance. In general, gauges with plastic lenses should remain below 140° F.

Q: In what situation would a pigtail syphon be used?

A: Pigtail syphons should be used in steam applications and systems that contain superheated vapor. The pigtail buffers the instrument from the damaging effects high temperature steam by holding system fluid in the coil to provide a steam trap for the fluid to condensate and dissipate the heat.

Q: What is the application for a gauge cleaned for O2 service?

A: Oxygen (O₂) cleaning is performed on gauges that are used on oxygen service applications. The cleaning removes all hydrocarbons (oil and grease are common hydrocarbons) that can react violently, resulting in explosions, fire, and injury to personnel and property. Oxygen clean gauges can be used in any application that requires the cleanliness level associated with oxygen clean gauge. Glycerin fill gauge cannot be used on oxygen systems.

Q: What fill fluids options are available, and in what applications would each be used?

A: Glycerin is the most common fill fluid. Because of its unique fluid properties, Glycerin has become the standard for liquid filled gauges (see "What is the purpose of liquid filling a gauge?"). Glycerin's clarity, viscosity, stability, cost, solubility, low toxicity make Glycerin an ideal fluid for many applications. Mineral oils and silicon fluids are used when temperature extremes, chemical compatibility or viscosity fall outside of Glycerin use. Halocarbon® is an inert fluid that is compatible with chlorine, oxygen service, and some high temperature applications. Keep in mind that Glycerin is not compatible with strong oxidizers such as oxygen, chlorine, hydrogen peroxide, or nitric acid. Glycerin & Silicon are explosive in contact with chlorine. Halocarbon® is explosive in contact with Aluminum and magnesium.

Q: What is the difference between the ASME B40.1 and EN 837-1 specification?

A: The American National Standards Institute (ANSI) approves American National Standards which include the American Society of Mechanical Engineers (ASME) standard ASME B40.100. This Standard (B40.100) is confined to analog, dial-type gauges, which, utilizing elastic elements, mechanically sense pressure and indicate it by means of a pointer moving over a graduated scale. The European Committee for Standardization (CEN) is the officially recognized European standards body that develops European Standards (ENs) which include EN 837-1. The EN 837-1 includes mandatory dimensions, metrology, and testing requirement for sale in the European Union. ASME B40.100 includes similar requirements in a mandatory appendix.

Q: What is the purpose of throttle devices such as throttle plugs and screws?

A: Throttle devices limit the flow to the pressure instrument. They are a type of snubber.

Q: What is the purpose of an over and under load stop in a pressure gauge?

A: The tip motion of a Bourdon tube is translated to rotary motion of a pointer by a linkage and sector gear acting on the pointer pinion gear. Stop pins limit the movement of the Bourdon tube, sector or pointer rotation in over and under pressure conditions that would otherwise move the pointer pinion off the sector gear which would damage the gauge.

Q. What is the difference between a transducer and transmitter?

- A. When these terms originated there was a distinctive difference between the two. A transmitter was referred to as an instrument with a current output signal (i.e. 4 mA to 20 mA) and a transducer was referred to as an instrument with a voltage signal (i.e. 3 mV/V, 0 Vdc to 10 Vdc etc.). As time has progressed these terms are now commonly interchanged for reference to current, voltage and digital output signals.

Q. What is the difference between the proof pressure and burst pressure specifications?

- A. Proof pressure which is higher than the full scale pressure point is the limit that you can go to without affecting the performance and calibration of the transducer. The burst pressure on the other hand is the limit that you can go before there is pressure chamber rupture and damage. An overload limit specification used sometimes means that proof and burst ratings are identical.

Q. Will the series 1800 Attachable Loop Indicator work with transmitters not made by NOSHOK?

- A. The series 1800 indicator will work with any brand that has the same pin connections and style Hirschmann connector and sufficient power supply voltage to drive all instruments in the loop. The series 1800 will use 3 Vdc to operate.

Q. What does RFI, EMI and ESD mean related to pressure transducers and transmitter?

- A. Radio Frequency Interference and Electromagnetic Interference refer to the effects electrical noise can have on instruments. RFI frequently comes from hand held walkie-talkies and EMI comes from AC motors in the vicinity of the instrument. ESD (Electrostatic Discharge) comes from many sources including the application itself. CE compliant transmitters and transducers incorporate protection techniques and components to minimize most of the interference.

Q. Can traditional diaphragm seals or gauge protectors be used with pressure transducers and transmitters?

- A. Most diaphragm seals can be used with pressure transducers and transmitters. The real key is to assemble and fill the seal properly, being careful not to entrap air in the fill fluid.

Q. Are pigtail steam syphons used in transmitter applications?

- A. The steam syphon is necessary in steam pressure applications. It is important to isolate the transmitter sensing diaphragm from the high temperature encountered with steam pressure applications.

Q. Can orifices and snubbers be used and why would they be needed?

- A. As with other pressure measurement instruments including gauges, pressure pulsations and spikes, are issues with pressure transmitters. Whenever the pressure of an incompressible fluid is measured, there is the potential for pulsations and spikes, which can damage pressure transmitters. An orifice installed in the pressure connection by NOSHOK can protect the transmitter from damage. Where there is the possibility of clogging the small orifice, an attachable piston snubber is recommended.

Q. What is the reason for the vent tube in the cable of the 612 and 627 Series submersible level transmitters?

- A. All pressure measurements are inherently differential in theory. Gauge pressure is referenced to ambient atmospheric, absolute pressure is referenced to vacuum contained in an evacuated chamber within the transmitter. The level measurement is also a differential measurement, with its reference to ambient atmospheric pressure. In order for the submersible level measurement to be referenced to atmospheric, the cable contains a vent tube which runs the complete length of the cable and "vents" into the atmospheric pressure at the junction box connection which is out of the liquid.

Q. How does the series 612 and 627 submersible level transmitter measure level?

- A. The transmitter measures the hydrostatic pressure produced by the liquid level higher than the point where the instrument is located. The higher the liquid, the higher the pressure.

Q. NOSHOK transducers and transmitters are normally 2 wire or 3 wire in output configuration. Is a 4 wire transducer available?

- A. Voltage output transducers are available with a 4th connection which is electrically the same as the power supply common to connect to wiring configurations that require it.

Canadian Registration Numbers

CRN documents are available at www.noshok.com.

Category:	F. Measuring Devices
Type of Fitting:	Including pressure gauges, level gauges, sight glasses, level or pressure transmitters
Alberta	0F15217.52
British Columbia	0F15217.51
Manitoba	0F15217.54
New Brunswick	0F15217.57
Newfoundland & Labrador	0F15217.50
Northwest Territories	0F15217.5T
Nova Scotia	0F15217.58
Nunavut	0F15217.5N
Ontario	0F15217.5
Prince Edward Island	0F15217.59
Quebec	CSA-0F15217.56
Saskatchewan	CSA-0F15217.56
Yukon Territory	0F15217.5Y

[illegible]

[illegible]

NOTES



TO DOWNLOAD OR ORDER CATALOGS,
VISIT WWW.NOSHOK.COM

Quality Policy

NOSHOK is committed to providing a high degree of value and continually improving processes to enhance customer satisfaction by focusing on customer requirements for the design, manufacture and distribution of pressure, level, temperature, and force measurement instrumentation, needle, manifold valves, custom manifold systems for industrial applications and compressed air filters.

All from world class technology.

Combined with real-world stamina.

The highest value with the industry's best warranty.

And all from a company with a 50+ year record of customer satisfaction.

All from your Single Source Instrumentation Company.



Corporate Headquarters

1010 West Bagley Road
Berea, Ohio 44017
Ph: 440.243.0888
Fax: 440.243.3472
E-mail: noshok@noshok.com
Web: www.noshok.com

